
SEPT/OCT 86 VOL.2 NO.6 \$3.00

BULK RATE U.S. POSTAGE PAID

OLTON, OR 97017 PERMIT #51



FOR ALL TIMEX AND SINCLAIR COMPUTERS

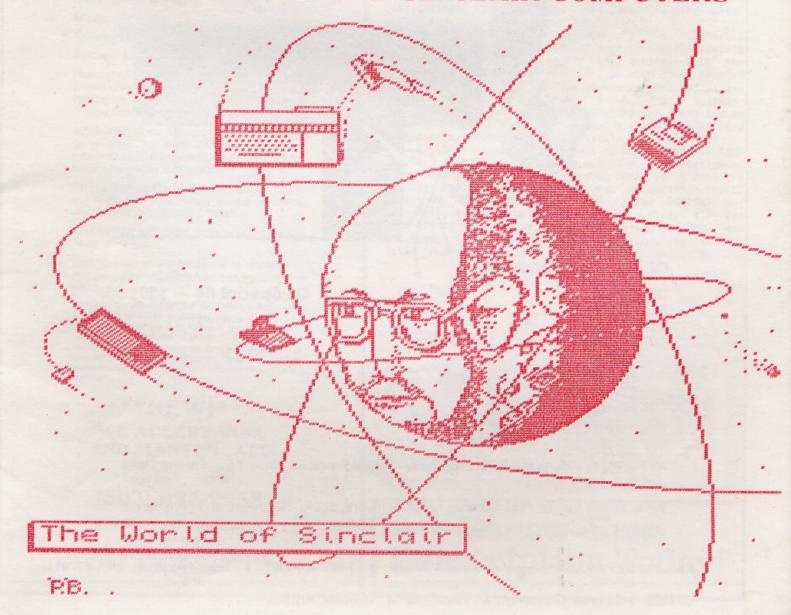



"We know the QL ... We've been appreciating it longer."

QL Special #1 — \$289.95

>QL Computer-free ground shipping >WD Utility Prg. worth \$16.95 >Subscription QL Report \$15.00 >8 Free programs including:

- music program
- windows demo
- graphics pictures
- calculator prg.
- and more

QL Special #2 - \$299.95

> QL Computer

> Free I.C.E. ROM I CON-based front end operating system for QL

> \$8.00 shipping packages include the 4 Psion programs.

These same 4 prgs. are also avail. on the IBM and retail for \$695.00.

- Take 20% off the following if ordered at the same time: ICE, QSpell and/or Centronics I/F



- > QL Computer
- Your Choice of One Piece of Pyramide Software FREE:
 - Wanderer
 - Peintre
 - Othello
 - Nucleon OR
 - Vroom

QL Special #4 — \$299.95

- > QL Computer
- > Free UPS 2nd Day Air Shipping


All Packages include the Psion Programs — Word Processor, Data Base, Spread Sheet and Business Graphics.

Write or call for our FREE Catalog full of Software, Books, Hardware and Peripherals. To place Orders 24 hours a day Call: 1-800-628-2828 ask for extension 950.

P.O. Box 5607 • Glendale, Arizona 85312-5607 • 1-602-978-2902 • Telex (via WUI): 6501267701

OFFICE: 2412 West Greenway • Suite B-10 • Phoenix, Arizona

SEPTEMBER/OCTOBER 86 VOL.2 NO.6



MAGAZINE

FOR ALL TIMEX AND SINCLAIR COMPUTERS

TIME DESIGNS MAGAZINE CO. 29722 Hult Rd. • Colton, Oregon 97017

(503) 824-2658

TIME DESIGNS MAGAZINE is published bimonthly and is Copyright © 1986 by the Time Designs Magazine Company, Colton, Oregon 97017. All rights reserved.

Editor: Tim Woods

Assistant Editor: Stephanie Woods

Editorial Assistant/Production: D.L. Woods

Photography:

(unless otherwise noted): Thomas Judd Printing by; Toad'l Litho Printing and Comp., Oregon City, Oregon 97045

SUBSCRIPTIONS: \$15 a year for six issues (US funds only). No extra charge to Canadian subscribers. All other countries please write for information on air mail rates.

CUSTOMER SERVICE: Customer satisfaction is our goal. For subscription service problems please write or call TIME DESIGNS.

CHANGE OF ADDRESS: Write or call to prevent delay of sevice,

Reproduction of this magazine in whole or in part by any means without written permission is prohibited by law

*NOTICE: Contributors to TIME DESIGNS are independent of the TIME DESIGNS MAGAZINE CO., and opinions expressed in the contents of the magazine are not necessarily those of the management or its advertisers. Time Designs Magazine Co. will not be held liable for any damage or consequences resulting from instructions, assertions of fact, review of products or companies provided in the magazine's content."

NEW! WE ACCEPT VISA AND MASTERCARD





(503) 824-2658

For Books, Subscriptions and Renewals

Note: We must charge a small 4% additional fee for Credit Card Orders

COMMENTS by the editor



Commodore...Soon to join our ranks?

It's been a downhill slide ever since Jack saw the greener grass over at Atari, packed his bags and left Commodore, the company he saw rise to prominence in just three years. Things are bad at Commodore. Real bad. Experts say the the company is losing nearly 120 million a year—that figures out to be around 3 million a week!

If Commodore does bail out, one can only wonder what's in store for countless enthusiasts world-wide. Will the small company and cottage industry be the main source of support, just like our own community emerged two years ago? Will the slick magazines bail out (just like SYNC and TIMEX/SINCLAIR USER did)? A lot of aftermarket software and hardware houses are counting on the health of Commodore for their very existence.

What does all of this mean to you and me? Actually, I want to use Commodore as a "vehicle" for my annual lecture on SUPPORT. Where would we be without our disk drives, printer interfaces, Spectrum Emulators; not to mention some really great home-brew software and various publications? We would have been dead in the water


months ago.

Will our supply of computer "goodies" last. I believe so...but it will require everyones participation and SUPPORT. Unless we send for that great-looking new program or board for our Sinclair, or even just respond to catalog offers that we read in newsletters and mags-we won't have Aerco, E. Arthur Brown, Zebra Systems, Novelsoft, Weymil Corp, Curry, Knighted--so forth and so on. If you have been thinking about a new purchase...now is the time...tomorrow maybe a little too late.

is the time...tomorrow maybe a little too late.

I always wonder as I'm "pasting up" the ads in TIME DESIGNS, just how many readers actually pay attention to them. Some company has paid us good money for a spot in the magazine. This helps offset our production costs. Please SUPPORT our dear advertisers, they SUPPORT us.

Well, another lecture has come to a close. I'll get down off my soapbox now. Enjoy this issue of TDM, and get ready for the next one--our Second Anniversary Issue. And what a celebration that one's going to be!





on the cover:

Regular columnist, Paul Bingham is the cover artist this issue, with his rendering of "The World of Sinclair". Included is the ZX80, ZX81 + 16K, Spectrum (in 2068 clothing) + ZX Frinter, and a QL with Mouse, in Geosyncronous orbit about Uncle Clive. Paul's artwork was done using QL Paint (an updated version of GraphiQL).

Renew Your Subscription Today!

WRITE OR

FOR

OUR

H

H

H

0

ATALOG

L

Z

EW

CIC

H

S

-MANY

Z

EW

ITEMS









CRITICAL MASS (Arcade)

An outlying system of the Terra Federation has set up an advanced anti-matter conversion plant on a centrally positioned asteroid to supply the local colonists with energy. A surprise attack by alien forces has successfully overcome the asteroid's defences and the aliens are now threatening to self-destruct the power plant unless the colonists offer an unconditional surrender. The self-destruction process would effectively turn the power plant into a massive black hole that would wipe out the entire planetary system along with a number of nearby stars. Unconditional surrender offers an equally horrific prospect. Your mission is to infiltrate the enemy position and disable the anti-matter plant before the aliens achieve CRITICAL MASS.

CATALOG #1026 \$15.95



SABOTEUR (Martial Arts Arcade Adventure)


You are a highly skilled mercenary trained in the martial arts. You are employed to infiltrate a central security building which is disguised as a warehouse. You must steal a disk that contains the names of all the rebel leaders before its information is sent to the outlying security stations. You are working against the clock, both in getting to the disk, and in making your escape. You must enter the building from the sea by rubber dinghy, and will then only be able to leave by the helicopter on the roof. You will have to find your way around the warehouse, making use of the guards' own weapon supplies in your struggle through overwhelming odds.

CATALOG #1098 \$15.95

***** DUAL DISC DRIVES & INTERFACE FOR QL -- \$250.00

DUAL DISK DRIVES & INTERFACE FOR YOUR QL COMPUTER

Now you can cut the rising costs of data storage on your QL in half (at least). These 3" drives are answer to your prayers.....top quality and they hold about 160K per side (the "hard" cased floppies can be flipped over) for additional 160K of storage space! And, don't forget the great convienience



DISK DRIVES

ADD 5.00 S&H

(not to mention the super reliability of these disks) of having a second disk drive on line! All this...including and we'll even put the WP,DB,SS, and BG programs on one of the two disks supplied with the drives -- ready to run -- and our regular disk drive interface ALL INCLUDED............NOW ONLY \$249.95!

3" DISKS - (for above) - Encased in hard plastic with a sliding metal "door" to keep dust (& fingerprints) from getting onto the disks. The metal door opens automatically when the disk is put into the drive. BULLETIN - A NEW FACTORY JUST OPENED UP IN HONG KONG TO PROCUDE THE 3" DISKS - WE BELIEVE A PRICE REDUCTION FOR THESE DISKS WILL FOLLOW SOON! \$4.50 each or 10 Disks for \$43.50

KNIGHTED COMPUTERS

707 Highland Street

FULTON, NY 13069

(315) 593-8219



LETTERS

To the Editor,

I really enjoy your magazine and please keep up the good work! I have a question...do you know of any BBS program for the 2068 (using the 2050 modem)?

I have included two graphic printouts that I made using a program that I call "draw". Hope you enjoy them as much as I did making them.


Truly yours,

Clifton Tiddle Diamond Bar, CA

Editor: Clifton, your in luck. I just talked to Eben Brown on the phone, of E. Arthur Brown Co. (3404 Pawnee Drive, Alexandria, MN 56308, 612/762-8847). He has a new BBS program that will be featured in his next catalog. It's called CASBOARD 2068, and is available on either cassette or ABJ wafer. The Load and Save commands are in BASIC, so the program could be easily converted to any disk drive system. CASBOARD, was programmed by Kurt Casby, best known for his LOADER series of programs. Preliminary specifications sound great...and should be a lot of fun setting up a small home-based BBS. Price is \$19.95 plus \$1.95 for postage.

I did enjoy your drawings...and I've printed them

here for others to admire.





To the Editor and the Readers:

Can anyone come up with a simple program for my T/S 2068 which will print the characters immediately on the printer instead of on the screen? With this capability I would like to use the computer and its printer without the TV/monitor to do simple computations. Can anyone help?

Sincerely,

Michael J Nowak San Diego, CA


Editor: I'll forward any possible solutions on to Mr. Nowak that we receive, as well as publish them in an upcoming issue. I assume that the reference to a "printer" means the Timex 2040 thermal printer. C'mon programmers! Dear Tim,

Thank you for showing interest in my little gizmo. I have written to other publications, but no one even answered to say the were not interested. You have my permission to print my address. I will be glad to correspond with anyone who needs more information on adding automatic two-key entry from a one-key closure (to an external keyboard like the TI 994/A surplus keyboard).

Sincerely,

D. (Sandy) Rea Rt. 1 Box 18 Priest River, ID 83856

Editor: I appreciate you sharing your circuit diagram with us.

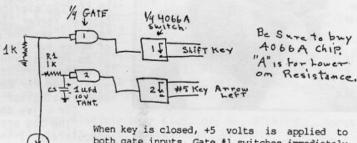

Keyboard Key Carsor Left

both gate inputs. Gate #1 switches immediately closing switch #1 in 4066 for shift function. Gate #2, because of delay in charging Cl thru Rl switches after gate #1, closing switch #2 for cursor-left function. If this circuit is duplicated for more functions such as shift cursor-right, the shift key sections of the 4066 may be tied in parallel, as many sections of the 4066 may be done this way, as desired. The gates' chip can be any OR Function chip, TTL, CMOS or LS.


Tim:

I remember some time ago in TDM that you asked readers to send some simple programs for publication, so enclosed is one for the 2068, which you may use if you wish. As you can see, this calculates the number of days between any 2 dates (I think the limits are 1900 to 2010) and accounts for leap years, also.

By the way, in the Jan/Feb 86 issue, page 3, you published a T/S 1000 "bubble sort" for a reader. I could not make the program work without deleting line 230 (LET N=1).

> Leo Schroeder Billings, MT

1 REM DAY BETWEEN DATES
POKE GIVES KEY BEEP
10 LET 0=24 (MG): LET J=INT (2
75 *M/9) - INT (7*Q+7)/4+367*Y+D-IN
924 INPUT "FIRST DATE" HO-DAY-Y
R", M,D,Y; PRINT "FIRST DATE"; M;
925 GO SUB 100: LET J1=J
926 INPUT "LAST DATE" MO-DAY-YR
",M,D,Y; PRINT "LAST DATE"; M;
",M,D,Y; PRINT "DAYS BET 926 GO SUB 100: PRINT "DAYS BET







What's In A Name?

Early in 1983, advertisements for RAMEX INTERNATIONAL appeared in the national Sinclair magazine SYNC. Ramex, of Utica, Michigan, sold external ZX81 keyboards, RAM packs, among other items. With the advent of the 2068, the company expanded further, under the direction of general manager, Scott Duncan. They obtained the exclusive marketing rights to TASWORD TWO word processor from Tasman Software in Great Britain. Later on, after Timex bailed out of the U.S. computer market, Ramex imported a Spectrum disk drive interface for the T/S 2068 and coupled it with quad drives as a package...it was called the "Millennia K". An "overkill" with the quad drives later led to an Amdek 3" disk system. Then in February of 1986, Ramex_announced

that they were no longer supporting Timex computers or their disk drive system, but instead opted to carry the American version of the QL from Sinclair Research plus peripherals and software. They changed the name Ramex International to FOUNDATION SYSTEMS. About the same time, they moved from their original facilities to an address in Washington, Michigan. A new public relations manager wrote a review on the QL, which appeared in the February issue of Computer Shopper.

When A+ Computer Response of Keene, New Hampshire, took over distribution of the QL in the U.S., Foundation Systems became a fully

authorized dealer.

In June and July of this year, several readers of TDM wrote, requesting assistance in contacting Foundation Systems, because QLs they had sent for were not being delivered. What TDM learned was that the distributor, A+ Computer Response was receiving similar complaints, and that Foundation's phone number had been disconnected. A spokesperson for A+ informed TDM that Foundation was no longer an authorized QL dealer.

By surprise, in August, TDM was informed by Surprise, in August, IDM was informed that once more, another company had surfaced using the same Washington, Michigan address...it is called MATRIX TECHNOLOGIES. The company took out a small ad in the September 1986 issue of Family Computing Magazine. The new product? IBM PC clones for \$399.

Sir Clive's Confessions

Entrepeneur extraordinaire, Sir Clive Sinclair, has ended several months of silence, following the sale of major interests in his company that pioneered low-cost home computers, to Amstrad Consumer Electronics PLC. Last week, Sir Clive came out of seclusion and spoke with the British press. The following comments were taken from two separate interviews relating to questions posed about Sinclair microcomputers.

Sir Clive on the Spectrum-"The Spectrum was and still is an enormous success although it is showing it's age a bit. I was rather surprised to see it turn out to be a games machine...we really knew very little about that side of the market."

What about the QL?

"I think the QL was an interesting idea...a sophisticated machine, but in the end it didn't work out very well, as we had originally anticipated. The market for a 68000-based micro wasn't as big as research led us to believe. The QL had teething troubles early on. The truth was, that when the project came up, that later became the QL...I wanted to do the whole thing on the Z80 microprocessor, but most of the engineers and Nigel [Nigel Searle, former Sinclair Marketing Director] wanted to do it on the 68000. I couldn't see the point of that because it seemed to me you were paying a lot of money for the chip and I couldn't see what you were going to be able to do on it that you couldn't already do on the Z8O. Sure it was a bit faster in principle...but it wasn't that in practice. Looking back there was no need to go for 68000 technology. We just haven't found a way to use the 68000 that gives any extra benefit to the customer.

Sir Clive on the Microdrives-

"The bad press the Microdrives received was unfounded, I'd defend them absoulutely. I think they were a marvelous approach to low cost mass storage. Their technology and application should be studied further.

What about the Pandora?

"I want to go ahead with the Pandora project. It will not be compatible with either the Spectrum or QL, as we have lost all rights to their technology. I think it will be best in a way, as it opens the door for a new and customized operating system. Most of the portable computers available are compromises of one sort or another. To me, a portable computer must be totally portable and no trouble to use."

Amstrad director, Alan Sugar?

"I hope to keep in touch with Alan Sugar, and I like him very much." Sir Clive's future?

"I am most happy right where I am now..tinkering with new projects for the future. To be perfectly honest, I have never felt comfortable playing the business manager role.

NOVELSOFT Emerges As Premier TS Software House

If one were to imagine what the ideal Timex/Sinclair software company would be like, some attributes might include a full time office, open for customer's questions and support, professional products with "complete" documentation at a fair price and prompt order processing. NOVELSOFT of Toronto, Canada, may come close to filling the bill.

The reviews are out, and the word is spreading fast about recent software releases from Novelsoft; TIMACHINE, quite possibly the best BASIC Compiler ever for Sinclair computers; ARTWORX Version 1.1, a sophisticated graphics package; and a brand new release called THE WORX!, which is a collection of useful mini-programs. All of these releases are on their way to achieving "hit" status in the T/S community...a small accomplishment that would blush next to the giant software houses, but a respectful one never the less.

According to Novelsoft, Senior Partner, David Ridge, the company was started to promote their programs in Great Britain. They have had some interested U.K. software publishers, but the current situation in England with Amstrad and the Spectrum, has put a halt to most major investments. The whole industry is waiting to see what will happen next.

Novelsoft has generously included a version of their popular programs on one side of the tape for the Timex/Sinclair 2068. The other side has a

Spectrum version of the program.

Product/Dealer News

Sinclair telecomputing experts Ed Grey and Dave Clifford (G & C Computer Products), based in Southern California, have officially announced the release of SPECTERM-64 terminal software and the Z-SI/O card, an RS-232C interface for the T/S 2068. The Specterm-64 software will operate on a Spectrum-emulated T/S 2068. A stock 2068 version is planned for a later release. The terminal software includes a true 64 column display, uses XMODEM protocol for file transfer, will transfer all control characters including ESC, has a 35K+ buffer, and is fully compatible with the T/S 2050 modem and the Sinclair Microdrives. Specterm-64 comes with extensive documentation, and a special version configured to run the Z-SI/O card. The card was designed and manufactured by Dave Clifford, who also developed the Z-LINK Spectrum interface in 1985. Z-SI/O includes a standard RS-232 connector (DB 25 pin), and a full buss feed-through. It will drive a wide range of peripherals, including any 300 and 1200 baud modem (including Hayes compatibles) with the 2068. Note: Specterm-64 can be overlayed to run almost any RS-232 I/F currently available for the T/S 2068, including the circuit featured in the March/April 1986 issue of TDM. Specterm-64 also has built in 1200 baud compatible routines. Price for Specterm-64 is \$30.00 plus \$2.00 S&H in U.S. (Canada add \$2-U.S.funds). The Z-SI/O card is \$75.00 plus \$3.50 S&H (Canada add \$2). Additional information can be obtained by writing Ed Grey or Dave Clifford at: PO Box 2186, Inglewood, CA 90305, (213) 759-7406 or 516-6648.

Another good value for your T/S modem-ing dollar, is the LOADER V software package by Kurt Casby (25 Battle Creek Court, St. Paul, MN 55119). It is an enhancement for the 2068, 2050 modem and MTERM (Smart II) terminal software. Loader V is the final suite in the "Loader" series previously offered by Mr. Casby. Loader V features: An additional 20 number dialing directory, an auto-repeating dialer, capability to Load Mterm buffer with any standard "Bytes" file, Loads text files created with either TASWORD II or MSCRIPT into Mterm's buffer, an XMODEM protocol, among several other userfriendly features. The program on cassette with complete

documentation is priced at \$9.95. Robert C. Fischer, producer of PRO/FILE EXTENSIONS, T/S GRADER, WORD PUZZLER, and WORD GAMES, has changed his address and can now be found at Rt 2, Arizona St.,

Emerson, GA 30137.

QL SCREEN DUMP is a utility program that allows the user to dump items produced on the screen in SuperBASIC, to any Epson-compatible printer. QL Screen Dump is written in fast, compact machine code and reportedly takes up less than 3/4K RAM. The program is available for \$24.95 from E-Z KEY, Suite 75, 711 Southern Artery, Quincy, MA 02169.

The English Micro Connection of Newport, Rhode Island, closed it doors for good on August 5th, due to some "serious health problems". EMC owner and operator, Bob Dyl was an early supporter of TIME DESIGNS, and gave TDM several news items of Sinclair computing in Great Britain, obtained from several trips that Bob made to England. The editorial staff of TDM wish Bob a speedy recovery and best wishes for the future.

Knighted Computers, 707 Highland St., Fulton, NY 13069, (315) 593-8219 has obtained some stock and items as a result of the closure of EMC. For information and prices on some interesting QL goodies, write to either

Ray or Joe at Knighted.

Stan Lemke, a regular columnist for TDM, and owner of Lemke Software Development (2144 White Oak, Wichita, KS 67207), has done it again. His new program, COLOSSUS, looks like a winner. The program is a graphics banner designer package that allows the user to create a banner 32 screens long, with a variety of font styles/sizes, and add low-resolution graphics on, over and around the banner text. There are also extensive editing features. Printing is to either 2040 or a full-size printer, with modifications by the user for specific printer/interface combinations. A bonus feature of Colossus is a "movie animation" function, that flips a total of 32 screens at the rate of four screens per second for an interesting effect. The program is available on cassette, with full documentation, and a sample animation file, for \$19.95 (postage included).

HIGH RESOLUTION programming for ZX81-based micros, is the trend, up at Fred Nachbaur's workshop (address: C-12 Mtn. Stn. Group Box, Nelson, B.C., V1L 5P1 Canada). We're not sure exactly how he does it, but we do know it takes a lot of memory. Fred's latest offering is a highres maze adventure game for the Timex 1500 with either a 16K RAM pack or 8K Hunter Board (purchasers must specify which version). A later version for the ZX81 and T/S 1000 will be released. DUNGEON OF YMIR, is 100% machine code, with monsters and multi-levels. Price is \$24.95. Other hi-res programs are available.

Users Group Update

T/S User Group Correspondents: Send us your group's address and we will list it in an upcoming issue. We will also print announcements, special events and User Group news (if it's brief).

Anyone interested in forming a T/S User Club in the Leesburg area of (Central) Florida, should contact Warren Fricke, 225A Highland Dr, MFL, Leesburg, FL 32788 or phone (904) 589-2729.

Timex-Sinclair User Club, c/c Mr. Richard K. Norek, 188 St. Felix Ave.k, Cheektowaga, NY 14227.

Timex-Sinclair User Group, 1545 Alta Vista Drive, Apt. 1402, Ottawa, Ontario, Canada K1G 3P4.



Over 45 guests attended the Grand Opening and Open House at the new facilities of Time Designs Magazine on August 30. Attendees included some members of CATS and PATS Users groups of Oregon, as well as a number of subscribers from the Northwest. Highlights included a QL demonstration by TDM writer, Mike de Sosa; preview of LIGHT SHOW 2000 (a program featured in this issue) by the author Michael Carver; Sinclair merchandise was displayed and sold by RMG Enterprises; and there were door prizes and refreshments. The day was enjoyed by all those who came. Tim Woods, Editor of TDM, announced that the Open House would be an annual event.



端 LIGHT \$ SHOW

Revox (a manufacturer of "Top-of-the -Line" audio equipment) recently introduced a cassette deck with an RS232 port, allowing control of the unit via a computer. For a mere \$1,400.00, this cassette deck could be yours. LIGHT SHOW 2000 will turn the tables on the Revox for about 1/100th of the cost. LS 2000 is a program which will allow your cassette deck (or any other musical source) to control your computer.

LS 2000 will poll the ear port of your TS 2068 and decipher any pulse detected into one of four tonal groups (the shorter the pulse, the higher the note). Depending on the tone detected, a corresponding color pattern will be displayed on the screen. The user has control of the tonal groups, colors, duration of display and the speed at which the tones will be read. This flexibility allows one to "view" the same piece of music in a multitude of ways, or to tailor the program to a certain musical selection. LS 2000 comes with one preset Set-Up to "display" music and provides for four user-defined set-ups.

LS 2000 HOOK-UP

To use LS 2000, some means of providing a musical source to the computer must be used. There are several ways of accomplishing this, some more flexible and preferable than others. The simplest means is to hook up a wire directly from the speaker of a stereo system to the earphone jack of the TS 2068. (IMPORTANT: Do not hook up more than one channel of a stereo system as this may damage the stereo amplifier.) This can be done by running speaker wire from the rear connectors of a speaker (or from the speaker output of your stereo) to your computer. Do not leave the speaker disconnected from the amplifier. A phone jack can be attached to the ends of the speaker wire and plugged directly into the computer's ear jack. Or alligator clips can be used to make a connection to your computer patch cords. The drawback of this approach is lack of control over the signal going into the computer. If the music is played at a low volume, the signal may be too low. Conversly, "Heavy Metal" from a 200+ watt system at full blast may cause your 2068 to become light dust.

If the tape recorder you use with the 2068 will play through the earphone jack while in record mode, it can be used to feed the sound source into the computer. A similar wire will be needed to plug into the microphone jack of the recorder, as previously discussed. Run

a patch cord from the earphone jack of the recorder to the earphone jack of your computer. Place a tape in the recorder and set it to record. If you opt for this method and plan to play your music at medium to high volume, I would suggest placing an attenuater in-line between the microphone input and the speaker wire from the stereo. (An attenuater may be obtained from Radio Shack for \$1.99 -- Part #274-300. This part has an RCA jack for input and a regular mic/earphone jack for output.) This will help prevent distortion and possible overloading of your recorder. The preferable choice is to use Radio Shack's mini-amplifier (\$11.95 -- Part #277 -1008). The hook-up is the same as with the tape recorder. This method will allow control of the signal volume going into the computer. Once again, use an attenuater, if the musical source is to be played at any volume. If LS 2000 does not respond to inpute while using the attenuater, the attenuater should be removed. (NOTE: This mini-amplifier can be used to boost the output of computer tapes you may have difficulty loading. It also can be used to amplify BEEP output from your computer.)

A "walkman" type cassette player can also be used to supply music to the computer if it has two headphone jacks. Use one of the jacks to run a patch cord to the computer.

USING LS 2000

Upon running LS 2000 you will be presented with a main menu (see example 1). "ENTER LIGHT SHOW" (Option 0) will pulse color patterns on the screen based on the input through the ear port. (NOTE: To return to the main menu while in this mode, press the "q" Key.) Option 1, "SYSTEM SET-UP", will provide a second menu allowing the user to select 1 of 5 permutations of LS 2000 (see example 2). The current set-up is highlighted via BRIGHT. (NOTE: If any of the parameters are changed, no current set-up is shown.) This menu also allows viewing of the parameters for any compiled set-up (Option V). Option S will define a set-up based on the current setting (i.e.; mode, colors, tone, pulse, tempo). The user is prompted to choose a number to be compiled (2-5) and for a name. When this new definition is compiled, it then becomes the current set-up.

From the main menu, the user can create different set-ups or setting. By changing any of the various options (2-6), LS 2000 can be customized to any musical input or user preference. The best way to learn what each option does is to experiment. After changing an option, one can view the results by "Entering Light

PARTS LISTS


Radio Shack Pa	rt # Descript	ion			Price
42-2370	Patch cord w/R			Control of the Contro	
	stripped wire		30	ın.	• 1.69
42-2371			72	in.	• 1.89
42-2372			144	in.	\$ 2.19
Choose the	bove to be used with length to fit your r to stripped ends if	eeds	. Sp		
274-300	RCA Phono jack reducer (atter			signal	* 1.99
274-287	Red 2 conducto plug (2 per pa			hone	* 1.29
				The state of the state of	

ENT	ER	LIG	нт	SH	lou											
575	TEM	SE	T-U	P.												
SET	но	DE.														.:
SET	co	LOR	5							٠.						.:
TON	E C	ONT	ROL							٠.						
SET	PU	LSE					٠.									. !
SET	TE	MPO		٠.												
SAU	E/L	OAD	SE	т-	UP	5		•	•		•	•	•	•	•	

example 1







Mode

80

240



e/Fine

Pulse

10/176

Show". Each setting option is provided with prompts and explanations from within the program. (See Sample Setups for examples.) Depending on the type of music or the quality of the input (dynamic range), one may need to retune the tone control. Tone O is the highest tone range, Tone 3 the lowest. The number assigned to a tone is the upper limit at which LS 2000 will produce a pulse.

The Save/Load option allows the saving of favorite compiled setting to tape for later retrieval.

DEFRULT SETTING..... Speed-0.....3 SETTING NOT DEFINED...... COMPILE CURRENT SET-UP...... VIEW SET-UP...... RETURN TO HAIN HENU......

example 2

BEHIND THE SCENES

When the TS 2068 is loading a program from tape, it reads through the ear port (port FEh) the signals recorded on the tape. The data needed to send the program is tored in bit 6. If the bit is set ("1") the frequency of the signal is 1020hz, if it is not set ("0"), the frequency is 2040hz. The frequency is determined by the length of the pulse detected. Port FEh also uses bits 4-0 to poll the keyboard. By sending out this port, BORDER colors can be controlled (bits 2-0) or a BEEP can be triggered through bit 4. When a program is sent to tape, bit 3 of port FEh is used. The threshold of the ear port is 23khz, with the input being 4-10 volts p-p.

KEYING IN THE LISTING

Carefully key in the BASIC listing. After you have typed in the program, SAVE the listing to tape before running the machine code loading routine. To load the machine code portion, ENTER as a direct command [RUN 9000]. This portion of the program will POKE the machine code into its proper address. It also checks for various typing errors and will provide instructions in case an error was detected. After the machine code has been placed in memory, the program will set up the User Graphic "A", delete this portion of the program from the listing, and prompt you to SAVE & VERIFY the completed program along with the compiled code. After VERIFYing, the program will self-run. Go ahead and try it out. NOTE: In Line 3, the A in quotes is typed via GRAPHIC mode [Caps Shift/9] [A] [Capts Shift/9].

Tone Limit Timing Co	uri
#1 #2 #3 Tempo	

		240	200	172	160	10/256	1/1
Laid-Back	1	245	208	192	160	10/1	12/256
Speed-0	0	215	208	192	160	2/150	1/1
Pulser	0	215	208	192	170	1/1	10/176
Ripple	1	215	208	192	170	3/100	10/176

SAMPLE SET-UPS

BASIC LISTING

Lines	Notes
1-3	Sets up the screen with the patterns to be "pulsed" by LS 2000. NOTE: Even when the screen looks blank, the complete pattern is still on the screen, as INK has been set the same color as the PAPER.
	The machine code simply sets the ATTRIBUTES to the proper INK color. Check this out by changing the INK color in Line 1 to "7". Add Line 9 STOP. As direct command (GO TO 1)

10	The POKE sets lower case only. This is the USR call
	for the machine code portion of LS 2000.

100-120	Contains data	for	line/column	placement	of LS	2000
---------	---------------	-----	-------------	-----------	-------	------

000-1010	Main	Menu
----------	------	------

2000-2100	System	Set-Up	Menu

2200-2240			nanamatana				
2200 2240	Compiles	Current	narameters	 -	dattand	Cat-II-	

2700-2720	-	16	100				
2000-2020	POKES	parameters	into	Machine	Code	25	current

2999	Contains	addresses	of	Machine	Code	which	hold
	parameter	s for curre	nt s	Set-Up			

2000-2020	Option	2	 Set	Mode	
2000-2020	Option	2	 Set	Mode	

3200-3280 Option 4 -- Tone Control

3300-3390			Control				
	Control.	NOTE:	This subro	uti	ne is s!	nared	by both
	Options.	Control	of Option	1 =	decoded	1 by	variable

4000-4200	Save/Load Option. Also allows for verification	
	SAVE and LOAD without Breaking the program with ROM Error Report.	•

8000-8020	Subroutine	to	skan	keyboand	 	

9000-9420	_					
7000-7420	Pout ton	+-	DOVE I	M b d	0-4-	

9998-9999 Routines to SAVE and LOAD LS 2000

> The author will provide a copy of this program on tape for \$4.00 (includes shipping). Please send a check or money order to: Michael E. Carver, 1016 NE Tillamook, Portland, OR 97212. Please specify "Light Show 2000".

LIGHT SHOW 2000

1 BRIGHT O: BORDER O: RE STORE : PAPER O: INK O: CLS : L ET x=2

2 FOR a=1 TO 69: READ y: IF y =255 THEN LET x=x+1: NEXT a 3 PRINT AT x,y1"A": NEXT a 10 POKE 23658,0: RANDOMIZE USR 45056: INK 9: GO TO 1000 100 DATA 15,255,12,18,255,15,25 5, 10, 13, 17, 20, 255, 15, 255, 8, 12, 1 4,16,18,22,255,10,15,20,255,12, 14,16,18 110 DATA 255,7,9,11,13,15,17,19 .21.23

120 DATA 255,12,14,16,18,255,10 ,15,20,255,8,12,14,16,18,22,255 ,15,255,10,13,17,20,255,15,255, 12, 18, 255, 15

130 DATA O, BIN 1000010, BIN 1111 00, BIN 11000, BIN 11000, BIN 1111 00, BIN 1000010.0

140 RESTORE 150: DIM s(5,14): F OR a=1 TO 14: READ b: LET s(1,a)=b: NEXT a: DIM s\$(5,31): LET s#(1)="DEFAULT SETTING...... ": LET ds="......

...... FOR a=2 TO 5: LET s\$(a)=d\$: NEXT a 150 DATA 1,0,240,208,192,160,6, 3,5,2,10,0,1,1

160 LET current=1: DIM b\$(32): DIM c#(3)

1000 PAPER 1: BORDER 1: CLS : PR INT AT 0,8; INVERSE 1; "LIGHT SH OW MENU"; AT 4,0; INVERSE 0; "ENT "SYSTEM SET-UP......

..1*''*SET MODE.......2*''*SET COLORS.....4*''*SET PULSE

"SAVE/LOAD SET-UPS......

1005 PRINT #0; " "q" Returns f rom Light Show": ON ERR RESET

1010 GO SUB 8000: GO TO 1010+(99 O AND k*="1")-(1009 AND k*="0") +(1990 AND k=="2")+(2090 AND k# ="3")+(2190 AND k#="4")+(2290 A ND (k=="5" OR k=="6"))+(2990 AN D ks="7")

2000 PAPER 2: BORDER 2: CLS : RE M system set-up****** 2010 INPUT INKEYS: PRINT INVERS E 1;AT 0,9; "SYSTEM SET-UP"; INV

2020 FOR a=1 TO 5: PRINT (s\$(a) AND s(a,1))+("SETTING NOT DEFIN

ED..... AND NOT s(a,1)) ja'': NEXT a 2030 PRINT "COMPILE CURRENT SET-

UP......S"'"VIEW SET-UP....

2040 IF current THEN PRINT BRI GHT 1; OVER 1; AT current #2+3,0;

b\$ 2100 GO SUB 8000: GO TO 2100+(10 O AND (k#="s" OR k#="S"))+(200

AND (k\$>="1" AND k\$(="5"))+(300 AND (ks="v" DR ks="V"))-(1100

AND (k#="m" OR k#="M")) 2200 REM compile set-up

2210 PRINT AT 15,0; OVER 1; PAPE R 3;b\$: PRINT #0; "Set-Up # (2-5)": GO SUB 8000: IF k#(="1" OR k#>="6" THEN INPUT INKEYS: BEE P .35,10: GO TO 2010

2220 LET k=VAL k#: PRINT AT k#2+ 3,0; OVER 1; FLASH 1; bs: RESTOR E 2999: LET s(k,1)=1: FOR a=2 T O 14: READ b: LET s(k,a)=PEEK b : NEXT a

2230 INPUT "Set-Up Name? "; LINE k#: LET s\$(k)=d\$: LET s\$(k, TO (LEN k# AND LEN k#(30)+(30 AND LEN k\$>=30))=k\$ 2240 LET current=k: GO TO 2010 2300 REM make set-up current 2310 LET k=VAL INKEYS: IF s(k,1) =0 THEN PRINT AT k#2+3,0; OVER 1; FLASH 1; b#: BEEP .35,10: FO R a=1 TO 50: NEXT a: INPUT INKE Y\$: GO TO 2010 2320 RESTORE 2999: LET current=k : FOR a=2 TO 14: READ b: POKE b
, s(k,a): NEXT a: GO TO 2010 2400 REM View Set-Up 2410 ON ERR GO TO 1000: PRINT PAPER 3; OVER 1;AT 17,0;b#;#1;* View Set-Up # (1-5)*: GO SUB 80 00: IF k\$ (= "0" OR k\$)= "6" THEN INPUT INKEYS: BEEP .35,10: GO TO 2010 2420 LET k=VAL INKEYS: IF s(k,1) =O THEN PRINT AT k#2+3,01 OVER 1; FLASH 1;bs: FOR a=1 TO 100: NEXT a: BEEP .35,10: INPUT INK EY#: PRINT AT k#2+3,0; OVER 1; FLASH 0;68: GO TO 2010 2430 CLS : PRINT INVERSE 1; ss (k) | k | INVERSE 0" "MODE " | s (k, 2) " "Tone Color and Limit": PRINT PAPER O; INK s(k,7); AT 6,3; "TO NE 0 "; CHR\$ 144; " "; s(k, 3), INK s(k,8); " TONE 1 "; CHR\$ 144; " " 15(k,4);AT 7,3; INK 5(k,9); TON E 2 "; CHR\$ 144; " "; s(k,5), INK s(k,10); " TONE 3 "; CHR\$ 144; " Is(k,6): PAPER 2 2440 PRINT ''"Timing"''TAB 4;"Co urse", " Fine"' "Tempo ";s(k,11)+(256 AND s(k,11)=256); TAB 18; s(k,12)+(256 AND s(k,12)=0) "Pu "(s(k,13)+(256 AND s(k,13) =0) | TAB 18| s(k, 14) + (256 AND s(k .14)=0) 2450 PRINT #0; "Press any key to return to Menu": GO SUB 8000: G O TO 2000 2999 DATA 45351,45076,45080,4508 4,45088,45129,45117,45105,45093 ,45213,45216,45196,45199 3000 REM set mode 3005 ON ERR GO TO 1000: PAPER 3 : BORDER 3: CLS : PRINT TAB 11; INVERSE 1; "SET MODE" 3010 PRINT ''' * Mode 0 -- Tone P attern will staylit only during ON Period. "' "Mode 1 -- Tone P attern will staylit until next Tone Pulse. "' "Currently set at "; INVERSE 1; "MODE "; PEEK 4535 3020 PRINT #0; BRIGHT 1; "Enter D esired Mode (0 or 1) ..M. for Menu"; b\$(13 TO) 3030 GO SUB 8000: IF k\$ (> "O" AND k#<>"1" AND k#<>"M" AND k#<>"m * THEN GO TO 3030 3040 IF k#="1" OR k#="0" THEN P OKE 45351, VAL k#: LET current=0 : INPUT INKEY#: PRINT AT 0,0: G O TO 3010 3050 GO TO 1000 3100 REM set colors 3110 ON ERR GO TO 1000: PAPER 4 : BORDER 4: CLS : PRINT INVERS E 1;AT 0,10; "SET COLORS"'' 3120 PRINT BRIGHT 1; INK PEEK 4 5129; PAPER (4 AND PEEK 45129=0);AT 6,3; "TONE 0 ";CHR# 144;" " INK PEEK 45117; PAPER (4 AND PEEK 45117=0); TONE 1 "; CHR\$ 1 44; " (AT 7,3; INK PEEK 45105; PAPER (4 AND PEEK 45105=0); "TON

E 2 "|CHR# 144;" ", INK PEEK 45 0931 PAPER (4 AND PEEK 45093=0) " TONE 3 "|CHR# 144;" 3130 INPUT INKEY#: PRINT #0; To ne # (0-3) -- ""M"" for Menu" 3140 GO SUB 8000: IF k*<"0" OR k
>"3" AND (k<>"M" AND k*<>"m") THEN GO TO 3140 3150 IF ks="m" OR ks="M" THEN G O TO 1000 3160 LET a=VAL ks: INPUT INKEYs: PRINT #0; "New color for TONE " ik#i" (0-7) 3170 GO SUB 8000: IF k*("0" OR k \$>*7* THEN GO TO 3170 3180 POKE 45000+(129 AND a=0)+(1 17 AND a=1)+(105 AND a=2)+(93 A

ND a=3), VAL ks: LET current=0: GO TO 3120 3200 REM tone control 3210 ON ERR GO TO 1000: PAPER 5 : BORDER 5: CLS : PRINT INVERS E 1;AT 0,9; TONE CONTROL ... 3220 BRIGHT 1: PAPER O: PRINT NK PEEK 45129; AT 6,3; "TONE 0 "; CHR# 144; " ";: LET C#=STR# PEEK 45076: PRINT C\$; INK PEEK 451 17; TONE 1 "; CHR\$ 144; "; LE T CS=STRS PEEK 45080: PRINT CS; AT 7,3; INK PEEK 45105; "TONE 2 ";CHR# 144;" ";: LET c#=STR# PE EK 45084: PRINT C#, INK PEEK 45 093; * TONE 3 *; CHR* 144; * *;: L ET CS=STRS PEEK 45088: PRINT CS

3230 INPUT INKEY#: PRINT #0; " To ne # (0-3) -- ""M"" for Menu" 3240 GO SUB 8000: IF k*("0" OR k *)"3" AND (k*()"M" AND k*()"m") THEN GO TO 3240 3250 IF ks="m" OR ks="M" THEN G O TO 1000 3260 LET a=VAL k#: LET limit1=5a: LET limit2=(254 AND a=0)+(PE EK 45076-1 AND a=1)+(PEEK 45080 -1 AND a=2)+(PEEK 45084-1 AND a =3) 3265 INPUT | "New limit for TONE "+STR# a+" ("+STR# limit1+"-"+S TR# 1imit2+")? "; LINE k# 3270 LET k=VAL ks: IF kkimiti 0 R k>limit2 THEN GO TO 3265 3280 POKE 45000+(76 AND a=0)+(80 AND a=1)+(84 AND a=2)+(88 AND a=3), VAL ks: LET current=0: GO

3225 PAPER 5: BRIGHT O

TO 3220 3300 REM pulse and tempo control

3310 ON ERR GO TO 1000: LET a=V AL ks: PAPER 6+ (a=6): BORDER 6+ (a=6): CLS 3320 PRINT INVERSE 1;AT 0,9; (*P ULSE" AND a=5) + ("TEMPO" AND a=6) + " CONTROL"

3330 LET course=PEEK (45196+(17 AND a=6)): LET fine=PEEK (45199 +(17 AND a=6)): PRINT ""Curren t "+("Pulse" AND a=5)+("Tempo" AND a=6) "'TAB 4; "Course", "Fine" TAB 6; course+ (256 AND course=0):" "| TAB 17| fine+ (256 AND fi ne=0);"

3340 PRINT ''*Course -- Number o f times ""Fine" "period is repea ted"''Fine -- Sets timing via nano- seconds*

3350 PRINT AT 18,0; ("Pulse -- Le ngth of time needed to place T one pattern on screen. AND a=5)+("Tempo -- Length of pause be tweenreading Tones" AND a=6) 3360 PRINT #0; set Course or Fin e (C or F)? ""M"" for Menu" 3370 GO SUB 8000: IF k*<>*C* AND k#<>"c" AND k#<>"F" AND k#<>"f " AND k*<>"m" AND k*<>"M" THEN GO TO 3370

3380 LET i*=k*: IF i*="m" OR i*= "M" THEN GO TO 1000
3390 PRINT OVER 11 FLASH 11AT 5
.4+(12 AND is="f" OR is="F");"
"+(" " AND (i = "c" OR i = "C")): INPUT "Enter # (1-256) ";
LINE k#: LET k=VAL k#: IF k<1 0 R k>256 THEN GO TO 3390
3400 POKE 45196+(3 AND (1=="f" 0
R 19="F"))+(17 AND a=6),k-(256
AND k=256): LET current=0: GO T 0 3320
4000 REM save/load set-ups
4010 ON ERR GO TO 1000: CLS : P RINT TAB 7; INVERSE 1; SAVE/LOA
D SET-UPS"; #0; BRIGHT 1; "S = SA
VE L = LOAD M = MENU* 4020 GO SUB 8000: IF k*<>"S" AND
k#<>"s" AND k#<>"L" AND k#<>"1
" AND k#<>"M" AND k#<>"m" THEN GO TO 4020
4030 IF k#="S" OR k#="S" THEN G
0 TO 4100 4035 IF k*="M" OR k*="m" THEN G
O TO 1000
4040 PRINT "'"Ready to LOAD Set- Ups": INPUT "Load title ?";ns:
PRINT ''"Loading "in#: PRINT #0
"Start tape, then press any ke
y. ": GO SUB 8000: INPUT INKEYS 4050 IF LEN n\$>10 THEN LET n\$=n
\$(TO 10)
4060 ON ERR GO TO 4200: LOAD n\$ DATA s\$(): LOAD n\$ DATA s(): G
O TO 1000
4100 PRINT ""Ready to SAVE Set- Ups": INPUT "SAVE title ?";n*:
LET n==("Set-Ups" AND n=="")+n=
(TO LEN n#-(LEN n#-10 AND LEN n#)10)): PRINT AT 6,0; "Saving "
!u#!
A110 SAVE n# DATA s#(): SAVE n# DATA s(): PRINT #0; "Verify (Y o
r N)'?": GO SUB 8000
4120 IF ks="N" OR ks="n" THEN G
4130 INPUT INKEYS: PRINT AT 6.01
"Verifying "";ns;""""" "Rewin d tape";#0;"Start tape and pres
s any key. ": GO SUB 8000
1140 ON ERR GO TO 4200: VERIFY n# DATA s#(): VERIFY n# DATA s(
): GO TO 1000
4200 CLS : PRINT FLASH 1;AT 5,7
TAB 6; INVERSE 1; Please Attem
pt Again"; INVERSE 0;#0; "Press
any key for Menu": GO SUB 8000: GO TO 1000
8000 REM keyboard scan 8010 IF INKEY\$<>** THEN GO TO 8
010
8020 IF INKEY == " THEN GO TO 80
8030 LET k#=INKEY#: RETURN
9000 CLEAR 45055: LET as="": RES
TORE 9100: FOR 1=0 TO 36: READ d*: LET a*=a*+d*: NEXT 1
9010 IF LEN as(>592 THEN PRINT
FLASH 1; "Error in Machine Code DATA Lines 9100 - 9136"'
FLASH O; "There are too "+("few
" AND LEN a\$(592)+("many " AND LEN a\$>592)+"Data items!""
*PLEASE CORRECT BEFORE CONTINUI
NG"
9020 LET address=45056: FOR i=1 TO LEN as-1 STEP 2
9030 POKE address + INT ((1-1)/2
),(CODE a\$(1)-(48 AND CODE a\$(1)(58)-(55 AND CODE a\$(1)>64))*1
6+CODE a\$(1+1)-(48 AND CODE a\$(
i+1)(58)-(55 AND CODE a\$(i+1)>6
9040 NEXT 1
9100 DATA "3A085CFE712001C9" 9101 DATA "16FF15AFDBFECB77"
9102 DATA *20F87AFEF030E9FE*
9103 DATA *C8302CFEA0301CFE*

9104	DATA	*78300C110002ED53*
9105	DATA	*B05C21A7B0182211*
9106	DATA	*0005ED53B05C21C7*
9107	DATA	"B01816110003ED53"
9108	DATA	"B05C21E7B0180A11"
9109	DATA	*0006ED53B05C2107*
9110	DATA	"B13A27B1FE012805"
9111	DATA	"E5CD7FB0E1CD7FB0"
9112	DATA	*189E7EE638577EE6*
9113	DATA	*07070707BA2006ED*
9114	DATA	"5BB05C18053A8D5C"
9115	DATA	*77C9E6F88277C906*
9116	DATA	*105E235623E52100*
9117	DATA	*5819050601050601*
9118	DATA	*10FEC110F8C1CD62*
9119	DATA	"BOE110E5060CC506"
9120	DATA	*0010FEC110F8C90F*
9121	DATA	"0151018F014D01CF"
9122	DATA	*005301CF014B018F*
9123	DATA	*0055010F0249014F*
9124	DATA	*0057014F02470130*
9125	DATA	*0170016E012E01F2*
9126	DATA	*00B201AC01EC00B4*
9127	DATA	"00F401EA01AA0081" :
9128	DATA	*0481048104810432*
9129	DATA	*0172016C012C0114*
9130	DATA	*0194018A010A01F6*
9131	DATA	*00B601A801E80081*
9132	DATA	*048104810481044F*
F107 V T 0 V		*01F000B001AE01EE*
9134	DATA	"OOBIOOFICIEDOIAD"
9135	DATA	*00720032022C026C*
9136	DATA	*0081048104810400*
9200	RESTO	RE 9300: LET tally=0:
FOR 1	=0 TO	36: READ d: LET tall
		PRINT FLASH OF ERROR
		" in DATA Lines 9300
- 93	50***	*Please correct and <
STATE OF THE PARTY		
RUN 9	2003	! STOP
	9105 9106 9107 9108 9109 9111 9112 9113 9114 9115 9116 9117 9120 9121 9123 9124 9125 9127 9128 9129 9130 9131 9130 9131 9131 9131 9131 913	9105 DATA 9106 DATA 9107 DATA 9108 DATA 9109 DATA 9110 DATA 9111 DATA 9112 DATA 9114 DATA 9115 DATA 9115 DATA 9117 DATA 9117 DATA 9117 DATA 9119 DATA 9120 DATA 9121 DATA 9122 DATA 9122 DATA 9123 DATA 9123 DATA 9124 DATA 9125 DATA 9125 DATA 9126 DATA 9127 DATA 9128 DATA 9128 DATA 9129 DATA 9131 DATA

9230 RESTORE 9300: LET address=4 5056: FOR i=0 TO 36: LET check= O: FOR j=1 TO 8: LET check=chec k+PEEK address: LET address=add ress+1 9240 NEXT j: READ tally: IF chec k<>tally THEN PRINT FLASH 1;" ERROR"; FLASH 0;" -- in DATA"" Check for an Error in Line ";91 00+i' "And then procede by (RUN 9000>": STOP 9250 NEXT 1 9300 DATA 759,1268,1431,1036,519 ,719,825 9310 DATA 562,759,634,751,1470,1 037,489 9320 DATA 679,1254,528,521,1223, 867,943 9330 DATA 512,511,256,289,514,76 8,779 9340 DATA 453,290,546,713,482,83 1,830 9350 DATA 320,399 9400 CLS : PRINT *Machine Code h as been Loaded into memory." ""Press any key to SAVE & VERI FY Light Show 2000!": PAUSE 0 9410 INK 9: RESTORE 130: FOR a=U SR "a" TO USR "a"+7: READ y: PO KE a,y: NEXT a 9420 CLEAR : DELETE 9000,9500 9998 SAVE "1% 2000" LINE 9999: S AVE *1s 2000 CODE 45056, 296: CL S : PRINT "Rewind Tape and Play to Verify": VERIFY "": VERIFY ""CODE : GO TO 140 9999 CLEAR 45055: LOAD "1s 2000" CODE 45056,296: INK 9: RESTORE 130: FOR a=USR "a" TO USR "a"+7 : READ y: POKE a,y: NEXT a: GO TO 140

Machine Code Listing

ORIGIN BOOCh (45056d)

ADDRESS	OP CODE	LABEL	MNEMONIC	NOTES
B000	3A085C	START	LD A, (5008h)	; last key pressed
B002	FE71		CP 71h ,	;was it "q"
B005	2001		JR NZ, LISTEN	; if not continue
B007	C9		RET	return to BASIC
B008	16FF	LISTEN	LD D, FFh	;set pulse counter
BOOA	15	COUNT	DEC D	scount down
BOOB	AF		XOR A	sclear A & flags
BOOC	DBFE		IN A, (FEh)	fread ear port
BOOE	CB77		BIT 6,A	spulse detected?
B010	20F8		JR NZ, COUNT	; if so keep counting
B012	7A	READ	LD A, D	A = pulse length
B013	FEFO		CP FOh	supper limit Tone 0
B015	30E9		JR NC, START	if too high start over
B017	FEDO		CP DOh	supper limit Tone 1
B019	302C		JR NC, TONEO	
BOIB	FECO		CP COh	supper limit Tone 2
BOID	301C		JR NC, TONE1	
B01F	FEAO		CP AOh	supper limit Tone 3
B021	300C		JR NC, TONE2	
B023	110002	TONE3	LD DE. 0200h	link color for Tone 3
B026	ED53B05C		LD (5CBOh) . DE	spare byte = ink
BOZA	21A7B0		LD HL, TABLES	
BOZD	1822		JR ROUTE	
B02F	110005	TONE2	LD DE. 0500h	link color for Tone 2
B032	ED53B05C		LD (5CBOh), DE	
B036	21C7B0		LD HL. TABLE2	
B039	1816		JR ROUTE	
B03B	110003	TONE1	LD DE. 0300h	link color for Tone 1
B03E	ED53B05C		LD (5CBOh), DE	
B042	21E7B0		LD HL. TABLE1	
B045	180A		JR ROUTE	
B047	110006	TONEO	LD DE,0600h	link color for Tone O
BO4A	ED53B05C		LD (5CBOh), DE	2010: 10: 10:0
BO4E	2107B1		LD HL, TABLEO	
B051	3A27B1	ROUTE	LD A. (MODE)	;route depends on mode
B054	FE01		CP O1h	,
B056	2805		JR Z,SKIP	; if mode 1 go to skip
B058	E5		PUSH HL	save table address
B059	CD7FB0		CALL PULSE	display pattern

The USDSUP Co. presents

Plantanijajas (Sinesperajjas ispanija aspētis iš priežeks ir spēcijas iz disperancija i seintrancija pie paš



TOURIST



BANK SWITCHING IS HERE! BE READY FOR IT.

Tourist C is healty an extended bank switching disassembler and SPY program residing in BASIC. It uses machine code located above "COPYUP" in the machine stack. Printing to the 2040 is not seen as a privace of the code in the code in the code is a privace of the code. usually desirable, so a universal interface is included. When used, the appropriate kernel is loaded into the printer buffer. Because this is an "overlay" it does not intention with any usage by other banks or peripherals.

To help convince you of the great features of this program, send us no more than 60 bytes of any code you like and SASE. The Lightly Co. will return a disassembly of that code and more info about TOURIST C. How's that for bait? Try it.

The Wadaup Co. 1120 Herrifield S.E. Grand Rapids, MI 49507 Program: TOURIST C Order #: T525PY85B

Price:\$32.50 inc PaH



WINKJET 1 lets you use All the features of your OLIVETTI PR2300 ink jet printer.
PIOH2 is a MENU built universal interface.
Use your TASMAN, AERCO, or home brew parallel

physical interface.

LPRINT speaks fluent extended ASCII, and is adept at the PR2300 GRAPHICS dialect.

WCOPY dumps the screen to the printer in normal size or ZOOM. LLIST is supported in high resolution graphics using WCOPY.

WHAT YOU SEE IS WHAT YOU GET! WINDOW dumps part of the screen in variable length lines up to 110 characters per line. Its default configuration prints the lower two screen lines as 64 wide.

The WIDJUP Co. word processer/data base program TypoLot uses WINDOW to prepare ads like this and the one to the left.

For: T52068 w/OLIVETTI PR2300 printer Order #: T70INTF868

Price: \$14.95 plus \$1.50 S&H

GREAT BOOKS FOR YOUR SINCLAIR

OFFICIAL 2068 TECHNICAL MANUAL.....\$25.00 CONTROL THINGS with your Timex/Sinclair by R.L. Swarts.....\$5.00

ZX81: Programming for Real Applications by Randle Hurley.....\$6.00

Both "CONTROL THINGS" and "ZX81"......\$10.00

Build a Microcomputer - Controlled NEW! Robot by B.C. Taylor.....\$17.00

The Best of TIME DESIGNS Volume 1......\$12.00

TIME DESIGNS MAGAZINE **BACK ISSUES** \$3.00 EACH

All Volume Two issues available: Nov/Dec 85 thru Sept/Oct 86 Sorry, Volume One issues are no longer available individually.

WE PAY THE POSTAGE ON ALL ORDERS! PAYMENT: Check, Money Order

WE NOW ACCPET VISA and MASTERCARD.





Note: We must charge a small 4% additional fee for **Credit Card Orders**

TIME DESIGNS MAGAZINE COMPANY

29722 Hult Rd., Colton, OR 97O17 (5O3) 824-2658

LIGHT SHOW

program continued from page 9

BOSC	F1		POP HL	restore table address
BOZD	CD7FB0	SKIP	CALL PULSE	iremove pattern
B060	189E		JR START	iread next tone
B062	7E	SCREEN	LD A, (HL)	IA = temp. attribute
B062	E928		AND 38h	IA = paper only
B065	57		LD D.A	ID = paper
B066	7E		LD A. (HL)	IA = temp. attribute
B067	E607		AND 07h	IA = ink only
B069	07		RLCA	Imove ink attribute
BOSA	07		RLCA	; to paper position
BOSB	07		RLCA	I in A
BOSC	BA		CP D	fink = paper?
BOGD	2006		JR NZ, MSAME	if not make ink=paper
BO6F	ED5BB05C		LD DE, (5CBOh)	IDE = ink for tone #
B073	1805		JR LATTR	IDE - INK for tone #
B075	3ABD5C	MSAME	LD A, (5C8Dh)	
B078	77		LD (HL),A	A = perm. attribute
B079	C9		RET	
BO7A	E6F8	LATTR	AND FBh	IA = all but ink
BO7C	82		ADD A.D	
BOZD	77		LD (HL),A	IA + D (ink) = attr.
BO7E	C9		RET	set attribute file
BO7F	0610	PULSE	LD B, 10h	
B081	5E	PULSEA	LD E, (HL)	i# of graphics to pulse
B082	23		INC HL	load DE with the off-
B083	56		LD D. (HL)	set of location in
B084	23		INC HL	I attribute file
B085	E5		PUSH HL	save next table entry
B086	210058		LD HL, 5800h	istart of attr. file
B089	19		ADD HL, DE	HL = location
BOSA	C5		PUSH BC	save count
BOSB	0601		LD B,O1h	spulse time - course
BOBD	C5	BLOOP	PUSH BC	Isave course count
BOSE	0601		LD B,Oih	ipulse time - fine
B090	10FE	LLOOP	DJNZ LLOOP	Ipause fine times
B092	C1		POP BC	iretreive course count
B093	10F8		DJNZ BLOOP	Ipause course times
B095	C1		POP BC	Iretreive count
B096	CD62B0		CALL SCREEN	Traciate Counc
B099	E1		POP HL	pretreive table entry
B09A	10E5		DJNZ PULSEA	Ifinish pattern
BO9C	060A		LD B, OAh	tempo time - course
BO9E	C5	BLOOP2	PUSH BC	save course count
BO9F	0600		LD B, OOh	
BOA1	10FE	LL00P2	DJNZ LLOOP2	Ipause fine times
BOA3	C1		POP BC	iretreive course count
BOA4	10F8		DJNZ BLOOP2	Ipause course times
BOA6	C9		RET	Ipattern done
BOA7	- BOC6	TABLES		contains offset point-
				ing to addresses in
				I attribute file of
-	The section will be a section of the			graphics for tone 3
BOC7	- BOE6	TABLE2		Isame as above but for
				1 tone 2
BOE7	- B106	TABLE1		Isame as above but for
				i tone 1
B107	- B126	TABLEO		same as above but for
				I tone O
B127	01	MODE	DEFB OIh	Ivariable for mode
				The state of the s

As only the pattern for Tone 3 has 16 graphic locations, dummy locations have been provided in the other tables to bring their total up to 16. This offset + start of attribute file points to the Printer Buffer. The reason for maintaining a count of 16 for all Tones was to produce a simpler code and to similar timing for displaying all tones.

Lemke |Software |Devetopment|

Presents

Colossus

Scrolling Banner Program



a It's It's Ociri! Boy!TO

COLOSSUS is a graphics-banner program. Now you can mix banner-size TEXT with banner-size graphic PICTURES. Route your graphic banner to the 2040 thermal printer or a full size printer (you must supply your own customized Zprint-80 printer driver code.)

Specifications:

Banner size: 24 rows x 1024 continuous columns (32 screens long!)

Font Types: Standard Modern, Italics, Bold, Load Font (Chancery included)

Font Size: 8 x, 16 x, and 24 x normal

Functions: Scroll Forward / Backward Insert/Delete Columns Insert/Delete Rows Copy/Erase Segment Load/Save Banner Data 32 Screen, Low Res Animation

Output: 2040 Printer

Full Size Printer (Z-Print 80 printer driver required!) (Print from any column!)

Get your copy of Colossus (only \$19.95 ppd!) from:

Lemke Software Development 2144 White Oak Wichita, KS 67207

DON'T MISS OUR GIANT ANNIVERSARY ISSUE NOV/DEC 86



TIME DESIGNS MAGAZINE

\$15 year SIX ISSUES

(check one)

NEW SUBSCRIBER RENEWAL

Your expiration date can be found on the shipping label. EXAMPLE: Sep/86 = September/October 1986--your last issue. We also send one renewal notice just in case you forget to do so. Keep TDM coming to your door!

Send Check or M/O To: TIME DESIGNS MAGAZINE CO. 29722 Hult Rd _ Colton, OR 97017

lame	please prin

Address

City

State

Zip

FALL PRODUCT ROUND-UP

SOFTWARE

PIXEL SKETCH And GRAPHICS EDITOR Version 2.0

Reviewed by Duncan Teague

What if Michelangelo and Leonardo da Vinci had owned some good graphics software? Would they have utilized a computer for their creative efforts? Would the Sistine Chapel be covered with fanfold paper? Would the Mona Lisa be stored as electrons on a disk instead of pigment on a canvas?

Those gentlemen were the masters of their media. Unless you have a comparable skill with pallette and paint brush, maybe you'd better rely on joystick and keyboard. PIXEL SKETCH And GRAPHICS EDITOR Version 2.0

employs both.

PS/GE lets you create, edit, and label original graphics and modify, merge, and analyze existing screens with electronic tools. Some of the editing functions on PS/GE are found in Apple graphics software like Mouse Paint and Dazzle Draw. PS/GE even provides some func-

tions the 128K Dazzle Draw doesn't include.

PS/GE operates in three somewhat compatible modes: standard color, extended color, and high resolution. Mode can be selected once the program has loaded. The standard color and extended color modes can be electronically switched at will while you're working with PS/GE. The high resolution mode must be maintained once it is selected.

In the standard color mode, one ink color and one paper color are allowed in each 8 pixel by 8 pixel character position. The brightness and flashing attri-

butes may be on or off.

In the extended color mode, PS/GE creates eight "elements" within each character position. Each element is 1 pixel high by 8 pixels wide. One ink and one paper color and one bright and one flash attribute are permitted in each of these elements.

One screen character could thus be printed with 8 ink and 8 paper colors with alternating bright and/or flashing horizontal elements. In this mode it's possible to create new colors on the screen by juxtaposing the appropriate ink and paper colors. The manual suggests

using red ink on green paper to make brown.

The high resolution mode amazes me. Although the hardware limits you to one ink and one paper color on the screen at any time, the software extracts the finest detail possible from the T/S 2068: 512 pixel horizontal resolution. All three modes offer the standard 176 pixel vertical resolution.

The incompatibility between modes is seen in the input and output routines. A standard mode picture is saved or laoaded as a standard SCREEN\$: 6912 bytes at address 16384. An extended color graphic is saved or loaded as two files, each having 6912 bytes. One file at 16384 holds ink (pixel) and paper (no pixel) data. A second file at 24576 stores extended color and attribute data.

A high resolution display also saves or loads as two files. They extend the identical length and reside at the same starting addresses as an extended color screen. The first records the odd number column data; the second, the even number column data. The program tape includes a utility, PS/GE-32/64, which will convert one or two standard mode screens into a high resolution screen. (The listing for this utility appears in the March/April 86 TDM.)

If you've ever used MacPaint or a MacIntosh or Mouse Paint on an Apple II, you'll be right at home with PS/GE. Although the former programs employ a mouse for input instead of a joystick, they offer nearly the same

drawing, text, and editing functions.

The drawing functions of PS/GE are as follows:



PS/GE 2.0
employs 2
different
character
fonts:
Standard &
Chancery,
and Uses 3
modifiers:
Bold Bold
Modern
and
Italics
FINITES
INVERSES!

Mona Lisa courtesy of "Art For All Ages" by R. Conlon for Games to Learn By. I loaded the screen, mirror imaged half, block-copied, and block-erased. Then I added the text balloon.

Plot and Erase (free hand sketching and erasing);
 Draw (disconnected) and Connect (-ed straight lines);
 Circles; 4. Draw Arcs; 5. Fill/Shade (with textured)

patterns); 6. Paint (with solid colors); 7. Text (label-

ing)

The ink and paper color and the flash and bright attributes can be changed at will. Cursor speed can be adjusted from moving one pixel at at time to four times that rate. Cursor speed could be further changed by altering the program listing.

The plot (sketch) command is controlled by the fire button on the joystick. The joystick is also used to select other functions from a menu screen accessed by pressing the ENTER key. Keyboard commands can also change the cursor speed and activate the erase function

without having to leave the drawing screen.


Two status lines at the bottom of the screen provide a constant readout of the cursor's position, wether the plot and/or erase functions are in use. The cursor's coordinates are important to know. Most of PS/GE's editing functions operate optimally only when the edges of drawn figures coincide with the normal character position boundaries. I'll explain later.

The text you use to label your creation can be the ordinary system font, or you may load an additional font from the program tape. The extra font is called "Chancery". It looks like it flows from a calligrapher's pen. You can alter either font from the menu. You may choose bold, modern, and italic versions of either the system font or the Chancery font at any time.

The editing functions of PS/GE are operated within an adjustable, but not elastic, window. PS/GE's window moves 8 pixels at a time. Window boundaries are always aligned with the edges of the normal screen character rows and columns. If a portion of an area to be edited extends beyond a normal character row or column, the editing window must be large enough to extend to the next row or column boundary.

Here is a list of PS/GE's window editing functions: 1. Block Copy (cut and paste); 2. Block Erase; 3. Block Rotate (90 degrees clockwise); 4. Mirror Image (horizontal only); 5. Inverse (exchange ink/paper); 6. Wide View (shrink); 7. Zoom (enlarge); 8. Digitize (analyze like a UDG-help create sprites?!);

9. Merge (a portion of one screen with another).



The butterfly is my own drawing using PS/GE. I created the left side, filled and painted, and

then mirror imaged it. Then I added the text.

When you select any of these functions from the menu, a window appears on the drawing screen. The window's size can be adjusted in one dimension at a time by using the unshifted arrow keys. The "S" and "L" keys

height and width simultaneously. The joystick places the window in the appropriate position.

After using any of the editing functions, you'll have a chance to reconsider. A "SAVE?" prompt will appear, and you may "undo" the last procedure by responding with any key except "Y". The drawing functions, except Plot, Erase, and Text, can also be undone.

will make the window smaller or larger by changing its

Hard copy can be obtained of any screen in any mode. Only the ink/paper pattern is reproduced. Colors are not represented by different dot patterns as in Tascopy or Z-Print 80. The screen can be printed on the 2040 printer or in small and large sizes on 80-column printers.

If you want to use an 80 column printer, you'll become more familiar with your printer's manual than you used to be. You'll need to know how to adjust the line feed pitch and how to send the appropriate commands for bit graphics.

My printer has to know how may bytes will follow the bit graphic command. The correct number for my C. Itoh 8510 is 256 in the standard color mode, and 512 in the high resolution mode. Those numbers had to be doubled for the large printout.

To make the large printout of a high resolution mode screen (1024 bytes per line), fit on my printer paper, I had to set the printer's DIP switches for pro-

portional characters. This gives a print density of 1280 dots per 8-inch line, slightly more than required for this mode.

If your bit graphics mode prints each line upside down, as mine did, there's a simple solution. Alter the programs's machine code with the following POKE's, which are courtesy of program developer Stan Lemke:

AERCO FD-68 owners will easily be able to convert PS/GE to disk. The utility for converting standard screens into high resolution screens is another matter. PS/GE-32/64 uses OUT 255,0 and OUT 255,54 to alternate between 32 and 64 column modes. The FD-68's OUT 244,1 command interferes. Disk access must be switched off with OUT 244,0 before performing the conversion process. Loading two screens is much more difficult. I used short machine code routines to store one at 40000 and then recall it for conversion.

I really enjoyed using PS/GE. Cursor movement is slow, especially across the 512 pixel-wide high res screen, but the sophisticated editing functions surpass those of any other T/S 2068 graphics program I own. The functions for creating and editing screen segments, merging one screen with another, converting standard mode screens to high resolution screen, and printing out with excellent dot density exceed my present ability to exploit them. But I'm learning. My joystick finally has something to do besides play games.

PIXEL SKETCH And GRAPHICS EDITOR Version 2.0 is available from Lemke Software Development, 2144 White Oak, Wichita, KS 67207. The T/S 2068 program comes on a cassette with users manual for \$19.95 ppd. A joystick

is required.

TIMACHINE — A BASIC Compiler

Reviewed by Michael E. Carver

Deja vu! That was my first thought upon opening the large envelope from editor Tim Woods. Let's take a trip via H.G. Well's time machine by setting the controls to travel back in time one year. Exactly one year ago, I was asked to review a BASIC compiler for the T/S 2068 called ZIP (Sept/Oct '85 issue of TDM). Back to the present! I now have the task of reviewing a new BASIC compiler for both the 2068 and Spectrum (two different versions on the same tape). It's called TIMACHINE.

First, a short review. BASIC is the resident ROM language in the Sinclair machines. BASIC is a language we humans can easily use to make the computer and its processor perform a desired task, and is a fairly effortless language to learn and use. It is also a fairly forgiving language, especially with the help of Sinclair syntax and error checking. The trade-off for this simplicity is a lack of speed and flexibility. The actual resident language of the Z8OA CPU (the main brain of the Sinclair machines) is machine code, also known as assembly language. This "language" is composed of about 50 different instructions, though most have many vari-

ations. The advantages of machine code include fast execution, efficient use of memory, and freedom from the dictates of the Operating System. The other side of this coin are the following disadvantages: programs are hard to understand and follow, a simple manipulation of data may involve many complicated steps, real-number calculations can be difficult and it can be very unforgiving. Programming in machine code can involve extensive study of the machine, books and tables, developing tools (assemblers and monitors), and, of course, patience.

Enter the BASIC compiler, which attempts to marry the advantages of both BASIC and machine code, while trying to avoid their drawbacks. TIMACHINE is the best compiler I have seen to date for the Sinclair Z80 machines. Timachine will compile virtually all of the Sinclair BASIC commands into a much speedier program. This compiler is quite different from others I have seen in both speed and versatility. Where many compilers only allow the use of integers (whole numbers from -32768 to 32767 or 0 to 65535), Timachine will allow the use of real numbers (decimals and numbers far larger or smaller

13

Now at last . . .

The FootePrint Printer Interface

The FootePrint Printer Interface was originally described in the January-March 1985 issues of SUM Magazine. Now improved and professionally built, it is available direct from the designer! FootePrint plugs into the cartridge slot of the TS-2068 and works with both Tasman (B and C) and Aerco print driver software. Just load the software and print. No POKES required. No modifications.

- for Centronics parallel printers
- works in both 2068 and Spectrum mode
- compatible with OS-64 & Spectrum emulators
- · EPROM socket and on/off switch on board
- requires no modifications to computer

- plugs into cartridge dock—door completely closes with cable running back under computer
- frees up rear edge connector allowing other peripherals to be used; less chance of a crash
- print driver software for LPRINT, LLIST, and COPY included for 2068 and Spectrum modes

FootePrint Interface w/software & cable	\$4500 postpaid
FootePrint with OS-64 option included	\$6500 postpaid
Bare board & instructions only	\$1500 postpaid
Cable only for use with bare board	\$1500 postpaid

All prices are pre-paid and include shipping charges. Florida residents must add 5% state sales tax.

FOOTE 🛳 SOFTWARE

P. O. Box 14655 — Gainesville, FL 32604 904/462-1086 (6 pm · 9 pm EDT)


DUNGEON A MULTI-LEVEL MAZE ADVENTURE GAME by Fred Nachbaur (C)1986

FOR THE TIMEX TS1500


FINALLY! A FULL-FEATURE, HIGH RESOLUTION DUNGEON GAME FOR THE TS1500!

This 24K game, written entirely in machine-code, is the most spectacular program ever written for the TS1500. Nine levels, 16 types of monsters, 14 objects, spells. Easy to play, difficult to master. Includes FAST-SAVE with auto-boot to save in-progress games: time to load entire program reduced to 70 seconds! Revolutionary TRUE HI-RES puts your TS1500 on a par with much larger machines.

Send \$24.95 (cheque or MO) to FRED NACHBAUR, C-12 MTN. STN. GROUP BOX, NELSON BC V1L 5P1 CANADA. Specify version: V1 (TS1500 + 8K Hunter NVM or equivalent) or V2 (TS1500 + 16K RAM pack). V2 requires a minor hardware addition (included). COMING SOON: V3 for ZX81/TS1000. Inquire. *** ALSO AVAILABLE: TS1500 HI*RES EXTENDED BASIC (\$16.95)

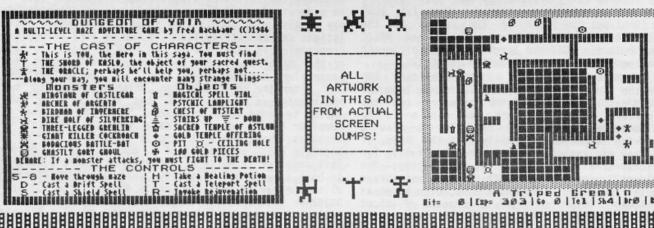



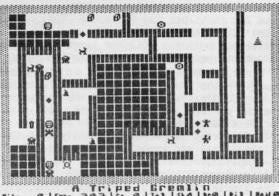

100日日中日

than 16-bit numbers). There are also floating-point (or real number) compilers available for the Spectrum, but unlike Timachine, can not compile both integers and real numbers, and run only 3 to 5 times faster. Timachine allows the user to specify which numbers are to be real or integers, thus greatly speeding

up performance when doing integer mathematics.


Unlike other compilers, Timachine also allows string arrays and defined functions and 2-dimensioned arrays, along with many other commonly used BASIC commands. Because it allows floatingpoint mathematics, one can also compile trigonometry functions (TAN, COS, ACS, SIN, ect.). In fact, according to the manual, Timachine will support all but the following BASIC commands: CLEAR, CONTINUE, ERASE, FORMAT, LIST, LLIST, LOAD, MERGE, MOVE, NEW, RESET, RUN, SAVE, VERIFY, FREE, ON ERR, and VAL\$. A few other commands may have some limitations connected with them. (e.g.; RESTORE, GOTO, and GOSUB must be followed with a valid line number and not an expression or variable; an array can only be dimensioned to one set length; a defined string variable may not be later dimensioned; VAL A\$ is not supported.)

Speaking of the manual, I must compliment Novelsoft and Cameron Hayne (the author of the manual and program) for providing an extensive and easy-to-follow manual. The manual contains 52 pages of excellent step-by-step tutorials (sample programs included on tape), thorough explanations of commands and directives (even explaining how to obtain certain Sinclair Keywords), detailed notes on how the compiled code handles certain BASIC instructions, clear and helpful hints, definitions of Error Messages, a list of helpful POKEs, a memory map, and a

list of the runtime routines.

Timachine is loaded into the memory location normally served for BASIC (right after the system variables) with the normal 2068/Spectrum memory map shifted upwards to allow for BASIC programs. There is approximately 27k available for a BASIC program (30k on the Spectrum). Once loaded into the computer, Timachine is completely transparent. One can LOAD or type in a BASIC program and RUN it as if Timachine was not in memory. Timachine is accessed through direct commands prefaced by an asterisk, "*" (e.g.; [*] will compile a BASIC program). In fact, the only time Timachine makes itself apparent (except for less available memory) is when the trace (an interrupt-driven program) is on. While running a BASIC program, the trace will log

2068 KEYBOARD OVERLAYS

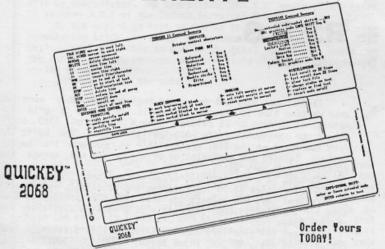

Put commands at your fingertips! Durable glossy, smudge free plastic stock cut to fit your keyboard.

Available for: TASWORD/TASPRINT, MSCRIPT, rev. MSCRIPT U. 5.0, OMNICALC II, FIGHTER PILOT, KEY IDENTIFIER, and a BLANK overlay to customize your special software.

Only \$5.95 each, including postage & handling.

Send check or Money Order to:

AH-TO PRODUCTIONS 9009 W. Elm Street.#2 Phoenix, Arizona 85037

and type the program variables every 1/60th of a second (1/50th on the Spectrum) and provide a listing of the variables with their type (i.e.; real, integer or positive integer) and length of string variables. This is a very helpful tool. There is a limit of 255 simple numeric variables, whose name can be any length and the standard number of string variables.

Directives to the compiler (instructions) are included in the actual BASIC program in REM statements with an exclamation point. "!", following the REM (e.g.; 10 REM ! OPEN # will start compiling at this point). Some of these directives are instructions on where to halt or re-start compiling (allowing access to BASIC or ones own machine code routines), maximum length alloted to a string variable, and setting types of numeric variables (i.e.; real, integer, ect.). One can direct a listing of the addresses for the runtime routines and the machine code variables used by the compiled program. Also, a listing of the execution addresses for individual compiled BASIC lines can be obtained. Once can specify the address at which the compiled code will reside, giving flexibility in locating ones own

machine code or BASIC routines.

Learning to use Timachine is simple, but practice and study is needed if one plans to master its uses. Simple BASIC programs are easily compiled into fast-running programs. An understanding of real numbers and integers is needed to obtain maximum and exact results. When real numbers interact with integers, interesting, but usually unintended, results can occur. While testing Timachine, I used various BASIC programs I had already developed and debugged. During the first pass, Timachine checks the BASIC for any unsupported BASIC commands and provides clear Error Messages displaying the offending BASIC line, usually with a flashing "?" cursor marking the part in question. The next pass is a dry run to fix the amount of memory needed for the final version and check for destination addresses for GOTO, SUB, ect. commands. The last pass is the actual creation of the machine code. The user is provided with information on the length of the compiled code, amount of memory allocated for variables, length of the BASIC program, and instructions on how to SAVE, LOAD and run the compiled code. This complete compilation process is quite speedy. Timachine compiled the program included with the ZIP compiler in 9 seconds compared to the 31 minutes taken by ZIP (see Sept/Oct '85 TDM, pp. 18-19). I was able to compile most of my test programs satisfactorily, with only minor modifications to the BASIC. However, the one larger and complicated of the BASIC programs proved to be too convoluted to simply modify. I did not have time to fully test this program, but feel it would require a major reworking to obtain proper results via Timachine. If the program had originally been written with Timachine in mind, I see no reason it could not be easily compiled.

As the compiled code is in machine code, it can be unforgiving and provide undesired results. In BASIC, "PRINT H\$ (X)" will print H\$(1) if x=.5, where the compiled version will attempt to print H\$(0). Another problem I encountered dealt with FOR/NEXT loops. In BASIC, one can leave a FOR/NEXT loop, jump into the middle of another FOR/NEXT loop using the same variable and upon execution of NEXT (X), resume operation at the start of the second loop. However, in machine code the continuation is at the start of the first loop. There are many runtimes (machine code routines used by the compiled version to execute selected operations) which use extensive ROM routines. This allows for simple conversion and efficient use of memory, but can slow down performance. When these runtimes are used, the improvement in speed is slight, (e.g.; CIRCLE, DRAW, COS, ect.). It is up to the user to develop a BASIC program that will utilize a more efficient compiled version. This will come with practice and experience, though knowledge of machine code will be helpful. One can use Timachine as a tutor on how to write their own machine

code utilizing ROM resident routines. Timachine is the most comprehensive, flexible compiler I have seen for the Spectrum or TS 2068. It is always a pleasure to encounter a program of this class, and I must applaud Cameron Hayne for obtaining so much from our humble Sinclairs. Depending on the programming skills of the user, one can compile fast and efficient machine code programs, though not necessarily using less memory. It is a program that will allow the novice BASIC programmer some degree of success, while allowing the more ex-perienced programmer greater flexibility. One should not expect to produce amazingly impossible feats from this product, as these usually come from direct manipulation of the processor via ones own machine code. One will be able to produce effects that are available in BASIC, but a speeds that will greatly enhance them. In last year's review of ZIP, I stated that one should choose a compiler based on its limitations. Well, Timachine has few limitations and is a quick and comfortable program to use. Will this be the "last word" in compilers? I don't know. Let's set our "time machine" for one year into the future...

TIMACHINE is available for \$19.95 + \$3.00 S&H (U.S.) from Novelsoft, 106 Seventh Street, Toronto, Ontario, Canada M8V 3B4.

416/259-8682.

LARKEN TS1000 Disk Drive Interface

Reviewed by Sean Wenzel

I am sure all of you have thought about the speed and reliability that a disk drive can offer, but it just cost too darn much or the reviews said it wasn't much of a DOS, it was more like a "semi-dos" (in lower case), and you had to be an elec-tronics engineer to put the thing together, ect...that is why you didn't go ahead and get one.

Well there is no excuse now, because Larry Kenny of Larken Electronics has come out with a disk drive interface which is not only inexpensive, but also has a real live DOS!

O.K., so you order the drive interface...what do you get? I ordered one, and when I found it at my door, I quickly ran inside and carefully opened the package wrapped in cardboard and discovered a circuit board about 3x6 inches, a power connector for the disk drive, a disk, a ribbon cable for connection to the ZX81 and one for the drive, and a manual. I opened up the manual and found out that I now needed to buy a power supply and a double sided IBM compatible disk drive. The power supply must provide 5 volts and 12 volts each, at a couple of amps. The drive and power supply are easily obtained at almost any computer store. When I got the drive and power supply, I hooked them up according to the diagrams in the manual and powered up the computer and watched for smoke...there was none! Then I did a RAND USR 14336, then LDOS* appeared on the screen, and I formatted a disk by typing FORMAT, and the drive whirred and "clunked" and completed the format successfully. I then sat down and read the manual and found out that LARKEN DOS is extremely flexible and easily lends itself to modification by the beginner who uses BASIC, through to the advanced machine code hacker. All of the locations and a brief description of useful routines in the 2k DOS EPROM are given in the manual. If you wish to convert an auto-run BASIC program, you can just load it normally and break into it (or if it is un-breakable, use RAND USR 837 -- auto break on load), and where the save line is, just put RAND USR 14336 followed by a REM statement containing the command (e.g.; REM SAVE "NAME.Bl"), then GOTO the USR 14336 line and the program will auto-save and run.


You can have up to 52 files per disk and the maximum file size is 47040 bytes. There are 6 commands available on the 2k EPROM. LOAD, SAVE, DIRECTORY, FORMAT, EXIT, and DELETE. Other commands which are actually basic programs, are provided on the supplied disk. There are things such as a "badblock scanner", and a 2 drive copy program, for copying drive 1 to drive 2.

The documentation provided is short, sweet, and as complete as you could want. If you have any problems with anything, you can call Larry Kenny (Larken Electronics)...he is extremely

friendly, and glad to help.

In my opinion, the LARKEN DISK DRIVE INTERFACE has got to be the most useful extension that I have made to my ZX81. The money it cost, is nothing compared to the joy of getting rid of the frustration of knocking over stacks of tapes on your desk, or losing that program you just spent the last 3 hours typing in (and didn't backup, because of the "5 minute save").

The Larken Disk Drive Interface is available from Larken Electronics, RR#2, Navan, Ontario, Canada K4B 1H9. Phone: 613/835-2680. Price is \$99.00 (U.S.). Add \$5 for 2-drive version (an upgrade is available for \$10, if you change your mind later).

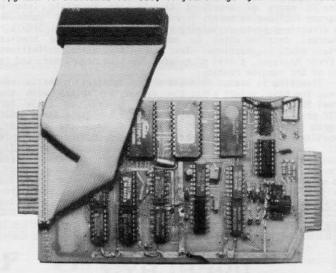

ZX-CALC + R.F.R.G.

Reviewed by D. Hutchinson

ZX-CALC + R.F.R.G., is a complex and comprehensive spreadsheet/accounting package. It is in this reviewer's opinion, that the programmer has made an "all-out" and honest attempt to surpass the features and flexiblities of another spreadsheet; VU-CALC from Timex. Vu-Calc has been around for sometime, and it is lacking in a number of spreadsheet functions that the professional packages offer. ZX-CALC comes as close as possible to a professional package.

The R.F.R.G. part is a supplement to ZX-CALC called an "accounting model" (R.F.R.G. stands for Rodriguez Financial Report Generator). The author states that it is used primarily for sole proprietorships who do not have the company's assests tied up in land. R.F.R.G. sets up several templates and "worksheets" for various calculations. I found this section very useful in analysis of a companies financial picture using information supplied by financial

formation supplied by financial reporting. It should be noted up front, to prospective buyers of this spreadsheet package, that it does soak up memory...a lot of memory. In fact a 64k Ram Pack is a must. Also, printing is done on the 2040 printer. Be prepared to have a lot of rolls of the "shiny" stuff around, because if you're going to really get into

this program, your 2040 will be working overtime.

Perhaps the biggest drawback of ZX-CALC, is the printing feature. A spreadsheet consists of several columns and rows across a page (ZX-CALC has a maximum of 15 columns across). When hard-copy is done on the 2040, one would have to physically glue the strips all together to compare the full report. This is an inconvenience and would never do for professional copy. My suggestion would be to add the facilities for the use of fullsize printers. The Memotech and Aerco interfaces are the most popular for the ZX/TS computers, and print drivers for these would make this already great program, a fantastic one!

ZX-CALC has many sub-menus and features (probably more than we have time to describe them all). There is a grid (or matrix) of 30 rows by 15 columns, with a total of 3360 characters per spreadsheet/file (420 "cells" total). The built in math functions of the ZX81 are availble to perform the calculations. Editing and manipulation of the cursor and across the spreadsheet is very slick.

ZX-CALC is a very sophisticated spreadsheet, and at the \$16.95 price (plus \$3.00 for shipping and handling), it presents an excellent buy, and perhaps the most flexible spreadsheet I've seen for the ZX81/TS1000. There is also a version available for

the T/S 2068.

You can get your very own copy from: A.F.R. Software, 1605 Pennsylvania Ave., No.204, Miami Beach, FL 33139. 305/531-6464.



"More About...The Mystery of the Missing 253"

by Wes Brzozowski

THE GREETINGS

Welcome back to another episode, as we try to unravel a few more clues about the Extended Bank Switching for the Timex Sinclair 2068. This time, we'll be getting heavily involved in how the bank switching hardware would have worked, making this installment the most complicated of the series. But this article will cover a lot of subjects, and if one item seems hazy, skip it and move on to the next. With some rereading, things WILL get clearer, so don't get discouraged. And don't forget that the order that's easiest for YOU to learn these things, may be different from that of others. Keep rereading, and learn in your own way.

Since this kind of information hasn't been published elsewhere, I've had to invent my own notation for a lot of things. These were covered in Part 1, but if you've missed it, you can still get the back issue--July/August 1986 for \$3.00 from TIME

DESIGNS MAGAZINE.

This paragraph is for those who may have written or called me with information/advice/questions. If it appears that I'm ignoring you in this column, I must beg you to remain patient. Most of this second installment will have been written before Part 1 has even been put into print (publication delays, you know). As such, there's a good chance you'll have "missed" being mentioned in this installment. But rest assured that I do appreciate your interest, and WILL get to you in Part 3.

Some of you who've been looking up my page references for the TS2068 Technical Manual have probably been a bit befuddled. If you bought your manual from Timex, everything will be fine. However, the new version from TDM has the pages re-numbered a bit, and the page numbers I gave last time won't quite match up. I wasn't aware of this when I wrote Part 1, and will give the section numbers instead, from now on. I hope no one was inconvenienced by this. In order to accomodate everyone, let's define yet another notation. From here on, Technical Manual references will be abbreviated. The expression "TM3.3.2" would then refer to section 3.3.2 of the TS2068 Technical Manual.

By the way, I do hope no one is grumbling because of the renumbering trick. In doing this, our good friends at Time Designs have been able to reduce the total number of pages in the manual, and so perhaps they can avoid actually losing money

on the venture.

And now, on to the good stuff!

A (NOT SO) QUICK DESCRIPTION OF THE RAM RESIDENT CODE

Let's first turn to page 255 of the User's Manual that came with your TS2068. The memory layout shows two blocks called the Utility Function Dispatcher, and the Bank Switching Code. originally come out of the EXROM, and are copied to RAM of the computer's power-on initialization. The two memory maps on page 254 refer to these as "RAM Resident Code", and show that they may reside in two possible memory locations. To make this easier, the EXROM contains a routine that can relocate the code for us. Well, almost. The "relocator" fouls up on a couple of routines when it moves them to high memory. We'll discuss how to fix these in a future installment. Nevertheless, a short look at them now will make other things easier for us to understand.

The function dispatcher is a prime example of the right pew in the wrong church. In most computers, CALLing ROM routines directly through their memory addresses is considered about as civilized as blowing one's nose on the tablecloth. This is because later ROM versions may change the locations of the subroutines, rendering your programs unworkable. This was precisely what happened when Sinclair changed the ROM on the early ZX81s.

(If you remember this, you're a true "old timer".)

The "proper" way to get at ROM routines is to pass up your CALLs through an "Operating System" that can find the routines, no matter what ROM version is in place. This wouldn't give you access to all of the ROM, however, and so requires an extra

measure of programming discipline.

Is it worth it? Only when handled properly and consistently. A very similar kind of discipline allows many programs



that run on a "plain vanilla" IBM PC to also run on the PC jr, and the PC-AT, which are all radically different from one another, from their disk systems, right down to their ROMs. It also allows the programs to run on the "PC Clones", that have VERY different ROMs in them. While this programming discipline

means a bit more work, it has great advantages.

The TS2068 Function Dispatcher is a scaled down attempt to mimic this portion of an operating system. As mentioned last time, it's likely that at least someone at Timex hoped to rewrite the ROMs. The Function Dispatcher may have been a insure software compatability. By sending a "function number" to the dispatcher, the proper routine can be accessed. It also contains presently unused abilities to pass and receive data from the routines it controls. Those future ROMs may well have tapped this ability. Note that TM3.3.2 contains a reference to "the original TS2068" (as it describes OUR machines). Follow-on machines were certainly planned.

But we Timex enthusiasts, ever the unruly lot, totally ignored the Function Dispatcher, happily CALLing anywhere we liked. While the Function Dispatcher might make it easier to get at the ROM if we were running in one of the (presently nonexistent) expansion banks, it's otherwise fairly useless.

We would only use the Function Dispatcher to protect our programs against ROM address changes. But instead, no one uses it, and no one is protected. Therefore, no one will market a ROM or EPROM with address changes, because precious little software will run on it. And therefore, we needn't worry about ROM changes, and can CALL the ROM to our heart's content. It was a noble thought, Timex, but it was a bit like trying to domesticate a mongoose.

The block called the Function Dispatcher also contains some code that allows the maskable interrupt to work properly when the EXROM is switched in. It will also work with expansion banks, if they have a copy of the code at X0038 at their own location 0038. (The initialization code was supposed to copy this code into RAM expansion banks--unfortunately, it misses a byte, and anyway errantly tries to copy from the RAM bank to the EXROM; a truly useless exercise.) The interrupt code makes considerable use of the rest of the RAM Resident Code to manage

the necessary bank switching.

Following this, almost as an afterthought, is a copy of the NMI handler at Home ROM location 0066. This inclusion is somewhat perplexing, as the Home ROM already has it, doesn't link to it, it's short enough to be easily included in any expansion bank, and it doesn't work, anyway. The widely publicized NMI bug, first seen in the Spectrum and perpetuated in the TS2068 Home ROM has been faithfully copied here. There may be some subtle reason for the NMI handler to be it's more likely that a Timex programmer, feeling the pressure of overdue schedules, included it without actually understanding it. At best, it reserves space for some proper code to be put later, but to us it's fourteen orphan bytes of code that are NEVER used.

Following the Function Dispatcher is the Bank Switching Code, which will be quite useful in this series. This code is a bare-bones memory manager which, with a little bit of extra flesh (and a lot of debugging), would shield us from the "hardware realities" of bank switching. While it's fairly easy to write our own machine code to switch the standard banks, expansion banks are another thing altogether. But by always using the Bank Switching Code, we should never have been able to tell the difference. The code contains portions to do standard bank switching, portions to access the expansion hardware, and enough "smarts" to know when to do either. As such, bank switching is changed from an occasional migrane to a constant minor irritation.

Ironically, it would be better to describe the "useful

stuff" next time, when we'll be concentrating almost completely on the system software. But as a quick description, the code allows us to switch banks, move bytes between banks, find out which banks own which chunks, do the equivalent of CALL and JP functions to other banks, and other necessary niceties. Flow-chart 2 (which we'll discuss next time), shows how the BANK ENABLE routine works. This does the actual bank switching for both standard and expansion banks, and after we've seen how the hardware would probably have worked, you can check the flowchart for an example of how the hardware and software mesh together.

As has been said, this code could have resided at two different locations. Normally, it starts at location 6200, but it can be relocated to F9CO. There are several reasons for this.

If we want to add code into the RAM, there are two basic places to put it and not interfere with a BASIC program being entered. One is above RAMTOP. This is so easy to do that it's the location of choice for most T/S programmers. Yet, it's almost as easy to clear a convenient memory nook down BELOW the BASIC program in memory. The RAM Resident Code can do either.

Now, the Spectrum has no RAM Resident Code, lots of programs for the Spectrum reside above RAMTOP, and the folks at Timex made a reasonable effort to convert Spectrum programs for the TS2068. (Almost ALL programs Timex released were first sold for the Spectrum.) As such, the low memory spot is preferable, as it avoids memory conflicts. This is, in fact, where we

usually find the code.

Unfortunately, the convenient low memory area is right in the middle of the space used by the second display file for the extended display modes. There are hardware reasons for this. Some of these allow both display files to reside in just two memory chips, which must be faster (and hence, more expensive) than the rest. Also, the exact location of the second display file should have allowed them to employ some little used properties of dynamic RAMs to squeeze some extra speed out of them, when reading them for display data. Therefore, when the second display file is being used, the code is moved to the less preferable (from the designer's viewpoint) location above RAMTOP.

By the way, when you're switching chunks in and out, it's always necessary to have at least one RAM chunk available, to hold the machine stack. It's needed, among other things, to make CALL and RET commands work, and they work so well that we often forget about the stack altogether. The good folks at Timex sought to help us out in this regard, by moving the stack along with the RAM Resident Code. Since this code must be available,

ST CLASS MAGAZINE



At last a computer magazine on cassette for the TS2068. No longer will you have to type in long fastidious programs, just load and run!

BYTE POWER is the ultimate magazine for the TS2068. Each cassette is full of programs, a real TS2068 owner's dream.

BYTE POWER is a software based magazine with over 130 programs per year, most of them in machine language.

And all that for ...

LESS THAN 39 cents A PROGRAM (based on 1 year subscription)

Plus you get reviews on Software or Hardware for your TS2068 and tips on how to program better.

1 Issue \$5.50 6 Months (6 issues) \$29.99 1 Year (12 issues) \$49.99 18 Months (18 issues) \$69.99 2 Years (24 issues) \$89.99

All prices in U.S. currency.

SEND CHECK OR MONEY ORDER TO:

1748 MEADOWVIEW AVENUE PICKERING, ONTARIO, CANADA LIV 368 the stack always remains available with it, and we can happily forget about it, once more. The only disadvantage is that the stack size becomes limited (they allow us 512 bytes, or 256

entries). This is normally not a problem.

The ability to have the RAM Resident Code in two different locations has another advantage. Although the TS2068 only moves code to high memory when the second display file is active, you can move it (and the stack) there yourself. If you can choose to run it in either chunk 3 or 7, you don't have to tie up one of your precious eight chunks just to keep the RAM Resident Code available to you. Simply switch back and forth to whatever chunk your own code isn't using at the moment. (Of course, you'll have to keep track of where the RAM resident code IS, in any given situation.) Also, if you should return control to the TS2068 ROM, you'd do well to put the RAM Resident Code back where the computer expects to find it.

DNWARD, INTO THE PAST

Last time, we looked at how to read and write to the bank switching registers in the extended bank switching hardware. We then saw a quick summary of what the registers did, with a promise to explain them in detail, this time.

To recap, there are four input and four output registers, which correspond to four memory-mapped I/O locations. We call the registers CO, AO, 8O, and 4O, and they sometimes are linked to memory locations COOO, AOOO, 8OOO, and 4OOO, respectively.

to memory locations COOO, AOOO, 8000, and 4000, respectively.

Each expansion bank has its own register set. When we write
to certain registers, every bank will "pick up" the information.
In other cases, when we write to a register, the information

goes only to a selected bank.

To further complicate things, only writing to some "registers" will actually cause data to be put in a conventional register. In other cases, it may only change certain bits in a register, or not go into any hardware register at all! The "Bank Switching Registers" form a motley crew of circuit functions that are as different from one another as the Marx Brothers, and

are just as wild when we put them together.

Figure 1 is a block diagram of a "generic" bank switching SCLD. Note that in reality, a RAM bank SCLD would have included memory refresh and address multiplexing circuitry, for dynamic RAMs. A ROM bank SCLD would have a set of chip enable signals. But the figure does contain all of the Bank Switching Registers, and these should be common to both SCLD types. It cna then be used to show how the bank switching scheme works. It also shows how the odd bank switching philosophy selected by Timex would have allowed the SCLD chip to go into an inexpensive package

with a very small number of pins.

Note that this is only a block diagram, not a complete circuit layout. Also note that it's based entirely on an analysis of what the ROM software is doing. If the designers at Timex intended additional functions not supported in the original TS2068 ROMs, we'll know nothing about them. Lastly, please note that the connection to the RESET signal is probably not what the Timex designers actually planned. It's included here to suggest that there has to be some way to "disarm" all the horizontal select registers when the computer is first turned on. Otherwise they'd start out filled with random bits, and numerous banks would all try to "take over" the same memory chunks at power-on, with some very lively results. Actually, an odd bit of code in the initialization software suggests that each bank is "unlocked" after the Horizontal Select register is disarmed through software. This suggests that the SCLD should also contain some power on "lock-up" circuitry to keep each bank out of mischief until the computer straightens it out. We'll talk about this more when we look at the software that actually uses it. (See Flowchart 3.)

As we said last time, register data is sent to the Expansion Bank SCLDs one nybble at a time, to cut down on the number of SCLD pins. This means that the SCLD has to alternately steer the nybble into the right and left half of the byte it's reconstructing. We also said that sending 02 to register CO will reset the nybble steering logic, just in case a noise pulse may have sent a "false nybble" out, messing up the steering of later

nybbles.

But if this is all we do, it won't work. If the nybbles are not being read propely, then the 02 sent in to correct the problem won't get read either. This is why we said that the CO register must interpret the 02 command, even if the nybble synchronization is faulty. It also has to be able to interpret it if it's sent as only a SINGLE NYBBLE (just the 2), since that's how the routines READ BS REG and WRITE BS REG send it.

that's how the routines READ BS REG and WRITE BS REG send it.

A "proper" implementation requires all of this, though it's a job to implement. Things get much simpler if we "bend the rules", just this once. Our little trick centers around the fact that all commands to the CO register have "O" as their most significant nybble, only the "O2" command has data line D1 set,

and this command is only sent by the READ_BS_REG and WRITE_BS REG routines, which send it in the single nybble version, only.

And so, if we agree NEVER to send the 02 command to register CO except in the single nybble version, the hardware will be much simpler. Any time we write to the CO register with the D1 line set, the nybble steering logic is reset. The ROM code is completely agreeable to this trick, and so the good folks at Timex may well have had the same idea. Figure 1 is drawn to reflect this simplification. Let's walk through it now.

The lower 4 data lines come in at the top, flowing to the Nybble-To-Byte Converter. Every time the select logic detects that we're writing to a Bank Switching Register, it sends the NYBBLE CLOCK signal, allowing the Nybble-To-Byte Converter to accept the nybble. Whenever the select logic detects that we're writing to register CO with D1 set, it sends the CO-RESET-NYBBLE signal, which resets the nybble steering logic.

The functions mentioned so far are common to every bank. This means that if you're building your own expansion banks, and are putting more than one bank on a single board, they can share

this circuitry. (Just thought you'd like to know.)

The Nybble-To-Byte converter reconstructs the original byte we intended to send. Whenever the "second nybble" is written in, the select logic sends out another signal. If the nybble is written to register CO, then the signal WR-CO is produced. When it goes to register AO, then the signal WR-AO is sent. Similar things based for WB-2O and WB-4O. Note that there signals must things happen for WR-80 and WR-40. Note that these signals must be timed so as not to occur until AFTER the Nybble-To-Byte converter has a byte ready to present.

Using this scheme, when we write to register 80, our value ends up in the Bank Number Access block. This block may also be shared. This works because each bank has its own number. If we wish to change the Horizontal Select byte for a certain bank, we first write the bank number to register 80 (Bank Number Access) and then the Horizontal Select byte to register 40 (Horizontal Select). Only the Horizontal Select register for the bank we have "accessed" will be changed. The bits are high active; that is, if a bit contains a "1", then its corresponding chunk is allocated to that bank.

Registers that cannot be shared have that property because they contain information that's unique to their own bank. As such, we'll refer to them as Unique Bank Registers. Those that can be shared will be called General Bank Registers. (Bank Number Access is General; Horizontal Select is Unique.)

A bank knows it's being accessed when the number Bank Number Access register matches another block called the Assigned Bank #. When they're equal, the 8-Bit Comparator sends the ACCESS-THIS-BANK-1 signal, which makes it possible to write to the Horizontal Select register, or to read from any of the four read-registers in that bank. The Assigned Bank # register is set from a write to register AO, but only under a very special situation that we'll call the "setup mode". We'll discuss this in the section discuss this in the section on the Daisy Chain. Ordinarily,

writing to register AO does something very different.
When the system is in what we'll call the "normal mode",
write to register AO sends the "Universal Deselect Byte" to expansion banks. This looks a bit like a Horizontal Select byte, but has important differences. Each bit represents a memory chunk, just like a Horizontal Select byte, but if a particular bit contains a zero, each Horizontal Select register will leave its corresponding bit alone. If a particular deselect bit contains a one, then if ANY Horizontal Select byte has a one in that location, it RESETS it. As such, the Universal Deselect byte tells all banks which chunks they must give up.

So, if we want to give chunk 5 to expansion bank #07, first make sure that the Dock and EXROM banks don't have it. (The BANK ENABLE routine would first give this chunk to the Home Bank.) Then we send the hex value 20 (bit 5 set) to register AO. Now, if any expansion bank had chunk 5, it will have relinquished it. Next, we send 07 (the bank number) to register 80 (Bank Number Access) and finally we send 20 (bit 5 set) to register 40 (Horizontal Select). We have now given chunk 5 to bank 07.

Unfortunately, in the above example, we've also wiped out whatever value was originally in the Horizontal Select register. (Actually, even the BANK ENABLE routine acts this crudely for all but the Home Bank.) If we wished to treat at least the Expansion Banks with a bit more dignity, we could have first read its Horizontal Select register by sending 07 (the bank number) to register 80 (Bank Number Access) and then reading the register pair 80 and 40. (Remember, the READ BS REG routine reads PAIRS of registers.) We would then have the Horizontal Select byte as it had already been set for that bank. We could then have only changed bit 5, and any other chunk that was already selected for this bank, would remain selected.

It's also possible to read the register pair CO and AO, for the bank number presently being accessed. While the ROM software reads this pair, it only looks at bit 2 of the resulting byte. This happens to be bit 2 of register AO, and every bank has this bit grounded. If we look at the TS2068 schematic, we see that




Great New Graphics Design Program for the 2066 by



Lemke Software Development

Pixel Sketch and Graphics Editor 2068 version 2.0 is an update of the original PS/GE 2068 with the same powerful graphic editor capabilities: WINDOW COPY, ERASE, ROTATE, ZOOM, WIDE VIEW, PAINT SHADE/FILL, MIRROR IMAGE, IN-VERT, and DIGITIZE. MERGE parts of two screens into one screen. Full use of all TS 2068 attributes.

Pixel Sketch and Graphics Editor 2068 uses the ADVANCED VIDEO MODES for EXTENDED COLOR and HI RESOLUTION (512 x 176) GRAPHICS. PS/GE 2068 version 2.0 is JOYSTICK controlled, MENU driven, EASY to use, and FUN. FREE-HAND draw and erase are 2 times faster now. "OOPS!" function helps un-do errors. Compete 20s page user guide. NEW FUNCTIONS: CONNECT will connect designated points together. CHANGE FONT activates STANDARD, BOLD, MODERN, and ITALICS set modifiers. Any character set can be modified to get BOLD, MODERN or ITALICS versions of that character set. LOAD FONT allows the user to LOAD their own favorite FONT. A sample font - CHANCERY - is provided with the program. With CHANGE FONT you get BOLD CHANCERY. Pixel Sketch and Graphics Editor 2068 version 2.0 is Tasman, Aerco, and A&J Mikrodrive CPI compatible in al of the 2068 video modes (Standard, Extended Color, and Hi Resolution). Compatible with most dot matrix printers. Can access variable dot density functions of STAR and EPSON type printers to control page size and location! Also 2040 type printer compatible. Get YOUR copy of: Pixel Sketch and Graphics Editor 2068 version 2.0 from LEMKE SOFTWARE DEVELOPMENT today! Only \$19.95 ppd. (owners of the original PS/GE can send original tape (proof-of-purchase) and pay only \$10.95). Send legal size SASE for information and a complete catatlog of top quality programs. EXTRA: Now with your order you get FREE a 32 column screen to 64 column (hi resolution) screen conversion utility program. Can even combine 2 standard screens to make 1 hi resolution screen!!



S D Lemke Lemke Software Development

2144 White Oak Wichita, KS 67207

D2 line (and ONLY the D2 line) has a 10K pullup resistor. As such, if we put a bank number in register 80 and then try read that bank's CO and AO register pair, the resulting value will have bit 2=0 if the bank exists, and bit 2=1, if not. This function is used during system initialization to find out how

many banks are actually plugged into the system.

If all of this looks like a programming nightmare, because it is. Don't forget though, that the initialization software and the RAM Resident Code will normally handle it all for us. The only people who really need to know how to directly program the expansion banks are those who plan to build their

own, and have to know how to debug them.

Since the bank switching SCLD only uses address lines Al3-Al5, there can only be a limited number of possible Bank Switching Registers. These are EO, CO, AO, 80, 60, 40, 20, and OO. Since only the top 3 bits are actually used, EO would be the same as FO, or E7, for example. Each of these corresponds to a single memory chunk.


But the possibilities are even more limited than this. What we've said implies that reading a register happens when we read a memory location from its corresponding chunk, and the memory mapped I/O is enabled. But running machine code in that chunk also causes memory to be read. As such, code that can activate the memory-mapped I/O cannot run in a chunk that corresponds to any register. The only routines that ever access them are WRITE BS_REG and READ_BS_REG, which we walked through last time. These routines are part of the Bank Switching Code, and can be located in either chunks 3 or 7, so the corresponding registers EO and 60 must not be implemented in hardware. (Nor should the Bank Switching Code be relocated outside of chunks 3 or 7!!!)


Also, it's possible that an interrupt could occur during the short time that these routines enable the memory-mapped I/O. This would cause the keyboard routine in chunk 0 to be run before returning, so register 00 cannot be implemented in hardware. This leaves register 20, which is not used, and has no apparent problem with being used. All of this is mentioned because, if you've implemented the necessary registers, it should be fairly easy to try to add more for your own use. explanation (hopefully) shows that only register 20 is worthy of any consideration, whatsoever. But note that register 20 is comparable to memory locations 2000-3FFF. If we totally forget about using 20 as a new register, it would be possible for a ROM Novel∫oft announces a new dimension in capability for you 2068!

... And it's about time!







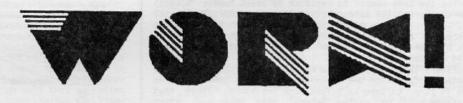

THE WORX! IS A SUITE OF PERSONAL ORGANIZATION PROGRAMS WHICH HELP YOU MAKE THE MOST EFFICIENT USE OF YOUR TIME AND THOUGHTS!

A unique combination of planning aids, decision tools, and utilities.

- * Scheduler/Planner
- * Notepad
- * Telephone Book
- * Programmable Calculator
- * Decision Factoring
- * Real Time Clock

- * Biorhythms
- * Perpetual Calendar
- * International Time Zones
- * Superb Manual
- * Includes Spectrum & TS2068 Versions
- * Supports Microdrives

A TIMELY ADDITION TO YOUR SOFTWARE LIBRARY...THE WORX!

- \$19.95 U.S. Plus \$3.00 S & H



Novel oft PROUDLY PRESENTS THE ALL NEW...

VERSION 1.1

- Pull-Down Menus
- Several Brushes
- Spray
- Auto-Fill
- Zoom
- Undo
- Several Text Fonts
- · Cut & Paste Windows

- · Auto-Speed Control
- · Magnify & Reduce
- · Rotate & Mirror
- Full Attribute Control
- · Fully Elastic Shapes including Circle, Box, Triangle, Ray and Line
- Fast Ellipse and Arc

- Includes Spectrum & TS2068 Versions
- Supports Microdrives and Kempston Joystick
- · Includes GALLERY, the slide show/animator
- 5 Samples of Artwork
- · Excellent Manual

Unshackle your creativity with ... ARTWORX!!

ARTWORX VI.1 - \$19.95 U.S. plus \$3.00 S & H

Novel∫oft INTRODUCES THE REVOLUTIONARY NEW BASIC COMPILER...

TIMACHINE

The dream of every BASIC programmer has now been realized!

- * TIMACHINE will turn your BASIC into super-fast machine code, running up to 200 times faster!
- * Handles floating point operations like SIN, COS, TAN
- * Handles all BASIC except I/O
- * Includes an excellent manual and 4 demonstration programs
- * Compiles up to 27K in seconds
- * Includes Spectrum & 2068 versions

Super-Charge your BASIC programs with... TIMACHINE!

TIMACHINE - \$19.95 U.S. Plus \$3.00 S & H



bank with just a 16K EPROM to contain a completely new and upgraded version of the Bank Switching Code in those locations.

(The stack would have to go elsewhere.)

At the bottom of the diagram, we see a block called Chunk Select Logic. This compares bits A13-15, which define which chunk is being accessed, and the Horizontal Select byte, which define which chunks the bank "owns". The use of IOA5 tells it wether we're really accessing memory or just a bank switching register. If the TS2068 is accessing one of this bank's chunks, then the ENABLE signal is sent out.

Note that this logic doesn't check MREQB. If the TS2068 isn't accessing memory, then the ENABLE signal may switch back and forth, but it will do so harmlessly, since the memory select logic further downstream will sort it out. However, the address lines settle out a full clock cycle before the MREQB line does, and so this buys us extra switching speed. This is needed because ENABLE is used directly to generate the $\overline{\rm BE}$ signal, and this HAS to be applied fairly early on, but again is harmless $\frac{if}{BE}$ memory isn't being accessed. (Those of us who've used the $\frac{if}{BE}$ line in our own projects learned this the hard way; it just seemed polite to pass it on to save anyone else the trouble.)

The ENABLE signal should be sent out if IOA5 is high and Al3-15 match the appropriate bit in the Horizontal Register. It also could optionally be sento out if IOA5 is low, A13-15 match the Horizontal Select, and the chunk in question is 3 or 7. (This would let the READ BS REG and WRITE BS REG routines run in an Expansion Bank without getting cut off in mid-instruction when they switch IOA5. No, I don't know why you'd want to do this, but you may have some good ideas that I don't.)

Figure 2 shows an entire expansion bank, including the SCLD we've just discussed. The $\overline{\rm BE}$ signal is generated from the ENABLE line as an OPEN COLLECTOR signal, so that many banks can share the output. An alternate method in use in some products today to simulate a Spectrum Bus generates BE with a logic inversion and

a blocking diode. This is also quite acceptable.

The Memory Decoding Logic will then decode the bank's memory as normal, except for one, or possibly two, additional constraints. For the first, memory is only enabled if ENABLE is active. The second possible constraint is based on educated speculation, but is still, admittedly, a bit of guesswork.

We know that the TS2068 is basically an enhanced Spectrum. Whenever possible, Sinclair's design was used, and Timex did announce that it would release its own version of the Sinclair Microdrives. This device uses its own crude version of bank

SPRITES 2068

FANTASTIC NEW PROGRAM! Exciting & Educational

You've heard of SPRITES. Explore the subject. Create Moving Displays and Games. Buy a copy for your TS-2068, they belong together.

FEATURES:

- SPRITE SERVICE UTILITY (2520 Bytes IMPROVED professionally written machine code)
- SPRITEDRAW Program (Great NEW program makes drawing a SPRITE both fun and easy)
- Operate from BASIC (Utilizes a Machine Code Interface. Twelve SPRITE Commands)
- Operate from Machine Language (VERY QUICK Screen Action! Bonus MCSPRITES program)
- Cassette Tape (Includes demonstrations and instructions. Menu driven. Fun to watch)
- Manual (34 pages written in "user friendly" style for all programmers)

Authors INTRODUCTORY SPECIAL Includes Postage To ORDER: Send Check or Money Order \$19.00 To VERN TIDWELL OR RON RUEGG 1303 Whitehead St. 37529 Perkins Road Key West, FL 33040 Prairieville, LA 70769

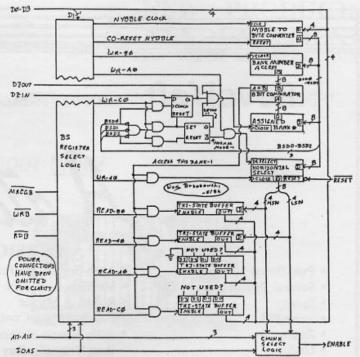


FIGURE 1. "EQUIVALENT SCLD" FOR EXPANSION BANKS This suggests one way (extraccessarily the only way) to implement the Bank Switching Registers

switching, werein it disables the Spectrum ROM and switches in its own when the code in the Error Handler (location 0008) is run.

The extended TS2068 commands, like LOAD *, SAVE *, FORMAT, MOVE, and CAT are implemented in the ROM almost exactly like they're implemented in the Spectrum. That is, if you know the command format, you can type them into a line of BASIC, and the TS2068 will accept them. However, they're set so that when try to RUN them, the error handler at location 0008 will executed. The only way to make the commands work is to switch in another ROM when the instruction is run at 0008. It must then check the cause of the "error", and run an extended command, one is pending.

There are two ways to do this with Extended Bank Switching. We could define another special bank number (perhaps FD) which switches into chunk O when the instruction at location 0008 is executed. But every other expansion bank would have to contain the circuitry to check this, and switch themselves in and out, adding cost and complexity. Alternately, we could put the checking and switching circuitry only inside the microdrive interface, and give it a way to disable all banks when it switches in its un-numbered "Superbank".

The superbank method needs a signal that does to the expansion banks what $\overline{\rm BE}$ does to the Standard Banks. The TS2068 has 3 backplane signals that are named but not wired into the computer. These are DZIN, DZOUT, and BUSISO. We'll see in a minute that DZIN and DZOUT are needed elsewhere, so let's speculate that BUSISO would have disabled the Expansion Banks. (I've heard mention that BUSISO was instead intended to tri-state U15 in the TS2068, but the schematic says it isn't wired to that chip. For the moment, let's consider this is an unreliable rumor, but I'd welcome any evidence to the contrary.)

Getting back to our memory decoding discussion, we may then guess that no memory would be enabled if BUSISO were active. The diagram shows a "Special Buffer" at the BUSISO line, because the lack of a "bar" over its name suggests that it's high-true. This means that the buffer must "see" a low signal if no microdrive interface were plugged in, leaving it floating. This is opposite to what a TTL buffer would do, although some DTL structures would fit the bill nicely. Note that if the microdrive interface were part of the BEU, then BUSISO would never be floating and the special buffer would be unnecessary.

"WHAT DO WE DO NOW, BATMAN?"

Now, all of this may be very nice, but there's still one glaring problem. When we want to send information to a Unique Bank Register, we must first put its number in the Bank Number Access register. If this matches a bank's Assigned Bank #, we can then access that bank's Unique Registers. But the Assigned Bank # is itself unique, so how do we get a value in there, in

the first place? When we first turn the machine on, that register will be full of garbage. How do we find out what it is? Worse yet, what if TWO banks "power up" with the same Assigned Bank #?

It would seem we've painted ourselves into a corner.

DAISY, DAISY, GIVE ME YOUR ANSWER DO

To our rescue comes an incredibly oddball kludge called the Daisychain. The main purpose of this whackiness is to let us put a value into the Assigned Bank # register for each bank. Since we can't use the Assigned Bank # register to access the bank at this time, each bank contains a flip flop that's one bit of shift register (the Daisychain). Ordinarily, each bank's flip flop contains a "O", but a single "1" bit is stepped through, from bank to bank. If a bank has the "1", then we can put a walke into its Assigned Bank # register value into its Assigned Bank # register.

Figure 3 shows the BEU functions that are needed to add Expansion Bank capability. It will drop the BE line if BUSISO is active, or if IOA5 is low and A13-15 indicate that the chunk being used is not 0, 3 or 7. This will prevent the memory in the standard banks from trying to "answer" an attempt to read a Bank Switching Register. The rest of figure 3 is the start of the

Daisychain.

The BEU contains its own form of the CO register. It normally operates in what we'll unimaginatively call the Normal Mode. Everything we've described so far assumes this mode. However, if we send 00 to register CO, we reset all the bits in the Daisychain and enter what we'll call the Setup Mode. This switches flip flops in the BEU and all the expansion banks.

Also, DZOUT at the BEU goes high.

But DZOUT at each expansion bank is still low! Figure 4 shows how this can be. Unlike all other backplane signals, which are shared on a common bus, DZIN and DZOUT are not. This is necessary in order to retain the structure of a shift register. Unfortunately, this is not readily compatable with the normally used method of stacking additional items onto the backplane, which would short all the DZINs together and DZOUTs together, and wouldn't match one DZOUT with the next DZIN. In fact, it would seem that the most convenient method would use expansion banks on edge-connected cards, plugged into a motherboard, filled with female edge connectors.

By sending an O1 to register CO, we clock each flip flop in the daisychain, and the "1" bit moves into the next bank. When we're in the setup mode (and ONLY then) we can write the Assigned Bank # to register AO, and it will be put in the Assigned Bank # register of the bank that has the "1" in its its flip flop. In this way, we individually access each Assigned Bank # register. When we're done assigning numbers, we send 04 to the CO register, which clears all flip flops and puts us back into the normal mode.

AN INTRODUCTION TO THE SYSCON TABLE

If you haven't yet done so, read TM3.3.2, which gives a snail's eye view of the subject. The "proposed expansion banks" are the very same banks we've been talking about. The SYSCON table is a list and description of all the extra "memory" plugged into the TS2068. The LROS and AROS parts describe what you've got plugged into the Dock bank, and comprise 12 bytes. Note that each expansion bank takes up twice as many bytes, suggesting that the good folks at Timex planned to put a lot more "horsepower" into those guys.

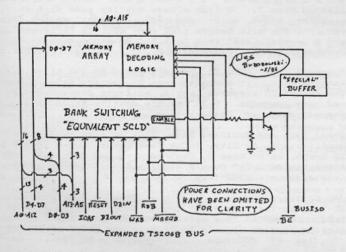


FIG. 2 EXPANSION BANK (SLIGHTLY MODIFIED?)

One thing may appear just a bit distressing. The table description says there's room for only ELEVEN expansion bank entries. Well, it's even worse than this, because the space for eleventh entry is used as a scratchpad by the initialization software . (Possibly a bug.) But if we really want more, we should note that the system variable SYSCON contains the address of this table, and we can change this, and put a larger table anywhere we'd like. Each expansion bank has a chance to run some of its own code during initialization, and one of these can re-write the table. But the hardware that contains this bank should also contain some fancy buffering circuitry for the additional banks, or there'll be TTL fanout problems, not to mention unacceptable capacitance on the bus lines. (Actually, if you try to figure out just how many TTL chips will be needed to replace one bank switching SCLD, you may find it unlikely that even ten expansion banks will ever be run together at the same time.) The table contains numerous options, and is laid out as follows:

follows:

SYSCON Table Configuration

[12 bytes for the Dock Bank; 8 for AROS followed by 4 for LROS. See TM3.3.2] Expansion Bank descriptions follow. One 24 byte block for each bank

00 01=RQM Bank : 02=RAM Bank 1 00=Bank Inactive Ol Bank #. MSB is set if bank is not yet renumbered The following is copied from locs 0000-0015 of ROM Expansion Banks: 02\ In RAM Banks; Chunks Available, hi true. For ROM will have bit 5 reset 03 | For ROM Banks, these 3 bytes may contain a JP 04/ instruction for RESET ? (But not used in TS206B ROMs) OS\ Address of the Close Channel routine. It is called with PRM_OUT=2, O6/ and Stream Number on the stack 07\ Address of initialization code (perhaps to open 08/ to this bank, or to mark the bank inactive.) open a channel attatched OA-OC A JP instruction to an error handler? Not used in ROM OD-OF Not used 77 10\ For ROM banks; should have been the boot up address. Instead, because 11/ of a bug, the address of this table entry is the boot up address. 12-13 For ROM Banks. Address of the power-on initialization code (But may not reside in chunk 3) 14 Not used ?? 15 For ROM Banks: 00=Don't initialize ; 01=Initialize to For ROM Banks: Boot up priority. Low number=high priority. Home Bank=80

17 Interrupt Priority. Ram banks get 255. ROM get lower-higher priority

More of these 24 byte blocks, as needed A single byte marks the end of the table:

#############################

> RMG ENTERPRISES < ANNOUNCES SEKTOR 2068 FOR THE FD68 USER

Finally! A full-featured sector editor for use with your 2068 and AERCO FD68 disk system. Very user friendly! Many features that you would not expect at this price!

Some of the features included are:

READ DISK SECTORS - WRITE SECTORS - CORRECT SECTORS DELETE/ERASE FILES - COMPARE BLOCKS - COPY SCREENS TRANSLATE IBM CLUSTERS - MSDOS (2 VERSIONS) AND HORE!

All of this at a price that all FD68 users can afford: ONLY \$15.00+2ph

Available on 5 1/4" disk, 3" disk or cassette. Please add \$5 for 3" disk version. Complete with very thorough documentation.

> AVAILABLE EXCLUSIVELY FROM RMG ENTERPRISES 1419 1/2 7TH STREET OREGON CITY, OR 97045

FOR CATALOG, SEND \$2.00 REFUNDED WITH FIRST ORDER

The portions marked as not used may have been reserved for future expansion, but at least one byte was probably set aside to identify the actual function of each ROM bank. This would allow us to find, at a glance, what additional functions were

actually "squirreled away" in the extra banks.

The left hand column contains the SYSCON Entry numbers. For example, SYSCON 01 contains the bank #, and every bank has own SYSCON 01. As such, the SYSCON Entry number is not a displacement into the SYSCON table, but the displacement into the entry for a particular expansion bank. Only some of the table entries are self explanatory. Each will be discussed as we wade through its use in the ROM code.

A LOOK (FINALLY) AT SOME ACTUAL CODE

From here to the end of the series, you'll have the chance to double-check everything I've told you so far. All of my pictures, tables, and descriptions will have to be consistent with the Timex code. It's fully possible that I've missed something in my search through the ROMs, and I'll be counting on you to let me know if you see anything that looks "suspicious". Together, we can add whatever finishing touches are needed for a full description of the Extended Bank Switching.

Don't forget my promise last time that the software is fairly civilized, though somewhat amusing. If reading the hardware description has been as draining for you as writing it has been for me, we can take heart in the fact that it's all down-

hill, from here on!

Flowchart 1, given last time, is part of the very top level initialization code the machine runs when we turn it on. Part of the Home Bank RAM has already been intialized, and some variables reflect this, but the memory map on page 255 of your TS2068 USER'S Manual shows "Machine Code Variables". The size of this is determined by the contents of the Dock Bank, (See TM5.1.2, TM5.1.2.2 for more information) and the system hasn't yet found out how much memory to set aside. Therefore, this, and the memory following it have not yet been set up. At this point, we check for extra memory plugged into the system:

At XO8E7 we set the initial location of the SYSCON Table. This has space for AROS, LROS, 10 Expansion Banks, and an 11th Expansion Bank area, which (possibly due to a bug) is used as a scratchpad. Its size is fixed, and if we need a larger table, we

must move it somewhere else, ourselves. We then CALL X09F4 which actually builds the table (we'll flowchart this next time).

We then check the SYSCON Table for an LROS. If there is one, there are no machine code variables, so we finish setting up the system variables, and run the LROS according to its instructions (see TM5.1 for more information.)

If there is no LROS, we end up at X090F, checking for an AROS. If we find one, we check its type (see TM5.1.2.). A BASIC AROS uses no Machine Code Variables, so we finish setting up system variables, and return to Home ROM, after setting a flag telling it to run a BASIC program out of the Dock bank. A m.c. AROS uses Machine Code Variables, which we insert and then finish initializing the system variables. We then run the AROS as required.

If there is neither AROS nor LROS present, we end up X0918, where we can initialize the system variables. At X099A, we set up so that the main execution loop in Home ROM will run after initializing (an Expansion Bank can override this, if set up properly). We then point to SYSCON 00 for the first expansion

bank, and enter a loop to check each bank.

In this loop, starting at XO9AC, whe check SYSCON 00. value of 80 marks the end of the table, causing us to end the loop. If it's not 80, then we check if SYSCON 00 has the value 00. This marks the bank as inactive, causing us to point to the next bank in the SYSCON table, and loop to XO9AC.

If the bank is active, we get its number from SYSCON 01. Then from SYSCON 15, we get the Initialization Flag. If this flag is 01, then we will have already run some code in that bank when the SYSCON table was built (more on this next time) and this bank may also "take over" the system after we're done initializing. This depends on its "Boot Up Priority", which we will discuss in a moment. If the flag is not 01, then we point

to the next bank in the SYSCON table, and loop again to XO9AC. However, assuming that the Initialization Flag was 01, we end up at X09C4, which gets SYSCON 16; the Boot Up Priority. (The lower the value, the higher the priority.) If this is the highest priority found so far, then we save it and continue.

Otherwise we loop back to XO9AC.

If it IS a higher priority, we get SYSCON 10. (Note that in my flowchart I accidentally reversed the digits and called this entry 01. SORRY ABOUT THAT!!!) If the code were written properly the contents of SYSCON 10 would be the boot up address. (Where we'd run after initializing.) Unfortunately, due to a bug in the ROM, the address of SYSCON 10 is used instead. (This is a very nasty bug, but at least I can blame THIS error on someone else.) The new boot up address is saved, and we loop again to XO9AC.

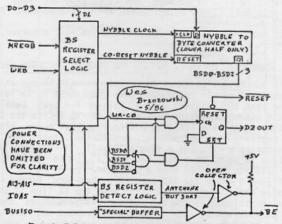


FIG. 3. BEU FUNCTIONS TO ADD BUSISO & DEOUT

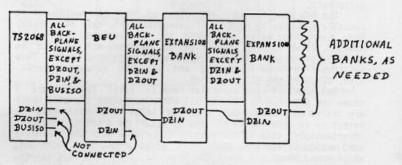


FIG 4. TS2068 WITH EXPANDED BUS AND DAISY CHAIN

When we find a value of 80 at SYSCON 00, then we've reached the end of the table. We leave the loop, find the highest priority bank and boot up to the given address. (Default is Home Bank, at OE2F; the Main Execution loop.)

**** Aerco FD-68 Software ***
Disk File Manager: Lists detailed directory and occupied tracks. Checks disk. Copies single or all programs on disk. All functions support 1 to 4 drive systems. Optional printer output. Available on 5.25" double density disk or on tape. DFM-disk or DFM-tape

OmniDisk: Conversion program for Omnicalc (version 64000). Customize all colors and keyboard buzz. Supports both tape and disk save/load. On 5.25" double density disk or on tape. OmniDisk-disk or OmniDisk-tape\$9.00

MSDisk: Conversion program for MScript. Customize various default values. Supports both tape and disk save/load. NOT take away any text space. On 5.25" DD disk or on tape. MSDisk-disk or MSDisk-tape\$6.00

Programs from JRC Software Diamond Mike | | A true arcade quality game with excellent graphics, speed, color, and sound. Collect enough diamonds and find the exit before time runs out. 22 different screens and 6 levels. Available on 5.25" DD Aerco disk or on tape. Diamond-disk or Diamond-tape ...

Compass: The COMPILER converts BASIC to 100 times faster machine code. It supports over 30 integer BASIC commands. The ASSEMBLER supports labels, multiple statements per line, and user comments. 5.25" double density Aerco disk or tape. Compass-disk or Compass-tape

Great Game and Graphics Show: This program package includes: Oscilloscope, 3D City, Touch Type Tutor, Lunar Lander Game, 3D Graph, Color Mode 2, Easy Editor, and MANY MANY MORE!!! Available on 5.25" double density Aerco disk or on tape. GGGS-disk or GGGS-tape\$17.00

JRC Software Catalog: Also has: Diamond Mike game demo and 3D Tic-Tac-Toe. On 5.25" double density Aerco disk or on tape. ***NOTE: This catalog is FREE with any order of program on disk or only \$1.00 with any order of TS2068 tape. JRC-disk or JRC-tape

ANY TWO JRC PROGRAMS ORDERED AT THE SAME TIME\$32.00

>>> All prices include first class shipping. <<< Please send SASE for more information or check/money order to: Chia-Chi Chao, 73 Sullivan Drive, Moraga, CA. 94556

That's the entire flowchart. I should point out one tiny "buglet" that also crept in. The box marked X09E9 should say
"...Enabling 0,1,2,4,5, and 6 would...". I left out chunk 5 in a transcription error as I copied over my notes. This shows once again that it was more than just my penmanship that began to fail near the end of that long flowchart! (Is my face ever red!)

THE HOMEWORK

If you want some extra things to do, there's plenty. Walk through Flowchart 2 and use its information to continue your own annotated disassembly of the bank switching code. Try to follow what it's doing with the Bank Switching Registers (it's a fairly simple example). If you can do that, then do your own disassembly and flowcharting of the GET_STATUS routine at 6405 hex. Don't disassemble it until after including corrections shown in TM6.5.2. The Expansion Bank portion doesn't change, but the rest is a real mess, and you won't get a feel for how the routine sorts out different banks unless you include the corrections.

Read through the listings of the RAM Resident Code in Appendix A of the Technical Manual, if you haven't yet done so, and also read TM4.1 in I/O channels (yes, streams and channels figure into this subject, too).

Once again, feel free to write with questions or comments, and please include a SASE, if you wish a reply. I am Wes Brzozowski, 337 Janice St., Endicott, NY 13760. I also like phone calls, 607/785-7007...provided you don't call collect, and call before 9:30 PM, EASTERN time. See you next time!

THREE-DIMENSIONAL TIC-TAC-TOE is a variation of a very familiar game, but this arrangement has a different very ramiliar game, but this arrangement has a different twist. In this version the program constructs three identical playing planes, numbered 1, 2, and 3, reading from left to right. Refer to the screen dump of Figure 1. By considering all three of these planes jointly, a player can win-or score points-when three of his marks are arrayed in a straight line, in any direction.

As in the conventional game, players take alternating turns to plot their marks, an "X" or an "O", in any of the three planes. He (or she) does so by first touching a number key designating the plane, and then a letter from the group of keys in the lower-left corner of the keyboard, the keys QWE ASD ZXC. These nine keys correspond to the same nine positions in each plane. The player does not need to press the ENTER key for a selection to be received and recognized by the computer. Touching the ENTER key is reserved for the signal to the computer to clear the screen and start over on a new So avoid ENTER unless a new game is what you have in mind.

To be fair with the players, the program is designed to determine randomly, for each new game, whether the player on the left or the one on the right starts. But the starting player is not permitted to place his initial mark in the desirable center spot of the middle plane. And neither player is permitted to place their marker over one belonging to his opponent. The penalty for any of these illegal moves is forfeiture of that turn to play. turn to play.

This routine contains several error traps which prevent the players from selecting an illegal number or letter. These traps are contained in lines 425, 445, and

590.


System address 23559, rather than INKEYS, was used to indicate which key was selected by the player. This approach simplifies the construction of the program, which requires a wide range of input values.

In a program of this type, the computer must make many time-consuming decisions in the principal loop that lays between lines 60 and 600. Some speed-up would ensue if lines like 500, 510, ect., contained an additional statement: GO TO 600. Such a statement would obviate the need to test any of the conditions that follow. But the need to test any of the conditions that follow. But, the slight additional speed was not considered to be worth

the effort here. Have fun. Feel free to embellish the program

3-D TIC-TAC-TOE

by Warren Fricke



2 REM ** THREE-DIMENSIONAL TIC-TAC-TOE SPECTRUM OF TS 2068 A version by Warren Fricke

3 REM ## "A-22"

5 BORDER 1: PAPER 5: CLS 10 FOR J=USR CHR\$ 144 TO USR C HR\$ 144+15: READ a: POKE J,a: NE HR\$ 144+15: READ a: POKE J,a: NE
XT J
30 GO SUB 1000
40 GO SUB 2000
50 RANDOMIZE: LET p=1-(1 AND
RND<.5): LET t=0
60 IF p=1 THEN PRINT AT 0,0;"R
IGH";AT 0,30; INK 2;"O": LET m\$=
CHR\$ 144: LET i=2: BEEP 0.0,0;"
LEF;AT 0,30; INK 1;"+": LET m\$=
CHR\$ 145: LET i=1: BEEP .00,12
400 REM **PRINT PLAYER'S PIECES
400 REM **PRINT PLAYER'S PIECES
410 PAUSE 0
420 LET a=PEEK 23559: IF a=13 T
HEN CLS: GO TO 40
425 IF a<49 OR a>51 THEN GO TO
410
430 PAUSE 0 410 PAUSE 0 440 LET b=PEEK 23559: IF b=13 T HEN CLS: GO TO 40 445 IF t=0 AND a=50 AND b=115 T HEN GO TO 600

450 LET c=8+(a-49)
500 IF b=97 THEN PRINT AT 7,5+c
FINK i;m\$ AND SCREEN\$ (7,5+c)=C
H\$\$ 32
510 IF b=99 THEN PRINT AT 14,9+c
C; INK i;m\$ AND SCREEN\$ (14,9+c)=CHR\$ 32
520 IF b=100 THEN PRINT AT 11,9+c
FINK i;m\$ AND SCREEN\$ (11,9+c)=CHR\$ 32
530 IF b=101 THEN PRINT AT 4,5+c
CHR\$ 32
540 IF b=113 THEN PRINT AT 4,5+c
CHR\$ 32
550 IF b=115 THEN PRINT AT 4,5+c
CHR\$ 32
550 IF b=115 THEN PRINT AT 6,7+c
CHR\$ 32
550 IF b=115 THEN PRINT AT 6,7+c
CHR\$ 32
550 IF b=115 THEN PRINT AT 6,7+c
CHR\$ 32
550 IF b=115 THEN PRINT AT 6,7+c
CHR\$ 32
550 IF b=115 THEN PRINT AT 6,7+c
CHR\$ 32
550 IF b=120 THEN PRINT AT 12,7+c
FINK i;m\$ AND SCREEN\$ (12,7+c
FINK i; 590 IF b<97 OR b=98 OR b=114 OR b=121 OR (b<119 AND b>115) OR (b<113 AND b>101) THEN GO TO 430 600 LET p=NOT p: LET t=1: GO TO

1000 REM **TITLE & INSTRUCTIONS
1010 PRINT AT 2,7; "THREE-DIMENSI
ONAL"; AT 4,9; "TIC-TAC-TOE"
1020 PRINT AT 7,3; "This version
does not keep score nor determ
ine a winner. Players must do
this themselves, as the rules may
vary." vary... 1030 PRINT AT 11,3;"The computer determines ran- domly whether L EFT or RIGHT starts the game

1040 PRINT AT 14,3; "Computer will keep tract of whose turn it is selection at the selection of the selectio

0.50 PRINT AT 20,3; "Stand by." 1100 PLOT 56,150: DRAW 136,0 1110 PLOT 72,134: DRAW 88,0 1120 PAUSE 800: CLS 1130 RETURN

2000 REM ** 3-D BOARD
2010 FOR m=36 TO 164 STEP 64
2020 FOR n=160 TO 88 STEP -24
2030 PLOT m,n: DRAW 48,-48
2070 NEXT n: NEXT m
2200 LET m=124
2210 FOR n=36 TO 212 STEP 16
2215 PLOT n,m-n: DRAW 0,72
2220 IF n=84 THEN LET m=138
2230 IF n=148 THEN LET m=252
2240 NEXT n
2250 FOR n=20 TO 212 STEP 64
2260 PLOT n,88: DRAW 16,0
2270 NEXT n
2290 PRINT AT 0,4; "T-HAND PLAYER
'5 TURN. USE"
2300 PRINT AT 2,3;1;AT 2,11;2;AT
16,27;3
2310 PRINT AT 18,0;"JUST touch t
wo keys: 1,2, or 3 & one letter
key. Use the ENTER key only to
start a new game. Gowhen ready."
2350 RETURN

3000 DATA 48,76,63,66,66,34,50,1 2,144,80,48,16,24,20,18,17

Now Available! "THE BEST OF SUM"

One of the most popular features of SUM Magazine has been our stockpile of back issues. But our stockpile has been depleted. In its place we now have "The Best of SUM" - 112 pages of the articles, reviews, program listings, and hardware projects that have made SUM so popular - all taken from the first 3 years of our publication.

Some of the articles include: Building Your Own Spectrum Emulator, Doing 1000 Repairs, Word Processors for the 2068, UDGs on the TS-1000, Extensive Review of the Zebra Disk System, Adding a Keyboard to the 2068, and Enhancing the A & J Microdrive.

\$11.95 postpaid

Two Special Issues SUM MAGAZINE

SUM Magazine has two Special Issues for sale which were devoted to special topics:

QL Special Issue — 28 pages devoted mostly to an indepth review of the QL hardware and an overview of the software. Very popular with readers and of great interest to all thinking of purchasing a Sinclair QL. Price: \$3.95.

TS-1000 Special Issue — 28 pages devoted to articles, reviews and programs for the TS-1000 and ZX-81 computers. A lot of new products are discussed and suppliers listed. Price: \$3.95

Special Deal!! Get "The Best of SUM" and BOTH Special Issues for only \$16.95 postpaid

SUM Magazine, 3224 NW 30 Avenue, Gainesville, FL 32605 — 904/462-1086 (eve.)

Beaver Writer

first 80 column word processor for the T/S 2068 compatible with AERCO I/F and most EPSON compatible printers

\$25.00 US \$30.00 Can \$15.00 US

260 END DEFine

Character Font Generator

design your own UDG or character sets comes with ASCII. Bold, Future, and Medieval fonts joystick required

Advanced Video Modes

our #1 best seller!

supports normal, dual, extended colour, 64 column mode and now with 80 columns loads in 15 seconds

\$20.00 Can \$20.00 US \$25.00 Can




Send cheque or money order for \$1.50 for our complete catalogue with Demonstration Tape plus bonus programs. We pay the postage & handling costs on all orders!

BEAVER COMPUTER PRODUCTS


999 MUNROE AVENUE, WINNIPEG, MANITOBA, R2K 1J4

he best DAM software around?

90 gun 100 REMark PROGRAM BY RON S. MORR 10/04/84: WRITTEN ON BELL AND HOWELL'S 110 REMark CHICAGO DATA CENTER MAIN FRAME USEING PASCAL/VS RELEASE 2.1 120 REMark CONVERTED TO SuperBASIC BY DAVID JOHNSON 09/07/86:CONVERTED 130 REMark WITH KIND PERMISSION FROM THE AUTHOR FOR THE Sinclair QL 135 WINDOW 512,256,0,0:CLS 140 DEFine PROCedure BANG 145 CURSOR 50,50,10,10 150 CSIZE 3,1:PRINT "BANG!" 151 death 155 END DEFine 170 DEFine PROCedure gun 172 LET chambers =RND (1 TO 6) 175 i=1:n=0:click=RND(1 TO 6) 180 IF click=chambers THEN BANG 181 IF click<>chambers THEN live 185 END DEFine 190 DEFine PROCedure live 195 CURSOR 50,30,10,10:CLS 200 CSIZE 3,1:PRINT"Safe!... For now! @!\$%#&" 210 PAUSE 200: gun 220 END DEFine 230 DEFine PROCedure death CLS:CURSOR 50,30,10,10 235 240 CSIZE 3,1:PRINT"You are DEAD! YEA!" PRINT"PLAY AGAIN? (Y/N)" 245 250 INPUT as: IF as="y" THEN gun IF as="n" THEN STOP 255



QL KILL (not recommended for stomachs) is a simulation of the ever so popular (?) RUSSIAN ROULETTE game. The listing was converted from a PASCAL program and contributed by David Johnson, with permission from the author, Ron S. Morr. David would like to get in touch with other users. Write to: 2399 St. Rt. 95, Edison, OH 43320.



QL Peintre

A Review by Paul Bingham

French language suffers the fate of English at times; being difficult to pronounce properly when read from text. So it is with QL "Pine tree", "Pain tree", "Pee-in-tray", or "Pay entry" as this program may have been so falsely introduced to you. If we could all read French it would be instantly obvious that QL "Painter" is a French screen artist program.

QL PEINTRE is a classy program in many ways. After loading begins a picture of two chimps appears: seemingly a digitized photo image. Nearly three more minutes of on-and-off file loading finally brings a blank subscreen with sharp surrounding icons. French and English titles toggle back and forth with a key press. The look is sophisticated, elegant. The icons are easily readable

and easily used.

Should one require additional help, the documentation is excellent. Now this is not a flashy instruction booklet, but it is the first one I have seen which states simply what to press next and then accurately tells what the outcome will be. Even though the instructions do not mention it, I have found it helpful to have a formatted cartridge on hand for saving a sceen prior to running QL Peintre. There is a Microdrive icon, but like so many other QL software titles, it does not provide for formatting of a cartridge. It does provide a nice scrolling directory option, though!

Like GRAPHIQL, reviewed by Vince Lyon in the March/
April 86 issue, QL Peintre has many, many abilities.
Some are far more versatile as well. Circle and Arc
drawing are so much improved! Fabulous, too, are the two
type faces (one very MacIntosh) in two sizes with four
spacings each. Line and spray widths with intensities
are very adjustable as are the colors and textures. But
keep in mind that QL Peintre is capable of only four
colors in High Res mode F1, and will not run in mode F2
on an American TV. QL Peintre supports all the colors in


F2 mode.


Is Peintre perfect? It does have a limitation or two. It incorporates the standard security checks requiring a backup and original present. The screen work area is much smaller than other such programs. It only provides 63% of the screen that GraphiQL uses. It also does not have a wrap-around feature when drawing. If one bumps into the work space edge diagonally, the cursor continues straight along that edge until stopped. Jotting and spraying do not quite reach the edge of this work area either. These are really minor items, however. Unlike GraphiQL, Peintre never does "growl" back!

QL Peintre isn't intended as a drafting design or CAD program. QL WORLD MAGAZINE (from England), carried a review in the May '86 issue, of six such programs. Most CAD packages were more expensive than Peintre, too. Missing from their review was a new release, TECHNIQL (from Talent...writers of GraphiQL). Such would be good

future Quick Look fare.

QL Peintre has a good set of save and printer options. The Printdump program is unprotected and may be included by the user in other programs. I was amazed to find that it will load almost any saved screen, including ones from COSMOS (reviewed last issue) and GraphiQL, too. Screens can then be altered and printed out on an Epson printer. But the output process takes 22 minutes! GraphiQL's beats it by three or four minutes. But unlike other dumps, this produces an output sideways! So if your printer is like my little Epson Homewriter 10, most graphics look slightly elongated. Now with Peintre they just come out taller.

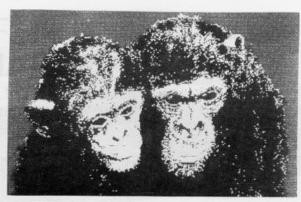



QL Peintre is sharp and professional. It has limitations but is very polished and easy to adapt to. If the programmers in France keep this up, I may start learning to read French.

2068_TO_QL

WE ARE BUILDING BRIDGES BETWEEN TS2068 AND QL. WHETHER THIS IS UPLOADING OR DOWNLOADING QL.IMPORTING OR CONVERTING BASIC FROM TS2068 IS IMMATERIAL.THIS IS NOT SOFTWARE. THIS IS A SERVICE. WE CAN TRANSPORT THE BASIC FROM TS2068 OR SPECTRUM TO QL. NO SOUND OR MC.

BASIC PRICE PER 'LOAD' ON SUPPLIED CARTRIDGE...\$16.95
ON OUR CARTRIDGE--ADD \$3.00
WE ACCEPT PERSONAL CHECKS. ORDERS GO OUT THE NEXT DAY.

THE 'LOAD' CAN BE:

- 1.A BUNCH OF MERGED PROGRAMS.
- 2. PROGRAMS AND DATA.
- 3. DATA IN ONE OR TWO DIMENTIONAL STRING ARRAYS.
- 4. DATABASES LIKE PRO/FILE 2068 OR MASTERFILE.

IF YOU WOULD RATHER SKIP THE MERGING PROCESS THEN ADD \$1.00 FOR EACH ADDITIONAL PROGRAM AND ARRAY. EACH ADDITIONAL 'LOAD' WITH THE SAME ORDER.....\$11.95.

YOU WILL GET TWO FILES OF YOUR BASIC PROGRAMS: THE TRANSLATED VERSION, WITH THE SAME LINE NUMBERS, AND THE FACSIMILE FOR REFERENCE—BYTE FOR BYTE.

IF YOU ARE ONLY THINKING QL AND WONDERING HOW YOUR SPECIAL BASIC WOULD LOOK IN SUPERBASIC THEN SEND US A CASSETTE WITH ABOUT 30 LINES OF IT, SASE AND \$1.00 FOR THE PRINT-OUT. ENCLOSE A CARTRIDGE AND ADDITIONAL \$3.00 TO GET BOTH THE PRINT-OUT AND THE SAVED LINES.

EVERY BYTE OF YOUR PROGRAM OR DATA WILL BE TRANSFERED.

LESS THEN 2% NEED BE EDITED. DATA NEEDS NO EDITING.

EUGENE PERERVA, 358 RAILROAD AVENUE

BRIDGEPORT, CT 06604 (203) 576-8728

SPECIAL FREE GIFT WITH ORDERS: THE FIRST ISSUE OF AMERICAN FIRST QL MAGAZINE:

QUANTUM LEVELS

SHARP'S INC.

Rt. 10 Box 459 Mechanicsville, VA 23111 (804) 746-1664 or 730-9697

QL Computer with I.C.E. & War in the East	\$289.00 (Includes Postage)
QL Printer	\$249.00
512K Ram	\$199.00
Microdrives (4 Pack)	\$9.95
QL War in the East (Secenario I)	
QL Service Manual -	
Includes all Circuit & Layout Diagrams	\$24.95
Write for Entire Catalog VISA & MASTERCARD ACCEPTED	

RMG ENTERPRISES

QL

QL

QL

QL

IS PROUD TO ANNOUNCE

A NEW BUSINESS SOFTWARE PACKAGE FOR THE QLI

INVENTORY/INVOICING PACKAGE

FROM EXECUTIVE WORKSHOP

If you are running a small business that depends on a GOOD inventory control program, THIS IS THE ONE FOR YOU!

With our new package you can keep track of all SALE, INCOMING STOCK, CURRENT STOCK VALUES – BOTH WHOLESALE & RETAIL, as well as generate the following hard copies:

INVOICES - BACKORDER MEMOS - PAKCING LISTS - SHIPPING LABELS - INVENTORY REPORTS PURCHASE ORDERS - FLAGGED ITEM REPORTS - PRICELISTS - SELECTIVE PRICE LISTS

All of this and the best part is, WE WILL CUSTOMIZE THIS PROGRAM TO SUIT YOU When you order this package, you will be sent a short questionaire to fill out and return. Within 2 weeks you will receive your program, ready to go!

ALL THAT AND AT A PRICE OF ONLY \$59.95 +2ph

FOR MORE INFORMATION ON THIS AND OTHER FINE QL PRODUCTS
CONTACT:

RMG ENTERPRISES

1419 1/2 7th STREET OREGON CITY, OR 97045 (503) 655-7484

(FOR CATALOG - SEND \$2.00 - DEDUCTED FROM FIRST REGULAR ORDER)

The Future of the QL in America And Some QL Graphics Systems

by

Mike de Sosa

THE QL IN AMERICA

Many of us in recent years have, in anguish, witnessed the demise of first the Timex Computer Corp., then Sinclair Research USA, and finally Sinclair Research Ltd., itself. I say "in anguish" because with their failure went fond hopes of continuing professional support for our computers and dreams of a proliferation of third-party hardware and software. These organizations, blessed with an excellent product and the good will of many thousands of cult followers, just plain "blew it" and, in the event, passed up the opportunity for millions in profits. None seemed to learn from its predecessors. In each case, arrogance and poor customer relations prevailed. Statements like "we don't really need the U.S. market" and "each Sinclair employee produces millions in earnings" added to the insult of telephone calls that were not returned and letters unanswered. Many recommendations from periodicals, users' groups, and loyal customers, some based on time consuming research, were spurned. If it was not the company's idea, it was not, needless to say, a good idea. The outcome, the result of arrogance and delays due to noor management, was probably inevitable.

due to poor management, was probably inevitable.
QL users and would-be users in the U.S. are now dependent on a single distributor offering a limited number of QLs through a dozen dealers--without factory or engineering back-up. Before taking the plunge, wouldbe QL buyers should be aware of a few things and then satisfy themselves that their QL will be adequately supported. Item--the QL will be replaced in a year or so (perhaps this fall in the UK) by one or more follow-on "QL-compatible" systems that do not use Microdrives. Item--when the present small stock of QLs are gone, no more may be manufactured; this will affect the availability of replacement parts and maintenance and the quantity and cost of future software for the QL. Item-there is a difference in QDOS addressing that causes many software programs to work improperly on U.S. machines: for example, QL Project Planner, QL Decision Maker, GraphiQL, and VROOM! (This problem also affects U.S. software designers trying to get their programs to work on European QLs.) Item--the Psion software programs sold with QLs in the United States are now several versions old and the documentation for these programs is older yet. Item--the QL is poorly documented in the QL User Guide, and scores of books on the QL--all written early on before the operating system was perfected and before peripherals were available -- do little to help the situation. (This problem--a major shortcoming of the QL since its launch, and before it the T/S 2068--was ignored by Timex and Sinclair organizations despite urgent pleas and recommendations by QL users.) Item--many QL users are now getting bad advice...better methods of communicating authoritative information regarding the QL are needed.

I do not believe that the QL distributors and dealers are moving nearly fast enough to correct these

problems, all of which are capable of easy and inexpensive solution. For this reason, prospective QL and QL software buyers should pressure the distributors and retailers to do something about all of these problems ASAP. In doing so, you would do yourself and them a favor, possibly saving them from a rather predictable self-destruction. Lets have some cards, letters, and calls on this, folks!

The following things should be done soon (and that

doesn't mean "next year"):

a. Supply QLs with the latest version of Psion QL software. (It should cost very little to do this, and

buyers would gladly pay an extra cost.)

b. Supply QLs with additional documentation to supplement the inadequate, frequently erroneous, and badly out-of-date QL User Guide. (Making this supplement available to QL owners here and abroad could make this a profitable endeavor.)

c. Devise a universal "patch" which would permit all European QL software to work properly on U.S. QLs.

(This is long overdue--a result of inaction.)

d. Insure they are getting good technical advice regarding which QL peripherals and software to market in

this country.

e. Decide whether the current U.S. version of the QL, Microdrives and all, should be manufactured further, perhaps with additional built-in or plug-in RAM and RAM-disk software. (An enhanced QL could be profitably marketed in this country for another two to three years.)

f. Make on-the-shelf QLs available with distributor installed disk interfaces, RAM cards, and RAMdisk soft-

ware

g. Select and standardize use of a disk interface with the QL and a single DS-DD drive, preferably a 5 1/4" drive.

h. Establish a toll-free "QL HOT LINE" for three or

four hours a day to answer consumer questions.

i. Advertise the improved product. If nothing is done, that is, if things proceed at the present pace, my prognosis for the QL in the U.S. is a slow death.

QL GRAPHICS/CAD SYSTEMS

There are now many types of graphics systems for the QL, ranging from those used to draw pretty pictures to two-dimensional computer-aided design (CAD) programs to three-dimensional graphics design programs. With one exception, I believe the best of these QL graphics programs are discussed below. (The exception, QL Peintre from France, is discussed by Paul Bingham in this issue of TDM.)

Also discussed this month, is a new and excellent font editor and print utility for the QL which I thought you should hear about. Finally, as an update to last issue's games article, a brief review of YROOM!, the


grand prix motor racing game from France.

29

Q Draw by Psion: Q Draw is the software used by Psion to create the breathtaking graphics for QL Chess and QL Matchpoint. Very user-friendly, Q Draw can be used to create pictorial graphics of all types or to improve upon, or draw from, graphics screens produced by other programs such as <u>GraphiQL</u>, <u>TechniQL</u>, <u>Concept 3D</u>, <u>Easel</u>, or a screen created and saved from <u>SuperBASIC</u>. Q Draw offers four-color, high-resolution graphics as well as the more usual eight-color lower-resolution graphics. (High or lower resolution is not selectable from within the program.) Other features include a variable-width pen (or brush); the exploitation of created "shapes" which may be created or plucked from any screen stored on disk or Microdrive and then manipulated, copied, or stored for later use (a library of useful shapes is included and you may economically create your own library); two screen magnifications; and various cursor forms (a crosshair or screen grid may also be selected). There are no text or curvilinear functions which automatically create arcs, circles, or ellipses. Cursor position coordinates are not available, but this does not seem a great disadvantage in Q Draw. At \$25, Q Draw is the least expensive QL graphics program and in some respects it is the best of the lot--another winner from Psion.

GraphiQL & TechniQL by Talent: These two software programs from Scotland are so complex and comprehensive that a complete description of each is impossible in an article of this length. The best I can do is describe their capabilities and differences to help you decide which of these two superb programs, offering overlapping capabilities, should suit you best.

Talent's designers have had decades of experience in designing CAD/graphics software for mainframe and minicomputer systems. Their microcomputer versions for the QL, while reducing unnecessary complexity, at the same time incorporate several never before seen features.

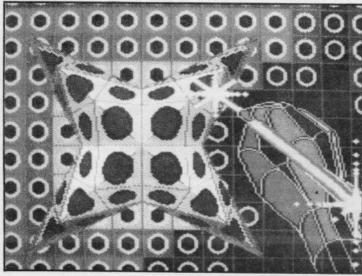

A sample screen from GraphiQL.

GraphiQL is a graphics design program optimized for the computer artist or illustrator. TechniQL is a two-dimensional CAD (computer-aided design) package optimized for the technical draftsman. Although the two programs have few features in common, each can do a fair job at the other's tasks with a little extra effort, but GraphiQL pictures are limited to the size of a single computer screen, while TechniQL pictures occupy many screens and be drawn in many layers (analogous to acetate overlays on an engineering drawing). Both programs have good on-screen HELP facilities. Neither has a variable-width pen (brush).

GraphiQL is primarily, a graphic arts program whose forty-six commands and other capabilities can be used for other purposes, including technical drafting. GraphiQL operates only in the eight-color, medium resolution (256 x 256 pixels) mode. Many methods of creating illustrations are possible, and cursor coordinates and other useful data may be displayed, if desired. Other features include texture and airbrush effects, screen magnification (16x), two text sizes, standard drawing shapes, and comprehensive screen/file handling. Available at \$50, including a 63-page manual, GraphiQL may be found in an improved Sinclair Research version, QL Paint with icon pull-down menus and a 123-page loose-leaf manual.

TechniQL is primarily a CAD and drafting aid, but with good graphic arts capabilities (except for text-printing which is better on GraphiQL and not available in Q Draw). Additional TechniQL features include the following: four-color, high-resolution and eight-color, lower-resolution graphics selectable from within the program; about forty commands which may be executed from five pull-down menus or by two letter key codes; rapid, multi-sheet printer output; multiple magnifications over a wide range; a RAM-efficient design storage system; the capability of creating and manipulating up to 75 elements (cells) as part of a single design; and comprehensive file storage handling. At \$70, TechniQL is the most expensive and comprehensive QL Graphics program.

Concept 3D, distributed by an American software

Concept 3D, distributed by an American software company located in California, is an excellent two- and three-dimensional CAD program, although the distributors do not refer to it as such. Like GraphiQL and TechniQL, Concept 3D is too comprehensive and complex to describe


in detail in an article of this length.

Aptly named, Concept 3D offers several new concepts in graphic design (those familiar with Psion's <u>YU-3D</u> for the T/S 2068 will see some similarities). Operating in three modes, Concept 3D's capabilities may be described as excellent but with significant limitations, for example, it cannot like <u>TechniQL</u> produce layered designs on multiple printed sheets almost automatically. Concept <u>3D</u> produces only one screen dump at a time--and that using the screen dump program on the Psion <u>Easel</u> cartridge.

Concept 3D is, despite its complexity, relatively user-friendly. It includes the following features... several which are unique to the QL: about 50 single-or dual-keystroke commands listed on three main menus and other sub-menus; four color, high resolution and eight-color, lower resolution graphics selectable from within the program; three types of 3D modeling, two of which are automated; rotation of objects around three axes, seen from various perspectives; image magnification and reduction over a wide range; five text sizes; hidden line removal and surface modeling; excellent documentation in a 45-page user manual.

At \$40, Concept 3D is an ingenious and a well-executed program offering several features which are unique to the QL. My kind of program!

Inkwell by Palantir: An inexpensive font editor with print utilities for the QL, Inkwell at \$10 (£8 to



QUANTA members) offers excellent value for money. Eight alphanumeric or symbolic fonts are made instantly available by inserting simple codes in Quill documents. Variable line spacing, print emphasis, inverse printing, and equal or proportional character spacing may be specified for symbols/font characters prepared using a 16x16 font editor. A must for desk-top publishing with the QL.

 $\frac{\text{VR00M!}}{\text{loss}}$ by Pyramide: A grand prix motor-racing simulation by the distributors of 3D Wanderer, $\frac{\text{VR00M!}}{\text{loss}}$ is potentially more interesting to play than $\frac{\text{QL Hyperdrive}}{\text{loss}}$, its QL road-racing rival, but suffers from a fault or two

 $\underline{\text{VROOM!}}$ includes five meandering racetracks of increasing complexity. Pass 10 cars and move on to the next circuit or begin all over again. Graphics and sound effects are fair to good. Your view is from the cockpit

of the race-car: the steering wheel and two front wheels are seen to move in unison. Joystick steering at speeds necessary to pass cars and advance to the next circuit is very tricky.

A victim of the QDOS address differences in U.S. QLs discussed above, <u>VROOM!</u> does not accurately or completely depict the plan of the grand prix circuit in use. This may affect player steering: for example, while you are still shown to be on a straightaway, the track begins to curve. A second fault, perhaps related to the first, is that it is too difficult to pass another car at speed without either crashing or going off the road. At \$30, \$3 more than <u>Hyperdrive</u>, <u>VROOM!</u> is preferable to the former despite its faults.

NEXT ISSUE: "Optimizing QL Quill". Future articles will deal with one main topic and, typically, discuss

new or related software programs.

Note: All QL programs in the article were obtained from CURRY COMPUTER, P.O. Box 5607, Glendale, AZ 85312, 602/978-2902; with the exception of Inkwell, which is available from PALANTIR PRODUCTS, Dept MF1, 60 St. Lukes Road, Bedminster, Bristol BS3 4RX, England.

Beginning Z80 Machine Code Part Four

by Syd Wyncoop

This time, right to business! We are studying the math instructions which are listed in chart 4. This is where it starts getting a little more difficult, but not so that you can't handle it. Up to this point, most of the lessons have been peripheral background needed to make sense out of the rest of the discussion.

We only have two math functions available to us: Addition and Subtraction. As with Ld, this is not as limited as it first sounds. A study of Math Theory would teach you that all math functions are performed with addition. I'll not try to explain this further as it would fill a volume larger than all TDM's published to date. The point we need to understand and absorb is that multiplication is performed by repetitive additions. Likewise, division can be achieved by repetitive subtraction.

It is important that this makes sense to you. Think about the multiplication problem of 12X6. It can be solved by either of the following:

12 12 12 12 8 6 72 12 12 +12 72

Can you see how we can solve division problems by repetitive subtraction? If we had the problem 72/12, how many times can we subtract 12 from 72? Is there a remainder? Simple, isn't it?

This brings us to the first instruction...Add. We have already seen Add in operation, in Lesson 2, and probably have a good idea of its function. Trust me, it performs addition. Some of the later instructions will not be so obvious. We would read the instruction, Add A,E, as "add the value in the E register to the value in the A register and store the result in the A register".

In lesson 3, we learned that the A register is called the "Accumulator". The A register is the only register that can "accumulate" the results of eight bit

arithmetic. If we had wanted the result in the E register, we would need to assign it. Can you guess the needed instruction? You get an "A" if you said Ld A,E. Otherwise, go back to lesson 3.

We also have available the instruction, Sub. The A register performs a special purpose here also. The A register is the only register we can subtract from. As with Add, the A register accumulates the result. You may see this instruction written as Sub A,C or Sub C. They mean the same thing. We will use Sub C as the A register is always implied in eight bit arithmetic.

I have mentioned several times that the A register will accumulate the results of eight bit arithmetic. We need to leave the instructions for some more background.

We have already learned that a single register may only contain a value in the range 0-255. There is a condition known as an "overflow" which occurs when these values are exceeded. The simplest way to describe overflow is by example. Let's assume we are adding 255+1. We have not discussed number systems yet (that's a later lesson) but let's show our example in binary as it will demonstrate the point dramatically:

Decimal Binary 255 11111111 + 1 + 1 256 1 00000000

Look closely at the binary example. Each digit represents a bit of the A register (or any other eight bit location). Assume for now that my answer is correct, and you will note that we are now trying to place a nine bit number into an eight bit hole! The answer returned in this case would be 0, instead of the expected answer of 256. Our example shows an eight bit overflow, but can you see how we overflow a register pair (sixteen bits)?

Our friend, the CPU, has a special register, F, which we learned stands for Flag. It is called this because its job is to keep track of various things for the CPU. This is accomplished by the setting or resetting of a bit of the F register. Setting a bit makes it a 1, and re-setting it makes it a 0. We will discuss this in some detail at a later time.

The bits are referred to as flags due to the fact that they indicate wether or not a certain condition exists. The flag we are now interested in, is the Carry

31

flag. We will also discuss the F register later, therefore, we only need to consider the Carry flag now.

In the above example, we found we would receive an answer of 0. The ninth digit is not lost, as it is placed in the F register as the carry flag. In other words, the Carry flag takes on the value (either 1 or 0) of the overflow from out arithmetic operation. We will soon wee why we would want to save the carry.

Back to the math instructions. We have available the instruction ADC which is read add with carry. To see

the difference, another example:

Add A,E means Let A=A+E

ADC A,E means Let A=A+E+Carry (keeping in mind that the carry will again be set or reset by the result)

ADC will allow us to chain together the needed additions to guarantee the correct result. Some of the same results can be achieved with the register pair instructions, however, there can still be overflows. Study the following to see what I mean:

Ld HL,0040h	Ld H, ooh
Ld BC, 7FFFh	Ld L, 40h
Add HL, BC	Ld B, FFh
Ld B,H	Ld c,7fh
Ld C,L	Ld A,L
Ret	Add A,C
	Ld L,A
	Ld A,H
	ADC A, B
	Ld B, A
	Ld C,L
	Pat

Both of these routines will do the same job. Which makes more sense? Uses less memory? Executes faster? The point is that there are many ways to get the job done and many considerations to why we should choose one over another.

We also have SBC or subtract with carry. This one is special because it is the only way to perform sixteen bit subtraction. We cannot Sub HL,BC. We must SBC HL,BC which implies we know the status of the carry flag. We may not know what's on carry's mind, but we can clear the carry flag prior to performing a SBC by doing an addition, that we know will not generate a carry. One that will work in all cases is Add A,O. The value of A is unchanged and the carry flag is reset (0) or cleared as there is no overflow. We will find other ways to clear carry, soon.

We need to be aware that HL acts as the accumulator for sixteen bit arithmetic operations. HL has much the same favorite status with the CPU as does A. The reason we need an eight and a sixteen bit accumulator is that we cannot add or subtract registers from register pairs and vice versa. In other words, we cannot Add HL,A.

The last instructions for this lesson are special cases of Add and Sub. They are Inc and Dec which are short for increment and decrement. Each will Inc or Dec

by one. For example:

Inc HL means Let HL=HL+1
Dec HL means Let HL=HL-1


Armed with these new instructions, see if you can rewrite the addition routine we had in lesson 2, to avoid the overflow error it contains. Make sure the last instruction is a Ret and use PRINT USR address to run it and return the answer to BASIC. See if you can write a similar routine to perform subtraction.

A final note on the charts I am providing. This is the last time I will include the abbreviations comments. Also, you can usually substitue IX or IY for HL and (IX+d) or (IY+d) for (HL). Therefore, I will not include

them in the charts.

Until next time...happy computin'.

Chart 4	
Registers	! Register Pairs
Add A,r	! Add HL,rr
Add A,n	! Add HL, SP
Add A, (HL)	! Add IX.rr
Add A, (IX+d)	! Add IX.SP
Add A, (IY+d)	! Add IY,rr
	! Add IY, SP
ADC A,r	1
ADC A,n	! ADC HL,rr
ADC A, (HL)	! ADC HL.SP
	1
Sub r	! SBC HL,rr
Sub n	! SBC HL, SP
Sub (HL)	1
	! Inc rr
SBC A,r	! Inc SP
SBC A,n	1
SBC A, (HL)	! Dec rr
	! Dec Sp
Inc r	1
Inc (HL)	1
	1
Dec r	1
Dec (HL)	1
Where: r many single registe	
rrany register pair	
n =any numeric consta	nt 0-2**
nn=any numeric consta	
d =any displacement	0-255
pq=any address	0-255
bd-mily address	

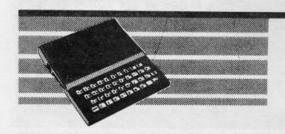

TS 1000/1500 PROGRAM CHAINING Part Three

by Earl V. Dunnington

Parts One and Two of this series covered the VARS, System Variables, and the Safe Area methods of passing data from one program module to another in a chained program.

The Above RAMTOP method of passing data, in chained programs, is very similar to the Safe Area method and is the best of all of the methods, as data stored above RAMTOP is protected from LOAD, RUN, NEW, an expanding program, or the expansion of the display file. About the only thing that can wipe out data properly stored above RAMTOP is a program crash, a power failure, a program bug, or resetting RAMTOP.

The amount of bytes or addresses you can lower RAMTOP and still have the program RUN is determined by the Upper and Lower Limits of the Safe Area of the program. In a Chained Program, the module that requires the most memory in order to RUN, determines the address to which RAMTOP can be set for the entire program. A method for finding the Upper and Lower Limits of the Safe Area and the minimum setting for RAMTOP that will allow the program to run, was presented in the series of articles: "Adventures In The RAM Jungle And Other Mysteries" (see Sept/Oct '85 thru Jan/Feb '86 issues of TDM).

When the computer is turned on, the address of RAM-TOP is the first nonexistent byte at the top of the user

25 POKE 18001,255

availble Random Access Memory (RAM). For the 1k ZX81, this address will be 17408; for the 2k TS 1000 it will be 18432; and for the 16k TS 1500 it will be 32768. When a 16k Ram pack (TS 1016) is attached and the computer turned on, RAMTOP is at address 32768 for all three computers. To check the address of RAMTOP, ENTER:

PRINT PEEK 16388+256*PEEK 16389

This only returns the value stored in the system variable RAMTOP. To check that RAMTOP is actually at this address, let A= the address stored in the system variable. Then ENTER:

PRINT PEEK (A-1)

The result should be 62

In the case of the TS 1500 with the 16k Ram Pack attached, the bytes from address 32768 to 49151 above RAMTOP and can be used for storage of data including machine code programs. Any part or all of the additional memory can be incorporated into the BASIC programming area by raising RAMTOP. Of course RAMTOP can also be lowered.

Should you have an odd amount of RAM, to find the maximum address to set RAMTOP, add to 16 the k of the RAM and multiply by 1024 (the number of bytes in one k). For example, if you have four k RAM:

(16+4)*1024=20480

However, the maximum address that you could set RAMTOP is 65535 not 65536 as the maximum value you can POKE into an address is 255.

RAMTOP can be lowered to make room for the storage of data by POKEing the address desired into the system variable RAMTOP and then entering NEW. The system variable RAMTOP consists of two bytes located at addresses 16388 and 16389. The formulas for POKEing the low byte into the lower addresses and high byte into the higher addresses are given on page 134 of the TS 1000 and page 160 of the TS 1500 User Manuals. For example, to set RAMTOP to 18000, then n=16388 and v=18000. Substituting in the formulas, type into the computer:

> 10 POKE 16388,18000-256*INT (1 8000/256)

> 20 POKE 16388+1, INT (18000/256 1

30 NEW

Now RUN the program. To check that RAMTOP was moved, ENTER:

PRINT PEEK 17999

The result will be 62. As you can see, the NEW command wipes out the program. It also destroys any variables, strings and dimensions. This precludes the use of this method of setting RAMTOP in a module designed to automatically LOAD the next module of a chained program. A routine for setting RAMTOP without destroying the program or any variables or strings was presented on pages 9 and 10 of the July/August '85 issue.

Although RAMTOP cannot be set using NEW in a module designed to LOAD the next module, it is used in some types of programs where the operator does the linking. NEW is also used where machine code is to be shifted above RAMTOP to wipe out the program in order that a new program be typed into the computer. This can be accomplished by POKEing the code into the Safe Area for the program, before the line containing NEW. For example, clear the computer memory by turning it off and then back on. Type in the program given above adding the following line:

RUN the program. Now ENTER the direct command:

PRINT PEEK 18001


As you can see the 255 is still in address 18001, RAMTOP is set below this at 18000, and the program has been destroyed.

For the 1k RAM ZX81: Set RAMTOP to 17000 using v= 17000, PEEK 16999 for the 62, change Line 25 for address

17001, and PEEK 17001 for the 255.

If you intend to do serious programming, work with chained programs or use word processors, then you should have two accessories besides an interfaced printer. The first is a tape recorder (or other storage device) capable of consistant SAVEs and LOADs. Two is even better, one for LOADing programs or data connected Ear to Ear with the computer, the other for SAVEing programs or data connected Mic to Mic. I use a Radio Shack CTR-51 only for LOADing as it has a wider allowable volume control setting range on some commercially produced software. My other tape recorder is a GE Computer Data Recorder model no. 3-5158B.

The second accessory is an emergency power supply particularly in Florida where we refer to the power company as "Florida Flicker and FLash". Figure No.1 is a circuit diagram for an automatic emergency power supply that will maintain the program for power interuptions up to 15 minutes. You must remember to throw the switch off before disconnecting the regular computer power supply or before plugging into the computer.

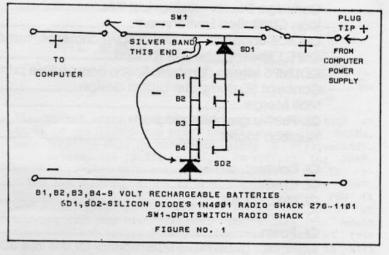

In addition to the parts listed on the diagram, you will need the following items:

1 project box large enough to accomodate the circuit plus the four batteries.

1 rubber grommet to protect the leads to the computer.

4 nine volt battery connectors.

1 two conductor 1/8" modular phone jack, open cir-

cuit type, panel mounting (Radio Shack 274-251). 1 two conductor 1/8" mini phone plug (Radio Shack 274-286).

The use of a 12 volt latern battery instead of rechargeable 9 volt batteries and a battery powered tape recorder, would allow the SAVEing of the program or data. However, leaving the switch on inadvertantly without the computer power supply on could be costly. If you use the 12 volt battery, also use 2.5 amp silicon diodes (Radio Shack 276-1114). As diodes are easily damaged with heat...heat sink them while soldering.

A practical chained program illustrating the Above RAMTOP method of passing data will be presented in Part

Four of this series of articles.

A+ Computer Response Authorized Dealer

MARKEL ENTERPRISES

Post Office Box 2392 Secaucus, New Jersy 07094-0992 (718) 627-1293

Serving the Sinclair community since 1982!

QL Computer w/software & free ADDRESS BOOK software	\$289.95
QL Vision RGB color monitor (w/cable) while supply lasts	
QL Near Letter Quality printer (w/cable)	
QL Computer w/monitor -or- printer	\$575.OO
QL Computer w/monitor -AND- printer	\$795.00
512K RAM expansion w/thruport	\$220.00
QL technical guide	
Microdrive Cartridges - book of 4	\$10.95
RS232 Printer Cable	
Modapter - for use with all RS232C modems - w/software	\$54.95
QL Monitor	\$39.95
QL Touch and Go Typing Tutor	\$25.95
QL Gardener	
QL Decision Maker	\$49.95
QL Project Planner	
QL Entrepeneur.	
QL Assembler	
Cartridge Doctor - restore lost files	\$23.95
Icon Controlled Environment	\$39.95
CHOice cartridge (multitasking/mailmerge/ramdisk) for I.C.E	\$24.95
QSPELL spelling checker for Quill	\$34.95
QDUMPS screen dumps to Epson compatible printers	\$15.95
Concept 3D computer aided design	\$39.95
Mail Merge	
QL Peintre graphics program	\$34.95
Nucleon toolkit	\$39.95
QL Caverns	\$15.95
QL Chess	
QL Matchpoint	\$24.95
QL Bounder	\$29.95
QL Pawn	\$36.95
Wanderer (must have RGB monitor for this true 3D game)	
VROOM	\$29.95
Karate	
War in the East - Master Module & Secenario I	
Master Module & Scenarios I & II	
Master Module & Scenarios I, II & III	\$59.95
Individual Scenarios	\$19.95

PASCAL, FORTRAN AND OTHER LANGUAGES AVAILABLE...WRITE FOR DETAILS

FREE I.C.E. CARTRIDGE WITH EACH QL ORDERED BEFORE DECEMBER 25, 1986

----STUDENT DISCOUNTS---

MORE ITEMS BEING ADDED DAILY AS WE EXPAND OUR QL SUPPORT. IF IT'S NOT LISTED - WE CAN GET IT - PLEASE CALL OR WRITE.

ADD 3% FOR SHIPPING AND HANDLING.
NY AND NJ RESIDENTS ADD APPROPRIATE SALES TAX.

Understanding And Upgrading The TS1016 RAM Pack

by Tim Stoddard

This is the first of a two part article on how dynamic rams operate, how the TS1016 works, and how to upgrade the ram pack to use the newer 5 volt-only 64k dynamic rams.

First let me put to rest all the fears that are probably running through your minds right now! Dynamic rams have had a bum rap for years. They are not only EASY to use but they are also much easier to wire up! Have you wired, or can you imagine wiring up, an array of 64k memory using static random access memory? Even if you used the now inexpensive 6116 CMOS 2k byte-wide rams you would need 32 of them, plus the supporting selection logic on a board that will barely fit in an \$100 system! If you used the affordably latest in CMOS ram (8k byte-wide), then the resulting 8 28-pin chips plus selection logic would fit on a board about the same size as your T\$1000/ZX81 computer!


Dynamic rams, or DRAMs for short, are constructed of simply one transistor and one capacitor per data bit. Static Rams, or SRAMs for short, are constructed of a flip-flop consisting of 4 or more transistors per bit. Right off you can see that the SRAMs consume much more power and much more die space (die is the actual silicon chip that the DRAM is made of) than DRAMs. DRAMs are not without fault, however, in that they require a small amount of attention to timing, and refresh to use.

With SRAMs you simply supply an address and wait the required access time for the data to appear at the output. DRAMs, on the other hand, require multiplexing of the address bus. Why? Take a look at a typical DRAM such as the one in your TS1016 ram pack and count the leads on the IC body. I count 16. Well, lets see...the 4116 rams used in the TS1016 ram pack need 3 supply voltages and ground (+5, +12, -5, GND)...that leaves us 12 leads for address and control; or for the 64k DRAM, 2 leads are used for power (+5, GND), so that would leave 14 pins for address and control. Now let's supply the 14 address lines needed for 16k, or for the 64k DRAM 16 address lines...oops, we just ran out of pins.

The manufacturers came up with a scheme for cramming 14 lines into the 7 that are needed for the 16k DRAM, or 16 lines into 8 needed for the 64k DRAM by multiplexing them: First, you supply the lower 7 or 8 address bits to the address lines and strobe them into the DRAM. The DRAM contains a Row address latch that holds these 7 or 8 address bits, and in fact, the strobe line used to strobe them in, is called RAS (Row Address Strobe). Next, we switch to the upper 7 or 8 address lines via a TTL multiplexer switch and then strobe in the column address using a second strobe line on the DRAM chip called CAS (Column Address Strobe). Lastly, we wait the required access time and then read the data out of the DRAM. The only other requirement we must observe is the refresh timing needed by the DRAMs.

Since each bit in a DRAM consists of just one transistor and a capacitor, it is easy to see that there is no stable state like that in flip-flop type memory found in SRAMs. The capacitor soon starts to lose its charge via leakages of one type or another, and before you know it you've lost the state that was stored in that capacitor. In order not to lose the capacitor's state we must periodically refresh each capacitor to preserve its current state. Refresh simply means that we want to preserve whatever state the storage capacitor is currently in, the two states being charged for a logic high, or discharged for a logic low.

The manufacturers determined that if each capacitor was refreshed within a specific amount of time, enough of its charge would still be there to determine what

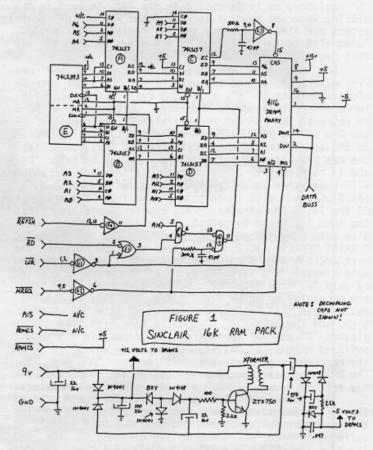

its current state should be. For most 16k DRAMs such as those in the TS1016 ram pack, and the newer 64k DRAMs, each location must be refreshed every 2 milliseconds.

Reading all 16,384 locations to refresh the DRAM, would a considerable amount of time. Another way to refresh the DRAM is needed to keep the refresh time down. One way takes into account the fact that when a row is addressed, that ENTIRE ROW is refreshed! So if we address just 128 row locations, the entire 16k would have been refreshed. I should also point out at this time that the 64k drams are internally arranged so that they only need 128 row refreshes to refresh the entire DRAM. They are internally set up as four 16k blocks. Since the row addresses are supplied to each of the four 16k blocks at once, it follows that only 128 refresh cycles will refresh the entire DRAM.

A method that takes advantage of an entire row being refreshed while applying the row address is called RAS only refresh. It is enabled by supplying the refresh address to the address pins of the DRAM and then enabling the RAS line ONLY. This will refresh the entire row addressed by the address pins. Also, since we do not supply the column address and the CAS signal, the DRAM will not complete a true read operation, and therefore, will not output any data, but will remain in a tri-state condition.

There are a number of other refresh modes, especially in the newer 64k and 256k DRAMs, and if there is enough interest in this article, I'll describe those modes in a future article. For now, let's proceed to the inter-workings of the TS1016 ram pack with this new knowledge of DRAMs under our belts.

I could not procure a schematic of the ram pack, so I dissected a ram pack that I own and drew a schematic

from that. During the following discussion, please use the schematic in figure 1, and the timing relationships

in figure 2.

The first thing you Z80 hackers will notice is that there is a refresh counter in the ram pack. Anyone who has worked with the Z80 knows that it has its own refresh counter on chip, so why use an external one? The "R" register, as it is called in the Z80, is used in the display interupt routine to count the number of characters per line, and since the "R" register is manipulated alot in this routine, it would not be wise to use this register to preserve your data.

ICs "A" and "B" are 74LS157s (quad 2 line to one line multiplexers) and are used to switch in the refresh address counter IC "E", a 74LS393 dual binary counter. The counter is needed to "remember" what address we need to refresh. The refresh request signal is supplied by the Z80 CPU in your TS/ZX computer and is called REFSH on the schematic. So when REFSH (active low) comes into the ram pack it gets buffered and inverted by gate "F4" and is then sent to pin 1 of both ICs "A" and "B" $\,$ which will cause them to select the inputs suffixed with a "1" (A1,B1,C1, and D1). Those inputs come from the outputs of the 74LS 393 refresh address counter. Note also that the same line used to select the refresh counter will also advance the counter one count AT THE END OF THE CURRENT REFRESH CYCLE. The counter will now contain the next address needed to refresh. ICs "C" and "D", also multiplexers, are switched by gate "G4" which is enabled by gate "F1" via gate "F2". During a refresh cycle there are no active RD or WR signals from the Z80, so the output of gate "F1" is low, the output of gate "F2" then is high, and the output of IC "G4" is also high. The multiplexers "C" and "D" therefore, take input via the inputs suffixed with a "1" (A1,B1,C1, and D1), which is from the refresh counter via the multiplexers "A" and The DRAM address lines are at this point "connected" to the refresh counter IC "E" via the four multiplexers.

The last requirement to refresh the DRAM is to supply the RAS signal. This is accomplished with the MREQ signal supplied by the Z80 CPU. The MREQ signal buffered by gate "G2" and supplied directly to the RAS input of the DRAM. This low-going signal latches the refresh address in the DRAM causing that entire row to refresh. Note that since gate "G4" is disqualified by the output from gate "F2", which we discussed earlier, its output will never change during the refresh cycle. This will keep the refresh address supplied to the DRAM and also keep the CAS line to the DRAM inactive (high) throughout the refresh cycle, thus preventing a true read operation of the DRAM. The output of the DRAM, therefore, during refresh is at its tri-state condition. The MREQ signal now goes inactive (high) which removes the RAS signal from the DRAM ending the refresh cycle. Finally, the inverted REFSH signal coming out of gate "F4" now goes low, switching the multiplexers "B" back to the system address lines, and at the same time the low-going signal advances the refresh counter IC "E" via pin 1 to the next row address in preparation for the next refresh cycle. That wasn't so bad was it? Now for a RD/WR cycle.

First, keep in mind that because the REFSH signal is inactive during a read or write cycle, the multiplexers "A" and "B" are supplying address lines AO through A6 to the inputs suffixed with a "1" on multi-plexers "C" and "D". Multiplexers "C" and "D" now select either system address lines AO through A6, or system

address lines A7 through A13.

The first signal to occur after the system has supplied the proper address is the MREQ signal. This signal, after passing through buffer "G2", is supplied to the RAS pin of the DRAM. At this instant, when the RAS signal has just gone active (low), the DRAM is "looking" at system address lines AO-A6, and this address gets latched into the DRAM's internal RAS latch. and this MREQ is also supplied to gate "G4" via a time delay net-

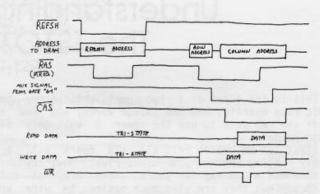


FIGURE 2

work consisting of a 300 ohm resistor and a 47 PF cap.; and befor the MREQ signal has had time to get through the time delay circuit, the output of gate "G4" is at its inactive (high) state. This keeps multiplexers and "D" selecting address lines AO-A6 via multiplexers "A" and "B". About 50 to 100 nanoseconds later the MREQ signal finally gets through the time delay circuit and partially enables gate "G4". The other leg of gate "G4" is enabled for a read or write operation (which we are

doing) and system address line A14.

System address line Al4, when in its high state, is used to select the ram pack by placing it in the 16k to 32k system address range. Note that since the address line Al5 is not defined anywhere, a mirror image of the ram pack will be found in the 48k to 64k area of system ram. Anyway, gate "G4" is now active and its output goes active (low). This signal now switches the multiplexers "C" and "D" to the system address lines A7-Al3. Note, too, that for multiplexer "C" the output ZC goes from high to low via inputs CO and C1. This will supply a low going signal to a second time delay circuit. Why? We have just switched the address lines to the DRAM and before latching the address in the DRAM, we must now allow some time for the multiplexer output to "settle" before enabling the CAS signal to the DRAM, this time is given to us with the second time delay circuit. After 50 to 100 nanoseconds the signal gets thru the time delay circuit and is supplied to the CAS pin on the DRAM. This latches address lines A7-A13 into the CAS latch in the DRAM. About 50 nanoseconds later, the DRAM will supply its output data via pin 14 to the system data buss during a read cycle, or for a write, it will strobe in the data from the data buss on the falling edge of the Z80 supplied WR signal.

The only way the DRAM knows what type of cycle the Z80 is in, is via pin 3 on the DRAM. When low, it is a write cycle, and when high, a read cycle. This signal is supplied by the Z80 CPU and occurs during the MREQ signal. After the Z80 has read or written the data, it will make the MREQ signal inactive (high), this will then make RAS inactive (high), also causing gate "G4" to switch multiplexers "C" and "D" back to inputs A1-D1 $\,$ thus causing CAS to go inactive, tri-stating the DRAMs

The one transistor circuit at the bottom of the schematic is a DC to DC converter that supplies the needed +12 and -5 volt bias supplies for the 4116 DRAMs. This circuit is a source of a lot of noise and will be

eradicated when we upgrade the ram pack.


data output and ending the read/write cycle.

I know that the above discussion is somewhat "dry". but if you can come to understand what is going on, you'll be a long way into understanding what makes your computer "tick"!

In the next issue, I'll present the needed modifications to upgrade the TS1016 to 64k, plus some of the unusual restrictions imposed by the TS1000/ZX81 architecture in designing 64k ram systems.

POWERFUL AND INEXPENSIVE BUSINESS SOFTWARE FOR ZX81, T/S1000 and T/S1500 COMPUTERS

ZX-TEXT



A word processor is to a computer user what a typewriter is to a typist, except that the former has more advantages than the latter. ZX-Text can operate in 16-64K RAM providing from 1300 to 6500 words per document. It features 6 different options: write, read, edit, print, save and clear text. Text is written on a per-line basis with quick speed and with horizontal back-space and delete capabilities being available. You can also access the editor directly from write mode and vice-versa. Text can be proof-read on a per-line basis allowing for enough time to determine if any editing is needed. The text editor allows a line of text to be deleted, inserted, replaced and listed for editing. You may also change a word or expression within a line, stop or start text while it is scrolling up the screen, begin reading text from the first line of the file, reenter write mode from the editor, return to the main-menu or create a window so that you can read-edit two files simultaneously. The print option takes text displayed in 30-column format on the screen and outputs to either the ZX/TS printer. (With Memotech's Centronics Parallel Interface 80-column and lower/ higher - case output is possible.) Files may be saved on tape cassette with the use of one single command, or by the same token they can be erased from memory / storage so that the full capacity of the program can be used for other purposes such as composing letters, reports, articles, memos, standard forms, instructions, ads, graphs, telephone directory, lists of customers, members, friends...etc. Also copies of files are always less expensive and easier to run than using a photocopier. Other advantages are savings in time, paper, ink, correcting mistakes and adding afterthoughts more efficiently than doing them through either handwriting or


\$16.95

ZX-CALC



An electronic spreadsheet calculator is the fundamental basic tool for summarising, reporting and analyzing in matrix form any accounting, mathematical or scientific manipulation of numbers. ZX-Calc operates in 32-64K RAM and affords a maximum of 3360 characters / spreadsheet. The entire matrix consists of 15 columns (letters A-O) and 30 rows (numbers 1-30) with 8 characters/ cell. Unlike other popular ESCs, ZX-Calc uses in calculations and within cells all 14 math functions on the ZX-81/TS1000. It offers a unique *SUM function that totals one or more rows/columns simultaneously. Parenthesis can be used within equations. There is no fixed limit on how many equations may be entered. Formulas may be stored in all 420 cells of the spreadsheet. The display affords 15 rows/colums. Loading of data into more than one cell can occur across/down one or more row/column simultaneously. With vertical windowing you can arrange a set of columns in any order, or practice using fixed-variablealignment display formats. The menu offers 6 options; enter/erase, move, calculate, print save and clear the spreadsheet. Enter/erase allows the entering, deletion or data alignment within a cell through the use of a mobile cursor. With the move option you may move around the entire sreadsheet to access any row, column or cell. The calculate option allows you to enter labels, values or formulas into a cell or write and enter equations that will act upon the data already within the spreadsheet. You can also enter bar graphs into a cell in this option. Absolute / relative replication, down/across a column/row, is also allowed by this option. Also this option allows the automatic calculation of the entire spreadsheet with one single command. Print allows you to output to either the ZX/TS printer the entire spreadsheet by column-sets and row-pages through use of the COPY command. The entire spreadsheet may be saved on cassette tape or you may clear all data from it or erase the program from RAM entirely The most salient advantage provided by an ESC over specifically vertical applications software is that an ESC provides a reusable framework with which you can compose any specific financial model rather than just be limited to only one statically fixed format for storing, displaying and manipulating numerical data

ZX-CALENDAR



Time management is an important aspect of any serious business and personal agenda. Planning how to spend our time leaves us better prepared before and while we are spending it and we remain better organized after we finish spending it. ZX-Calendar operates in 16-64K RAM affording 25 appointments in 16K, 100 in 32K or 180 in 48K and 64K. Each appointment record holds a maximum of 220 characters. The main menu includes enter, search/check/sort, change, save, clear and print any and all appointments made on a specific date or with any party. Output to either the ZX/TS printer is permissible. This program will permit you to remember to do something or to be somewhere important by cataloging your answers to six questions that you must account for in order not to waste time when it is scarce: when, with whom, at what time, for how long, where and what are you going to discuss and conclude when you get together with someone else? The program lets you permanently originate, record, classify, search, sort, calculate, modify, summarize, obtain a written report and store your answers to the preceding questions so that you will not forget what you decide to do with your time. This program identifies your time according to when you are going to spend it and with whom you are going to share it. Through these forms of labeling appointments you are able to verify or modify how your time is budgeted without wasting ink, paper or more time trying to remember what you said to yourself or what someone else said to you or where you placed certain written messages that you now can't find. With this program you will know where you can find exactly what you need to know about where you want to and have to be, or where you have been, before you get and after you got there. Thus, ZX-Calendar will let you plan your time so that you will never have to worry about what is ahead or what came before, for you will always know, by using it, to never be caught astray by any time-frame.

\$16.95

\$16.95 \$3.00 SHIPPING AND HANDLING/PROGRAM

A.F.R. SOFTWARE - 1605 Pennsylvania Avenue, No. 204 - Miami Beach, Florida 33139

DEALER INQUIRIES WELCOME (305) 531-6464 FLORIDIANS ADD SALES TAX

using a typewriter.


WEYMIL CORPORATION

...makes a serious commitment to the Timex user in the development of high-quality, innovative, and user-friendly software, complete with layman-oriented documentation, and all at affordable prices. We are proud to offer you:

* THRUST*

Finally, real graphics power for your TS 1000! *THRUST*, the last word in cursor-controlled hi-res graphics for screen or printer output, is a software package composed of *SincArtist HR* and *SincArtist 1.3*. Examine this sample for an idea of the powerful versitility of *THRUST*.

SINCARTIST 1.3 - The original! Fantastic hi-res graphics delivered to the 2040 printer. SincArtist 1.3 boasts excellent user-group reviews and is simply the best non-hardware system available. Note these features:

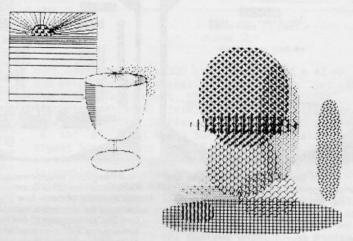

- 192 x 256 high-resolution file displayed in a 48 x 64 screen window
- Circles, triangles, rectangles, quadrilaterals, rays, inversing, and more
- 40 redefinable patterns and a variety of draw and fill modes
- Cursor or joystick control
- No system modifications required

SINCARTIST HR - The last word in cursor-controlled high-resolution screen graphics. Copy artwork to the 2040 printer and save to tape. SincArtist HR requires a TS 1000 with a socketed 2K RAM, less than \$10.00 in parts, and a few minutes with a soldering iron. Super user-friendly documentation and instructions included. All modifications are fully transparent to other peripherals. HUNTER BOARD OWNERS: All you need is the FREE hardware upgrade that we provide!!!!!

THRUST includes SincArtist HR and Sinc-Artist 1.3 (these programs are not sold separately). The Ultimate Hi-Res Tape is available exclusively from Weymil Corporation for only \$20.

* MINI XMOD *

MINI XMOD - Allows your *Westridge* or *Byte-Back* modem to up and download Timex programs to any XModem protocol BBS.

- Fully documented with easy-to-follow instructions for the layman
- 16K and 64K versions included
- Ideal for storage in Hunter Board
- Produced on high-quality casette for the ZX 81, TS 1000, and TS 1500

MINI XMOD is available from Weymil Corporation for only \$20. Please specify Westridge or Byte-Back version.

WEYMIL CORPORATION BOX 5904 BELLINGHAM, WA 98227-5904

(Write for a free catalogue of other TS 2068 and TS 1000 products)

CLASSIFIED

FREE ADS FOR SUBSCRIBERS

ADVENTURERS! Join in the fastest growing hint trading group in North America. Send SASE with hints, and problems, for prompt reply to: Douglas Jeffery, Larch Rd., RR #1 Telkwa, B.C., Canada VOJ 2XO.

WANTED: Programs for TS-1000 to trade. Send me your list and large SASE. Also programs for above 16K RAM. Anyone have a copy of Memotech Memopak 64K Memory Instruction Manual? Any information will be appreciated. Richard Beier, One Darwin Drive, N. Merick, NY 11566.

AERCO C/P \$50; TS-1000 with power supply and man. \$10; 2068 Software \$35. D. Gustafson, P.O. Box 3700, Pens. FL 32516 (OS-64, ML Tutor, VU-3D, MSCRIPT/disc).

SOFTWARE for TS-2068, TS-1000, and AERCO FD-68. New and used hardware/software. SASE for free catalog. Chia-Chi Chao, 73 Sullivan Dr., Moraga, CA 94556.

WOULD LIKE TO CONTACT another Zebra Graphics Tablet User. Need more info on Interface and Software--Alvin Lam, 1258 Fascination Circle, Richmond, CA 94803.

COMING SOON. MONEY MACHINE II.
Now starring VANNA WHITE. Send
SASE for FREE LLISTing of Vanna
White moving graphic. Herb Bowers,
2588 Woodshire Cr., Chesapeake, VA
23323.

SINCLAIR QL COMPUTER and extra software, \$275 used. Delta 3-in-1 interface with 128K, a disk interface and parallel printer port, \$225. Two 3" Amdek disk drives, power supply and cable, \$125. ALL for \$550 and shipping. 904/378-9000 evenings.

FOR SALE: extra copy of 352-page QL ADVANCED USER GUIDE by Adrian Dickens--THE authoritative guide to the QL & QDOS. Asking \$20 ppd (compare at \$29.95) send to Paul Bingham, POB 2034, Mesa, AZ 85204.

T/S 2068 UTILITIES: Auto-line Number, Renumber (GOTOs, GOSUBs, ect.), Read Tape Header, Display Vars., Find String in Prog. \$10. Michael Cover, 1405 Chevington Cir., Zanesville, OH 43701.

FOR SALE: Over 30 game programs for T/S 2068 or Spectrum at \$8.00 (U.S.). Send for a list of software available or phone (403) 236-4465. Garvin Bertrand, #311 135 Lynnview Rd. S.E., Calgary, Alberta Canada T2C 2G6.

6 TS BOOKS FOR SALE: Working 2068, Creative Games For 2068, Games For 2068, TS 2068 Explored, The 2068, 200 Computer Programs In BASIC For 1000 + 2068. C. Lytle, 1064 Worth. Woods, Worth., OH 43085.

T/S 1000, 2050 MODEM, Millenia K Disk I/F, Zebra Lightpen, lots of S/W: 615-823-2078 p.m. only. D. Taylor, Rt 4 Box 303-A, Livingston, TN 38570 for titles, prices, more info.

FOR SALE: 2068 w/Tech Manual, Alphacom 32 printer, 2 programs & 3 texts. ZX81, Winkee & 6 texts. 100 hrs on each. S.L. Jacobs, Rt 3 Box 2750, Dexter, ME 04930, 207-924-6414

Do you have some equipment or a program that you would like to sell? Looking for something hard to find? Place an ad in THE CLASSIFIEDS! Subscribers can place one free personal ad in each issue. Ad size is 32 Col. wide (like 2040 paper) and maximum of six lines. For additional lines - \$3 each. NON-SUBSCRIBERS and DEALERS: \$4 a line. DEADLINE FOR ALL CLASSIFIED ADS: Two weeks before publication date. Mail your ad to: TIME DESIGNS MAGAZINE, The Classifieds Dept., 29722 Hult Rd., Colton, Oregon 97017.

WANTED TO BUY: Ramex Millennia K Disk Drive System w/MPI 1-meg drive. Also same drive #2 for above. Send price quote to- B. Hardware c/o Jim, 132 1st Ave. S., Perham, MN 56573. 218-346-4760.

WANTED: Screen dump program on cassette to drive Tandy CGP-220 Color Ink Jet Printer for TS-2068 w/ Tasman B I/F and/or on mcdrive for QL. Michael Kudelka, 4859 Sacramento, St Louis, MO 63115.

FOR T/S 2068: 3-Reel 9-Way Win Giant Slot Machine on cassette. All in BASIC & listable, about 32K with Stick/Inkeys provision. Send \$6.00 to D. JEWETT, 63 Charro Dr., Santa Rosa, CA 95401. Includes shipping.

WOULD LIKE TO CONTACT MIDI I/F OWNERS who use 2068 or Spectrum and any keyboard. Professional musicians or amateur hobbyists. May start Sinclair MIDI users group/newsletter. Write to: Tim Woods c/o TIME DESIGNS, 29722 Hult Rd., Colton, OR 97017

QL MULTI-MICRO SPECIAL: \$288 WITH FREE EXTRA SOFTWARE!

Get an Extra FREEWARE cartridge Filled with additional Software with ALL QL purchases right NOW! Get Backup Utilities, Graphics Demos, Clocks, Maps, Sound Generators, a Postermaker! Too Much to mention! All with each QL ordered. Add \$7.00 for S&H please. ALSO: SPECIAL PROGRAMMERS. OS/LANGUAGES. EDUCATIONAL & BUSINESS SYSTEM PACKAGES! MODEMS. CALL us up on our Q Line!


But what IF you Already HAVE your QL?? THEN Just send in a blank cartridge with \$2.00 for S&H and you'll get all of the above FREE Programs Too! We offer users QUANTUM SUPPORT for the QL! The Computer That By Far Outclasses the Status Quo PCXTAT & Cloneys!

QUANTUM COMPUTING, Box 1280, Dover, N.J. 07801 CALL: (201) 328-8846 The QLINE - ANYTIME 24 HOURS!

ORDER OUR CATALOG!

and get this FREE Software on cassette...

FOR THE TS2068



- 1. 3D Moving Display
- 2. 3D Pyramid
- 3. DIAMOND MIKE game demo
- 4. 3D Tic-Tac-Toe demo
- 5. Plus commentary by programmer John Coffey on 32-bit computers.


Our unique product catalog and free software all on a quality tape only...

\$1.00

Order Yours Today!

JRC Software

P.O. Box 448 Scottsburg, IN 47170

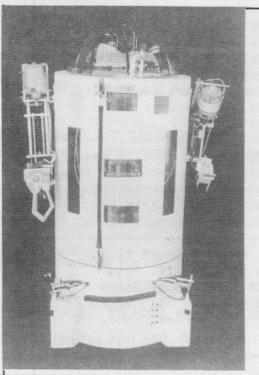

"Greetings human, I am H.E.N.R.Y., winner of the Golden Droid Award at the First International Personal Robot Congress and Expo in 1984. You may be surprised to hear that my brain is really a Timex/Sinclair 1000 computer. In fact, you can learn more about me and other projects in a new book by my master, Bruce C. Taylor. The book is called: BUILD A MICROCOMPUTER-CONTROLLED ROBOT. It has over 200 pages, over 80 illustrations, and comes with a great looking custom 3-ring binder. There is even a bonus section for instructors who would like to teach about robotics. You can get your very own copy for only \$17.00 (postage paid) from the nice folks at TIME DESIGNS MAGAZINE COMPANY. Get a head start on personal robotics...the newest high-tech craze. Get my book, and read all about me...how could you go wrong

Quality Publications For Sinclair Computers

TIME DESIGNS MAGAZINE COMPANY
29722 Hult Rd. • Colton, Oregon 97017

TS2068 Trackball Only \$19.95



Originally sold for \$69.95 Specify Cat# TBTMX02

Plugs into TS2068 Joystick Port and works with all joystick software.

Bonus Feature: Also works on Commodore 64, VIC-20, ATARI 800, and more. Contact factory for more complete list.

You can benefit from our recent purchase of brand new WICO Trackball Controllers at closeout prices. We've taken the model WICO originally made for the Texas Instrument 99/4A and made a very simple modification so it now is fully compatible with the Timex TS2068's joystick port.

WICO is the largest designer and manufacturer of control devices for commercial arcade video games. If you've ever played an arcade video game, chances are you've used a WICO joystick or trackball. You've experienced the superior control. The pinpoint firing accuracy. The exceptional durability.

Features: Phoenolic ball offers 360-degree movement. Two optical encoders provide split-second movement. Quick-action fire button for smooth, two handed arcade response and feel. Long 5' computer connection. Heavy duty plastic case for long hard use.

The WICO warranty has been voided by our modification. But we give you our 15-day money back guarantee and a one-year limited warranty from Zebra Systems.

Timex Games \$2 Each

With your order for a TS2068 trackball you can purchase any of the following Timex TS2068 Trackball and Joystick compatible games at the special low price of \$2.00 each for cassettes and \$3.00 for cartridges.

CAT# TITLE

Cassettes at \$2.00 each

64001 Androids

64002 Penetrator

64004 Casino I

64005 Crossfire

64006 Circuit Board Scramble

64007 Dragmaster

64009 Guardian

64012 Fun Golf

CAT# TITLE

64014 Hungry Horace

64015 Horace Goes Skiing

64019 Horace and the Spiders

64021 Blind Alley

64023 Crazybugs

Cartridges at 3.00 each

74001 Androids

74005 Crazybugs

\$5 Off Tech-Draw Jr.

You can save \$5.00 on the purchase of Tech-Draw Jr. if you purchase it at the same time as a TS2068 trackball. Instead of the regular price of 19.95 you can get it for 14.95. See our catalog for a complete description of Tech-Draw Jr. and a list of printers that it supports. Order Tech-draw Jr. Catalog# C256.





TS1000 TRACKBALL Only \$39.95


Originally sold for \$109.95 Specify Cat# TBTMX01

Plugs into the back of TS1000,1500,2068, or ZX81.

We've taken WICO's Apple II trackball and put its controller card on an interface adapter for the Timex bus. Now you can get all the benefits of the Apple Trackball with its intelligent controller card, on your Timex computer.

The Apple trackball controller has sixteen integrated circuits on it that read the optical electronic encoder wheels from the trackball and completely keep track of the trackball movement with separate x and y direction up/down counters. This enables your Timex computer to get the position of the trackball by just reading two input ports. This is a tremendous advantage on the TS1000, since the computer can be left in "SLOW" mode for smooth graphics, while the trackball interface card does all the work.

The Apple II trackballs alone originally sold for over one hundred dollars. Now you can take advantage of Zebra's recent purchase of a large number of them at closeout prices. You get the Apple II trackball with Apple interface card, Zebra's Timex- to-Apple bus adapter, and complete instruction manual with sample routines for all the Timex computers. And all for just \$39.95.

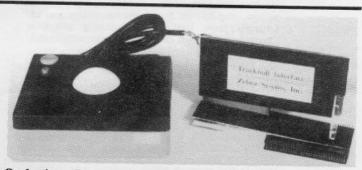

Ordering Instructions: Include \$3.00 S&H for UPS. P.O Boxes and other orders requiring U.S. Mail must add \$4.00 extra shipping per trackball. VISA/MC Accepted. NY Residents add sales tax. Order now! Quantites are limited to stock on hand.

Zebra Systems, Inc.

78-06 Jamaica Ave. Woodhaven, NY 11421 (718) 296-2385 HOURS: M-F 9AM-5PM

TRACKBALLS FOR OTHER COMPUTERS

We have bargain priced WICO trackballs adapted to just about every popular computer on the market. Send a SASE or call for a complete list.

WEYMIL presents...

A small collection of truly innovative products for Sinclair computers

THRUST TS1000

True hi-res graphics for the TS 1000. THRUST is two great programs on one tape. Sinc-Artist 1.3 is the most user friendly software ever developed for printer graphics. Completely cursor and menu driven. For Hunter Board users, there's Sinc-Artist HR which produces fantastic screen graphics. THRUST is both the most sophisticated and easiest to use hi-res graphics software ever developed for the TS 1000. If you are ready for no-nonsense, hassle free graphics, then THRUST is a "must have."

THRUST for the TS 1000 only \$20.00

ARTWORX V1.1 TS 2068

England's finest graphics package! ARTWORX V1.1 establishes a new standard for color graphics with features never before available on small systems. Auto speed control, pull down menus, unique cut and past windows, ZOOM!, elastic shapes, multiple fonts, CENTRONICS I/F capability for full-size print-outs, and more. All this plus an absolutely uncluttered screen for full creativity. Easy to use. The joystick controls EVERYHTING except text entry. The highly supportive well-written documentation is almost unnessesary.

ARTWORX V1.1 for the TS2068 only \$19.95

PIXEL SKETCH AND GRAPHICS EDITOR V2.0 TS 2068

This program by Stan Lemke still remains the finest graphics program produced in the United States and one of the best in the world for the TS 2068. It has had excellent user group reviews and is a snap to use. Well written, step-by-step documentation guides you effortlessly from loading to producing you own "masterpiece." Great pixel and text placement contol.

PIXEL SKETCH AND GRAPHICS EDITOR V2.0 only \$19.95

KRUNCHER TS 2068 / TS 1000

From the Pacific Northwest comes one of the most exciting utilities ever written. KRUNCHER takes any BASIC program for the TS 2068 or TS 1000 and instantly reduces it to the tightest BASIC possible thereby conserving precious memory. Imagine all of those little memory saving tips developed over the years in one program which performs automatically and takes up less than 190 bytes! Simply load KRUNCHER, locate it where you want it, load or write your BASIC progrm, invoke KRUNCHER, blink your eye and it's done. Memory savings average 20-40%. Great learning aid for programmers of all levels.

KRUNCHER for TS1000 or TS2068 only \$10.00 (Please specify TS1000 or TS2068)

TIME MACHINE TS 2068

The first SERIOUS COMPILER for the TS2068. Now you can convert BASIC programs to super fast MACHINE CODE without a lot of hassle. Converts both TS 2068 and SPECTRUM Programs. It functions as both an integer and floating point compiler simultaneously without the restrictions of either. Compiled code can be placed anywhere in RAM. Handles up to 27K of BASIC. Programs can be either written or loaded from tape. You've wainted a long time for this one and here it is!

TIME MACHINE for the TS2068 only \$19.95

RIGTER JOYSTICK INTERFACE TS 1000

This is a software programmable Atari-type joystick interface. it can handle up to 16 different directions or commands easily. It has it's own self-contained memory so that it's software occupies no system ram. The software allows you to configure your joystick to ANY TS1000 game or graphic software (THRUST, for example) and it's ready to go. Rear expansion bus allows other peripherals and the interface is completely transparent.

RIGTER JOYSTICK INTERFACE for TS 1000 only \$39.95

MINI XMOD TS 1000

Use your TS1000 and Westridge modem to up/download TS1000 software to any XMODEM BBS and see them run. Supports Memotech Centronics I/F and others for print-outs to full size printers. Standard RAM and Hunter Board versions included on same tape.

MINI XMOD for the TS 1000 only \$20.00

LOADER V TS 2068

This program turns MTERM into a REAL communications program. Here's what you get. Autorepeat dialing, extra 20 number dialing directory, full TASWORD II and MSCRIPT text file handling capability, disk drive and Wafer drive compatible, multiple loading of Mterm's buffer while on line, and full XMODEM capability. This program is the COMPLETE LOADER SERIES.

LOADER V for TS 2068 only \$10.00

CLONE TS 2068

A sophisticated program which allows the user to make back-up copies of ANY TS2068 or SPECTRUM software for their own use. Requires no fancy filters or extra tape recorders. Easy to follow instructions make it simple to protect your valuable originals.

CLONE for the TS2068 only \$10.00

SPECIAL OFFER!!!

Save \$5.00 when you order the combination of THRUST, RIGTER JOYSTICK INTERFACE, and KRUNCHER 1000 you pay only \$64.95

SHIPPING INSTRUCTIONS Please enclose \$2.00 shipping and handling with your order.

WEYMIL CORPORATION

BOX 5904 BELLINGHAM, WA 98227—5904